

Annex

A. LUT Energy System Transition Model

The LUT Energy System Transition Model (LUT-ESTM)¹⁻³ has integrated all crucial aspects of the power, heat, transport and industry sectors into an integrated energy system. Moreover, the model includes prosumers⁴, both power and heat, as part of the energy system. The fundamental process to modelling energy system transition pathways from data to results is shown in Figure A1.

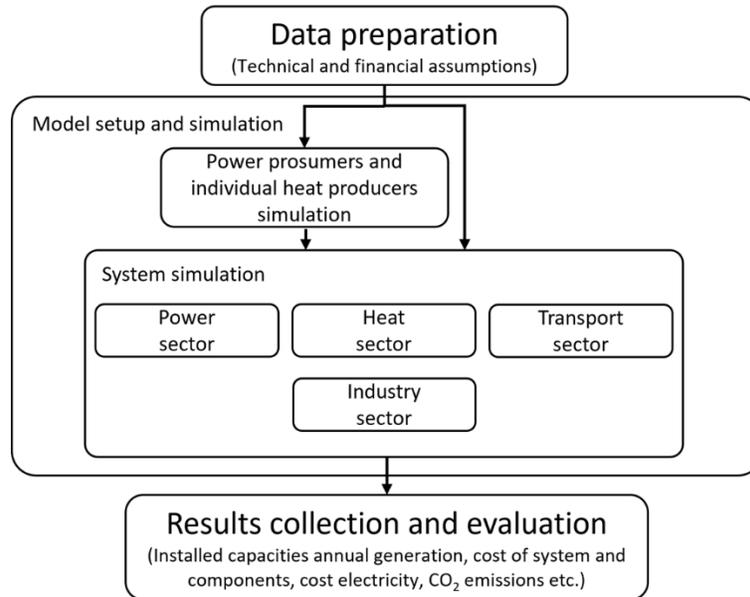


Figure A1: Fundamental structure of the LUT Energy System Transition model³.

The optimisation model of the energy system is based on a linear optimisation of the system parameters under a set of applied constraints with the assumption of a perfect foresight of renewable energy generation and energy demand. A multi-node approach enables the description of any desired configuration of sub-regions and power transmission interconnections. The main constraint for the optimisation is the matching of total energy generation and total energy demand values for every hour of the applied year and the optimisation criterion is the minimum of the total annual cost of the system. The hourly resolution of the model significantly increases the computation time. However, it guarantees that for every hour of the year the total supply within a sub-region covers the local demand and enables a more precise system description including synergy effects of different system components.

The optimisation is performed in a third-party solver. Currently, the main option is MOSEK ver. 7, but other solvers (Gurobi, CPLEX, etc.) can also be used. The model is compiled in the Matlab environment in the LP file format, so that the model can be read by most of the available solvers. After the simulation, results are parsed back to the Matlab data structure and post-processed. A detailed description is provided in Bogdanov et al.¹⁻³.

Power, heat, transport and industry sectors

The model simulates an integrated energy system development under specific given conditions as shown in Figure A2. For every time step the model defines a cost optimal energy system structure and operation mode for the given set of constraints: power demand, space and domestic water heating, energy demand

for transport, energy and feedstock demand for industry, available generation and storage technologies, financial and technical parameters, and limits on installed capacities for all available technologies. The target of the optimisation is the minimisation of total system cost. Costs of the system are calculated as a sum of the annualised capital expenditures, operational expenditures (including ramping costs), fuel costs and CO₂ emissions costs for all available technologies. The transition simulation was performed for the period from 2020 to 2050 in five-year time intervals.

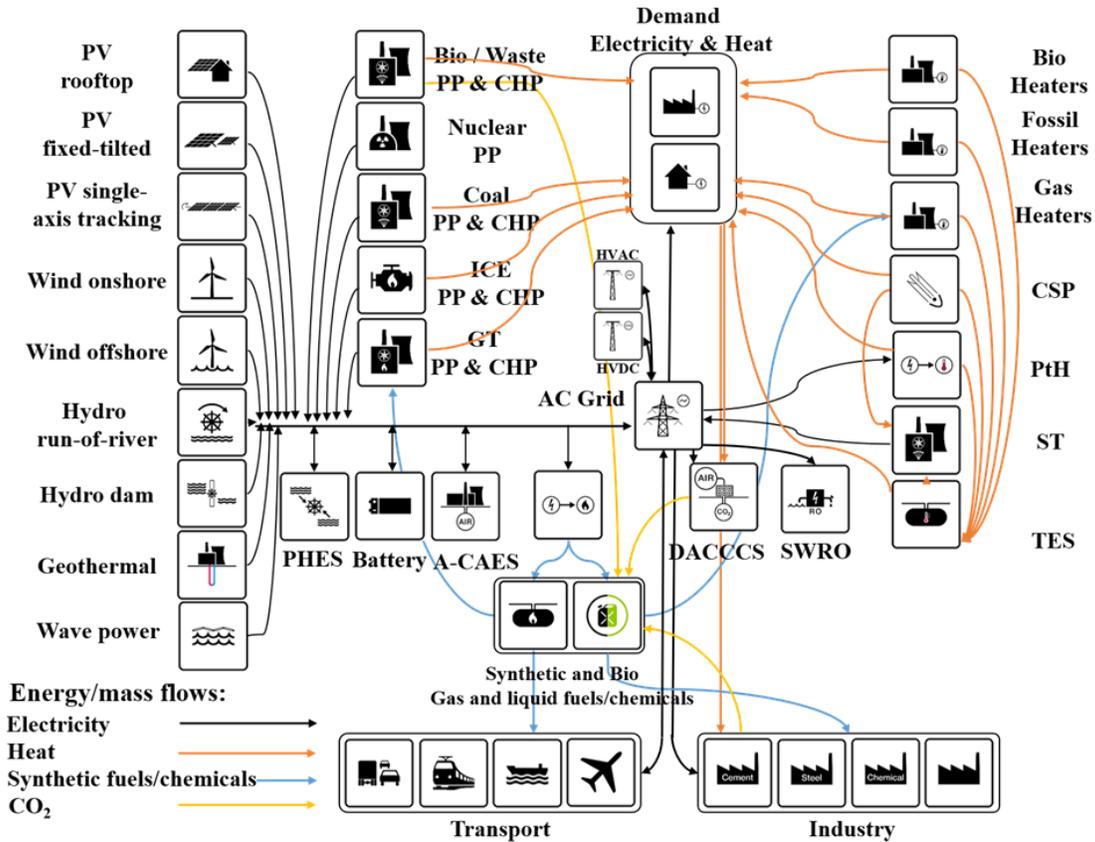


Figure A2: Schematic of the LUT Energy System Transition Model comprised of energy converters for electricity and heat, storage technologies, transmission options, and demand sectors³.

Prosumers: The distributed generation and self-consumption of residential, commercial, and industrial prosumers are included in the energy system analysis and defined with a special model describing the development of the individual power and heat generation capacities. Prosumers can install their own rooftop PV systems, lithium-ion batteries, buy power from the grid, or sell surplus electricity in order to fulfil their demand. At the same time prosumers can install individual heaters for space and water heating. The target function for prosumers is minimisation of the cost of consumed electricity and heat, calculated as a sum of self-generation equipment annual costs, costs of fuels, and costs of electricity consumed from the grid. The share of consumers that is expected to be interested in self-generation gradually increases from 9% in 2020 to an in-built limit of 20% by 2050. However, the limit of 20% can be reached earlier than 2050 through the transition depending on the scenario settings and retail electricity prices across the different countries and regions.

Energy system: The model has integrated all crucial aspects of an energy system. Fossil electricity generation technologies are coal power plants, combined heat and power (CHP), oil-based internal

combustion engine (ICE) and CHP, open cycle (OCGT) and combined cycle gas turbines (CCGT), and gas-based CHP. Renewable electricity generation technologies are solar PV (optimally fixed-tilted, single-axis north-south tracking, and rooftop), wind turbines (onshore and offshore), hydropower (run-of-river and reservoir), geothermal, and bioenergy (solid biomass, biogas, waste-to-energy power plants, and CHP). Fossil heat generation technologies are coal-based district heating, oil-based district and individual scale boilers, and gas-based district and individual scale boilers. RE-based heat generation technologies are concentrated solar thermal power (CSP) parabolic fields, individual solar thermal water heaters, geothermal district heaters, and bioenergy (solid biomass, biogas district heat, and individual boilers).

Storage technologies can be divided into three main categories:

- short-term storage – lithium-ion batteries and pumped hydro energy storage (PHES);
- medium-term storage – adiabatic compressed air energy storage (A-CAES), and high and medium temperature thermal energy storage (TES) technologies;
- long-term gas storage including power-to-gas (PtG: hydrogen, methane) technology, which allows the production of e-hydrogen and e-methane to be utilised in the system.

Sector coupling technologies are power-to-gas (e-hydrogen, e-methane), steam turbines, electrical heaters, district and individual scale heat pumps, and direct electrical heaters, but also power-to-mobility including smart EV charging and vehicle-to-grid. These technologies convert energy from one sector into valuable products for another sector in order to increase total system flexibility, efficiency, and decrease overall costs. A detailed overview can be found in Bogdanov et al.¹⁻³.

Transportation demand is derived for the modes: road, rail, marine, and aviation for passenger and freight transportation. The road segment is subdivided into passenger LDV, passenger 2W/3W, passenger bus, freight MDV, and freight HDV. The other transportation modes are comprised of demand for freight and passengers. The demand is estimated in passenger kilometres (p-km) for passenger transportation and in (metric) tonne kilometres (t-km) for freight transportation. Further information and data for transportation demand along with fuel shares and specific energy demand are provided in Khalili et al.⁵.

The transportation demand is converted into energy demand by assuming an energy transition from current fuels to fully sustainable fuels by 2050, whereas the following principal fuel types are taken into account and visualised in Figure A3:

- Road: electricity, hydrogen, liquid fuels;
- Rail: electricity, liquid fuels;
- Marine: electricity, hydrogen, methane, liquid fuels, ammonia, methanol;
- Aviation: electricity, hydrogen, liquid fuels.

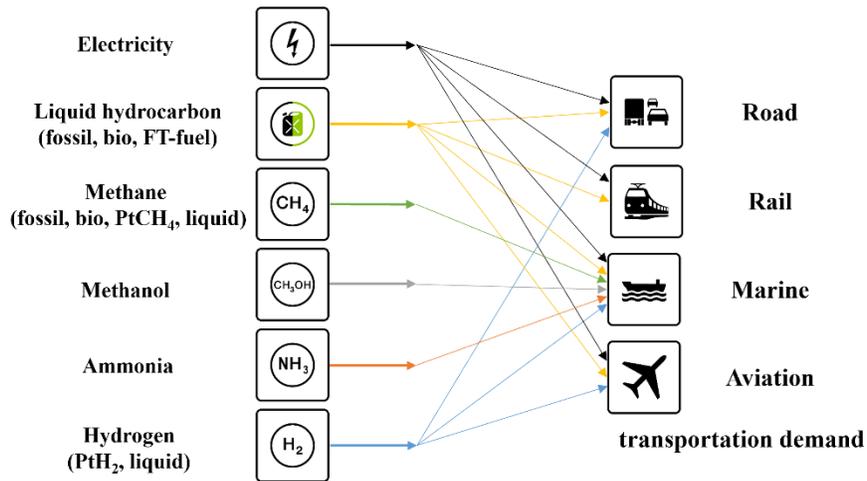


Figure A3: Schematic of the transport modes and corresponding fuels utilised during the energy transition from 2015-2050.

The fuel conversion process adopted to produce sustainable e-fuels is shown in Figure A4.

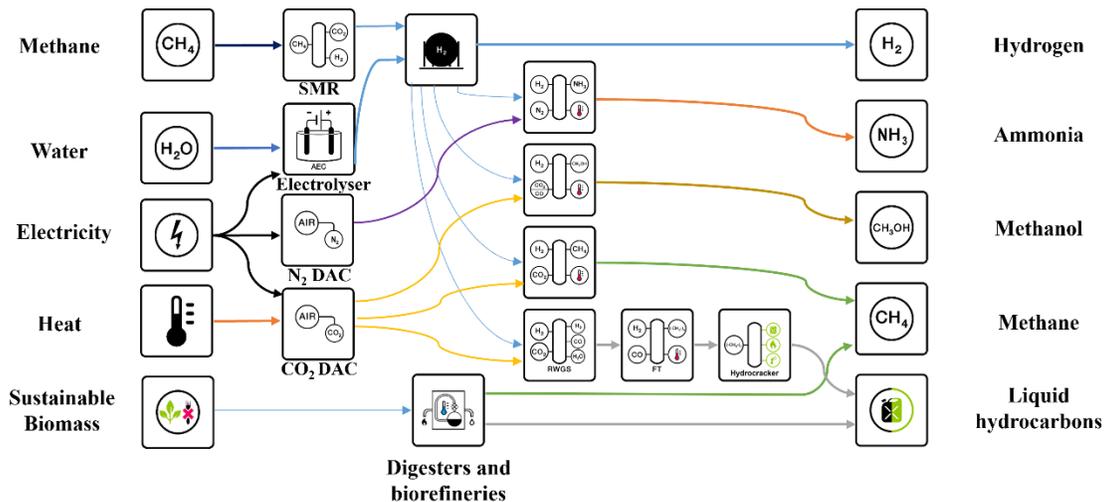


Figure A4: Schematic of the value chain elements in the production of sustainable e-fuels.

The fuel shares of the transportation modes in the road segment are based directly or indirectly on levelised cost of mobility (LCOM) considerations for newly sold vehicles, which change the stock of vehicles according to the lifetime composition of the existing stock. Vehicle stock and overall demand data are then linked to specific energy demand values to calculate demand of fuels and electricity for the transport sector. A more detailed description of the methods is provided in Khalili et al.⁵.

Industrial processes describe the energy and raw materials demand for cement, steel, chemicals, aluminium, pulp and paper and desalination. Considered technologies include conventional and improved technology for cement production; conventional (coal-based blast furnace), hydrogen-based direct reduced iron (H-DRI) with electric arc furnace (EAF) and electrowinning of iron (EWIN), steel scrap recycling using EAF for secondary steel production; ammonia, methanol and naphtha production for the chemical industry; alumina and aluminium production, aluminium recycling for secondary aluminium production; pulp and paper mills for paper production. Other industry is considered to be supplied with industrial process heat, mainly based on conventional fuels in the initial periods of the transition, which shifts towards high shares

of direct electric heat supply, some bioenergy, and hydrogen-based heat supply in the later periods. The industry sector and its integration into the energy system is described in Bogdanov et al.³.

The energy transition simulation considers the existing AC power grid of the region, its development trends and projected overall electricity transmission and distribution losses according to Sadovskaia et al.⁶.

Data preparation

This includes determining long-term energy demand across the different sectors of power, heat, transport and industry. In addition, it involves generating hourly demand profiles across all energy sectors, but also creating a database of power plants across the EU. Additionally, assessing the resource potentials of various renewable energy technologies across the different regions of the EU is a vital input. Furthermore, technical and financial details including assumptions, for all technologies are collated. All relevant data are organised across the 20 regions through the transition period from 2020 to 2050, in five-year intervals.

- Development of energy demand

The development of the energy demand across the sectors of power, heat, transport and industry are estimated for the different energy transition scenarios across the EU. The increasing demand for electrification of other sectors such as heat, transport and industry has been factored in the energy and feedstock demand. The growth in electricity demand of the power sector in the EU is estimated to represent an average compound annual growth rate of 0.9% in the energy transition period. Moreover, the demand profiles on an hourly basis for the integrated energy sector based on regional variation were computed through the transition from 2020 to 2050, in five-year intervals. The synthetic electricity demand profiles from 2020 until 2050 are generated based on the methodology from Toktarova et al.⁷. Profiles for space and water heating demand are taken from Keiner et al.⁸. Transportation demand for the different transport modes is taken from Khalili et al.⁵. Industrial feedstock and energy demand is calculated based on various sources: cement production⁹, steel production^{10,11}, chemical feedstock demand¹², alumina production¹³, aluminium production¹³, pulp and paper production^{14,15}. Other industries non-energetic feedstock flows are not modelled, while the power and heat demand are estimated based on national and European statistics¹⁶ as a difference between total power and heat demand and the energy demand of industry segments which are traced in detail. Power, heat, transport, and industry demand across the regions and countries of the EU for each step of the transition are provided in the Supplementary Data.

- Resource potential for renewable energy technologies

The generation profiles for optimally fixed-tilted PV, solar CSP and wind energy are calculated according to Bogdanov and Breyer¹⁷ and for single-axis tracking PV according to Afanasyeva et al.¹⁸. The hydropower feed-in profiles are computed based on daily resolved water flow data for the year 2005¹⁹. The potentials for biomass and waste resources were obtained from Bunzel et al.²⁰ and further classified into categories of solid wastes, solid residues and biogas. Geothermal energy potential is estimated according to the method described in Aghahosseini and Breyer²¹. The distribution across the EU of full load hours (equivalent to annual generation) of solar PV, for the case of fixed-tilted and single axis, and wind onshore and offshore at 150 m hub height, which are the two most vital sources of electricity in the energy transition, are shown in Figure A5 and A6. It can be observed that regions in southern parts of the EU have a great potential for solar energy all year round (see Figure A5), while regions in the northern and western parts of the EU have exceptional wind energy potential, both onshore and offshore (see Figure A6).

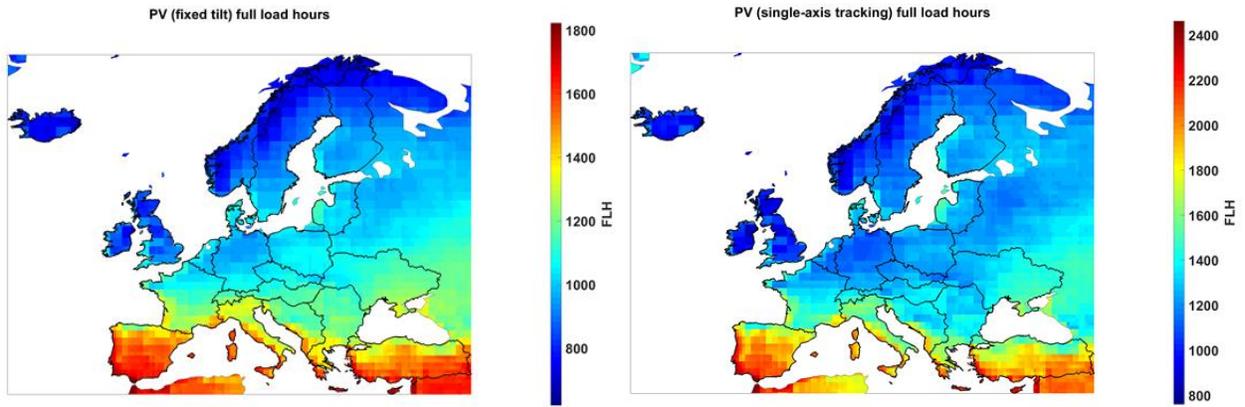


Figure A5: Annual full load hours for solar PV fixed-tilted (left) and single-axis tracking across the EU.

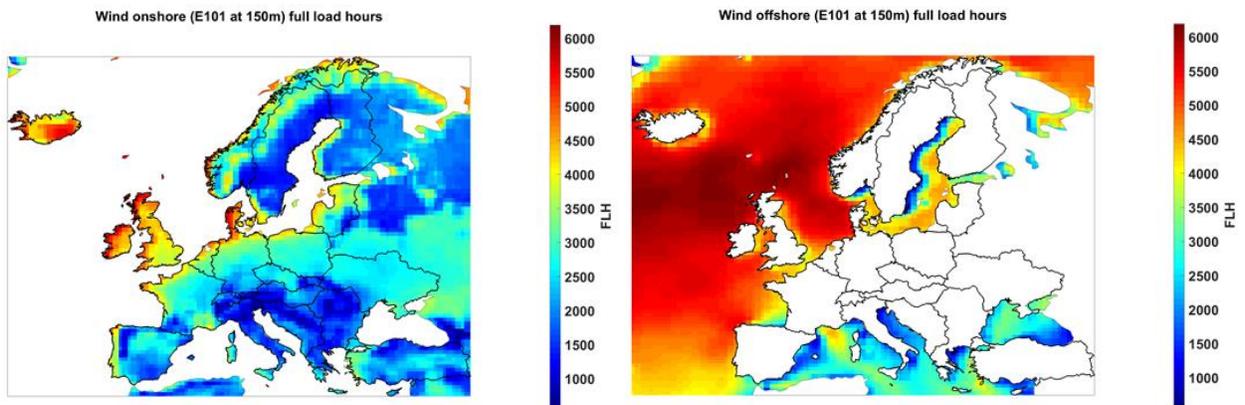


Figure A6: Annual full load hours for onshore (left) and offshore (right) wind power across the EU.

Technologies		Unit	2020	2025	2030	2035	2040	2045	2050	Sources
	Opex var	€/kWh _{el}	0.002	0.002	0.002	0.002	0.002	0.002	0.002	
	Lifetime	years	35	35	35	35	35	35	35	
OCGT PP	Capex	€/kW _{el}	475	475	475	475	475	475	475	[33]
	Opex fix	€/(kW _{el} a)	14.25	14.25	14.25	14.25	14.25	14.25	14.25	
	Opex var	€/kWh _{el}	0.011	0.011	0.011	0.011	0.011	0.011	0.011	
	Lifetime	years	35	35	35	35	35	35	35	
CCGT PP + CCS	Capex	€/kW _{el}	2565	2272.5	1980	1845	1710	1640	1570	[34]
	Opex fix	€/(kW _{el} a)	81	72	63	58.5	54	52	50	
	Opex var	€/kWh _{el}	0	0	0	0	0	0	0	
	Lifetime	years	35	35	35	35	35	35	35	
Int Combust Generator	Capex	€/kW _{el}	385	385	385	385	385	385	385	[33]
	Opex fix	€/(kW _{el} a)	11.5	11.5	11.5	11.5	11.5	11.5	11.5	
	Opex var	€/kWh _{el}	0.0047	0.0047	0.0047	0.0047	0.0047	0.0047	0.0047	
	Lifetime	years	30	30	30	30	30	30	30	
Multifuel Int Combust Generator	Capex	€/kW _{el}	569	553	537	522	506	491	475	[29]
	Opex fix	€/(kW _{el} a)	6.2	6.2	6.2	6.2	6.2	6.2	6.2	
	Opex var	€/kWh _{el}	0.011	0.011	0.011	0.011	0.011	0.011	0.011	
	Lifetime	years	30	30	30	30	30	30	30	
Coal PP	Capex	€/kW _{el}	1600	1600	1600	1600	1600	1600	1600	[32,35]
	Opex fix	€/(kW _{el} a)	20	20	20	20	20	20	20	
	Opex var	€/kWh _{el}	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	Lifetime	years	45	45	45	45	45	45	45	
Biomass PP	Capex	€/kW _{el}	2620	2475	2330	2195	2060	1945	1830	[31]
	Opex fix	€/(kW _{el} a)	47.2	44.6	41.9	39.5	37.1	35	32.9	
	Opex var	€/kWh _{el}	0.0038	0.0038	0.0038	0.0038	0.0038	0.0038	0.0038	
	Lifetime	years	25	25	25	25	25	25	25	
Nuclear PP	Capex	€/kW _{el}	6003	6003	5658	5658	5244	5244	5175	[32,36,37]
	Opex fix	€/(kW _{el} a)	113.1	113.1	98.4	98.4	83.6	83.6	78.8	
	Opex var	€/kWh _{el}	0.0025	0.0025	0.0025	0.0025	0.0025	0.0025	0.0025	
	Lifetime	years	40	40	40	40	40	40	40	
CHP NG Heating	Capex	€/kW _{el}	880	880	880	880	880	880	880	[31]
	Opex fix	€/(kW _{el} a)	74.8	74.8	74.8	74.8	74.8	74.8	74.8	
	Opex var	€/kWh _{el}	0.0024	0.0024	0.0024	0.0024	0.0024	0.0024	0.0024	
	Lifetime	years	30	30	30	30	30	30	30	
CHP Oil Heating	Capex	€/kW _{el}	880	880	880	880	880	880	880	[31]
	Opex fix	€/(kW _{el} a)	74.8	74.8	74.8	74.8	74.8	74.8	74.8	
	Opex var	€/kWh _{el}	0.0024	0.0024	0.0024	0.0024	0.0024	0.0024	0.0024	
	Lifetime	years	30	30	30	30	30	30	30	
CHP Coal Heating	Capex	€/kW _{el}	2030	2030	2030	2030	2030	2030	2030	[31]
	Opex fix	€/(kW _{el} a)	46.7	46.7	46.7	46.7	46.7	46.7	46.7	
	Opex var	€/kWh _{el}	0.0051	0.0051	0.0051	0.0051	0.0051	0.0051	0.0051	
	Lifetime	years	40	40	40	40	40	40	40	
CHP Biomass Heating	Capex	€/kW _{el}	3400	3300	3200	3125	3050	2975	2900	[31]
	Opex fix	€/(kW _{el} a)	97.6	94.95	92.3	90.8	89.3	87.8	86.3	
	Opex var	€/kWh _{el}	0.0038	0.0038	0.0037	0.0037	0.0038	0.0038	0.0038	
	Lifetime	years	25	25	25	25	25	25	25	
CHP Biogas	Capex	€/kW _{el}	429.2	399.6	370	340.4	325.6	310.8	296	[31]
	Opex fix	€/(kW _{el} a)	17.168	15.984	14.8	13.616	13.024	12.432	11.84	
	Opex var	€/kWh _{el}	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	Lifetime	years	30	30	30	30	30	30	30	
MSW incinerator	Capex	€/kW _{el}	5630	5440	5240	5030	4870	4690	4540	[31]
	Opex fix	€/(kW _{el} a)	253.35	244.8	235.8	226.35	219.15	211.05	204.3	
	Opex var	€/kWh _{el}	0.0069	0.0069	0.0069	0.0069	0.0069	0.0069	0.0069	
	Lifetime	years	30	30	30	30	30	30	30	

Technologies		Unit	2020	2025	2030	2035	2040	2045	2050	Sources
Concentrating Solar Heat	Capex	€/kW _{th}	344.5	303.6	274.7	251.1	230.2	211.9	196	[^{38,39}]
	Opex fix	€/(kW _{th a})	7.9	7	6.3	5.8	5.3	4.9	4.5	
	Opex var	€/kWh _{th}	0	0	0	0	0	0	0	
	Lifetime	years	25	25	25	25	25	25	25	
Residential Solar Heat - Collectors - Space Heating	Capex	€/kW _{th}	1214	1179	1143	1071	1000	929	857	[³¹]
	Opex fix	€/(kW _{th a})	14.8	14.8	14.8	14.8	14.8	14.8	14.8	
	Opex var	€/kWh _{th}	0	0	0	0	0	0	0	
	Lifetime	years	25	25	30	30	30	30	30	
DH Electric Heating	Capex	€/kW _{th}	100	100	75	75	75	75	75	[³¹]
	Opex fix	€/(kW _{th a})	1.47	1.47	1.47	1.47	1.47	1.47	1.47	
	Opex var	€/kWh _{th}	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	0.0005	
	Lifetime	years	35	35	35	35	35	35	35	
DH Heat Pump	Capex	€/kW _{th}	660	618	590	568	554	540	530	[³¹]
	Opex fix	€/(kW _{th a})	2	2	2	2	2	2	2	
	Opex var	€/kWh _{th}	0.0018	0.0017	0.0017	0.0016	0.0016	0.0016	0.0016	
	Lifetime	years	25	25	25	25	25	25	25	
DH NG Heating	Capex	€/kW _{th}	75	75	100	100	100	100	100	[³¹]
	Opex fix	€/(kW _{th a})	2.775	2.775	3.7	3.7	3.7	3.7	3.7	
	Opex var	€/kWh _{th}	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002	
	Lifetime	years	35	35	35	35	35	35	35	
DH Oil Heating	Capex	€/kW _{th}	75	75	100	100	100	100	100	[³¹]
	Opex fix	€/(kW _{th a})	2.775	2.775	3.7	3.7	3.7	3.7	3.7	
	Opex var	€/kWh _{th}	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002	
	Lifetime	years	35	35	35	35	35	35	35	
DH Coal Heating	Capex	€/kW _{th}	75	75	100	100	100	100	100	[³¹]
	Opex fix	€/(kW _{th a})	2.775	2.775	3.7	3.7	3.7	3.7	3.7	
	Opex var	€/kWh _{th}	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002	
	Lifetime	years	35	35	35	35	35	35	35	
DH Biomass Heating	Capex	€/kW _{th}	75	75	100	100	100	100	100	[³¹]
	Opex fix	€/(kW _{th a})	2.8	2.8	3.7	3.7	3.7	3.7	3.7	
	Opex var	€/kWh _{th}	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002	0.0002	
	Lifetime	years	35	35	35	35	35	35	35	
DH Geothermal Heat	Capex	€/kW _{th}	3642	3384	3200	3180	3160	3150	3146	[³¹]
	Opex fix	€/(kW _{th a})	133	124	117	116	115	115	115	
	Opex var	€/kWh _{th}	0	0	0	0	0	0	0	
	Lifetime	years	22	22	22	22	22	22	22	
Local Electric Heating	Capex	€/kW _{th}	100	100	100	100	100	100	100	[³¹]
	Opex fix	€/(kW _{th a})	2	2	2	2	2	2	2	
	Opex var	€/kWh _{th}	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	Lifetime	years	30	30	30	30	30	30	30	
Local Heat Pump	Capex	€/kW _{th}	780	750	730	706	690	666	650	[³¹]
	Opex fix	€/(kW _{th a})	15.6	15	7.3	7.1	6.9	6.7	6.5	
	Opex var	€/kWh _{th}	0	0	0	0	0	0	0	
	Lifetime	years	20	20	20	20	20	20	20	
Local NG Heating	Capex	€/kW _{th}	800	800	800	800	800	800	800	[³¹]
	Opex fix	€/(kW _{th a})	27	27	27	27	27	27	27	
	Opex var	€/kWh _{th}	0	0	0	0	0	0	0	
	Lifetime	years	22	22	22	22	22	22	22	
Local Oil Heating	Capex	€/kW _{th}	440	440	440	440	440	440	440	[³¹]
	Opex fix	€/(kW _{th a})	18	18	18	18	18	18	18	
	Opex var	€/kWh _{th}	0	0	0	0	0	0	0	
	Lifetime	years	20	20	20	20	20	20	20	
Local Biomass Heating	Capex	€/kW _{th}	675	675	750	750	750	750	750	[³¹]
	Opex fix	€/(kW _{th a})	2	2	3	3	3	3	3	

Technologies		Unit	2020	2025	2030	2035	2040	2045	2050	Sources
	Opex var	€/kWh _{el}	0	0	0	0	0	0	0	
	Lifetime	years	40	40	40	40	40	40	40	
Hot Heat Storage	Capex	€/kWh _{th}	41.8	32.7	26.8	23.3	21	19.3	17.5	[³¹]
	Opex fix	€/(kWh _{th a})	0.63	0.49	0.4	0.35	0.32	0.29	0.26	
	Opex var	€/kWh _{th}	0	0	0	0	0	0	0	
	Efficiency	%	90%	90%	90%	90%	90%	90%	90%	
	Lifetime	years	25	25	25	30	30	30	30	
Hot Heat Storage Interface	Capex	€/kW _{th}	0	0	0	0	0	0	0	[³¹]
	Opex fix	€/(kW _{th a})	0	0	0	0	0	0	0	
	Opex var	€/kW _{th}	0	0	0	0	0	0	0	
	Lifetime	years	25	25	25	30	30	30	30	
Hydrogen Storage	Capex	€/kWh _{th}	0.28	0.28	0.28	0.28	0.28	0.28	0.28	[⁵⁰]
	Opex fix	€/(kWh _{th a})	0.0112	0.0112	0.0112	0.0112	0.0112	0.0112	0.0112	
	Opex var	€/kWh _{th}	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	
	Efficiency	%	100%	100%	100%	100%	100%	100%	100%	
	Lifetime	years	30	30	30	30	30	30	30	
Hydrogen Storage Interface	Capex	€/kW _{th}	100	100	100	100	100	100	100	[⁵⁰]
	Opex fix	€/(kW _{th a})	4	4	4	4	4	4	4	
	Opex var	€/kW _{th}	0	0	0	0	0	0	0	
	Lifetime	years	15	15	15	15	15	15	15	
CO ₂ Storage	Capex	€/ton	142	142	142	142	142	142	142	[⁵¹]
	Opex fix	€/(ton a)	9.94	9.94	9.94	9.94	9.94	9.94	9.94	
	Opex var	€/ton	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	0.0001	
	Lifetime	years	30	30	30	30	30	30	30	
CO ₂ Storage Interface	Capex	€/ton/h	0	0	0	0	0	0	0	[⁵¹]
	Opex fix	€/(ton/h a)	0	0	0	0	0	0	0	
	Opex var	€/ton	0	0	0	0	0	0	0	
	Lifetime	years	50	50	50	50	50	50	50	
Gas Storage	Capex	€/kWh _{th}	0.05	0.05	0.05	0.05	0.05	0.05	0.05	[⁵²]
	Opex fix	€/(kWh _{th a})	0.001	0.001	0.001	0.001	0.001	0.001	0.001	
	Opex var	€/kWh _{th}	0	0	0	0	0	0	0	
	Efficiency	%	100%	100%	100%	100%	100%	100%	100%	
	Lifetime	years	50	50	50	50	50	50	50	
Gas Storage Interface	Capex	€/kW _{th}	100	100	100	100	100	100	100	[⁵²]
	Opex fix	€/(kW _{th a})	4	4	4	4	4	4	4	
	Opex var	€/kW _{th}	0	0	0	0	0	0	0	
	Lifetime	years	15	15	15	15	15	15	15	
District Heat Storage	Capex	€/kWh _{th}	40	30	30	25	20	20	20	[³¹]
	Opex fix	€/(kWh _{th a})	0.6	0.45	0.45	0.375	0.3	0.3	0.3	
	Opex var	€/kWh _{th}	0	0	0	0	0	0	0	
	Efficiency	%	90%	90%	90%	90%	90%	90%	90%	
	Lifetime	years	25	25	25	30	30	30	30	
District Heat Storage Interface	Capex	€/kW _{th}	0	0	0	0	0	0	0	[³¹]
	Opex fix	€/(kW _{th a})	0	0	0	0	0	0	0	
	Opex var	€/kW _{th}	0	0	0	0	0	0	0	
	Lifetime	years	25	25	25	30	30	30	30	

Table B2: Self-discharge rates of storage technologies^{2,3}.

Technology	Self-Discharge [%/h]
Battery	0
PHES	0

A-CAES	0.1
TES	0.2
Gas storage	0

Table B3: Fossil and nuclear fuel prices through the transition.

Name of component	Unit	2020	2025	2030	2035	2040	2045	2050	References
Coal	€/MWh _{th}	5.4	5.9	6.3	6.2	6.1	6.0	5.9	[⁵³]
Crude oil	€/MWh _{th}	21.7	25.4	29.0	28.3	27.5	26.7	25.9	[⁵³]
Fossil gas	€/MWh _{th}	12.6	17.9	23.1	23.6	24.0	24.5	24.9	[⁵³]
Uranium	€/MWh _{th}	2.6	2.6	2.6	2.6	2.6	2.6	2.6	[³⁶]

Table B4: Costs of CO₂ emissions.

Scenario	Unit	2020	2025	2030	2035	2040	2045	2050	References
RES-2035	€/tCO ₂	50	107	164	220	220	220	220	[⁵³]
RES-2040	€/tCO ₂	50	93	135	178	220	220	220	[⁵³]
REF	€/tCO ₂	50	82	114	147	180	200	220	[⁵³]

Table B5: Efficiencies of HVDC transmission for the reference year – 2030⁶.

Component	Power losses
HVAC line	9.4 % / 1000 km
HVDC line	1.6 % / 1000 km
HVDC converter pair	1.4%

C. Results

The detailed results for each of the three scenarios are presented in the following sections:

C1. REF Scenario

Energy Demand

In the REF scenario, the uptake of renewables is relatively slower as compared to the other two scenarios, which also influences the change in resource efficiency through electrification. Efficiency measures such as improving building renovation rates, modal shift of transport towards electrified rail use and more conscious use of energy enable further gains in final and, consequently, primary energy. This eventually determines the levels of primary energy demand as shown in Figure C1.1.

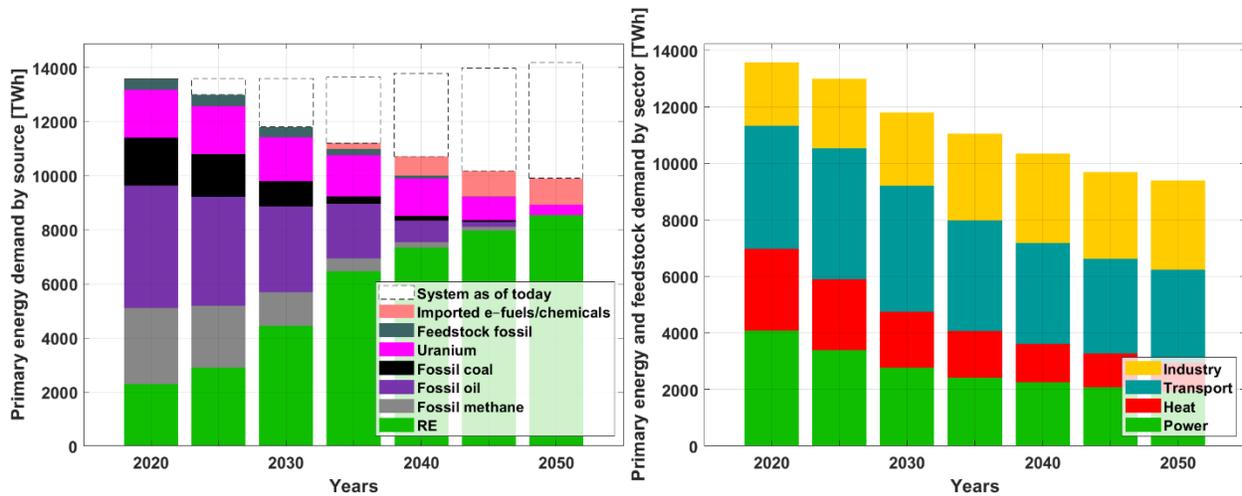


Figure C1.1: Primary energy demand according to sources (left) and on a sectoral basis (right), during the energy transition from 2020 to 2050 across the EU (REF).

The primary energy demand decreases from over 13,500 TWh in 2020 to around 9,500 TWh by 2050 across the EU as shown in Figure C1.1. The gain in efficiencies compared to the 'system as of today' is due to electrification of the heat, transport and industry sectors, while the growth in demand for energy services continues. The final energy declines from about 11,000 TWh in 2020 to around 10,000 TWh in 2050, despite a high level of energy services, as shown in Figure C1.2. The different fuels that constitute the final energy demand¹ transition from mostly fossil fuels in 2020 to renewable electricity, heat, e-fuels and e-chemicals by 2050.

¹ Including the ambient heat for heat pumps

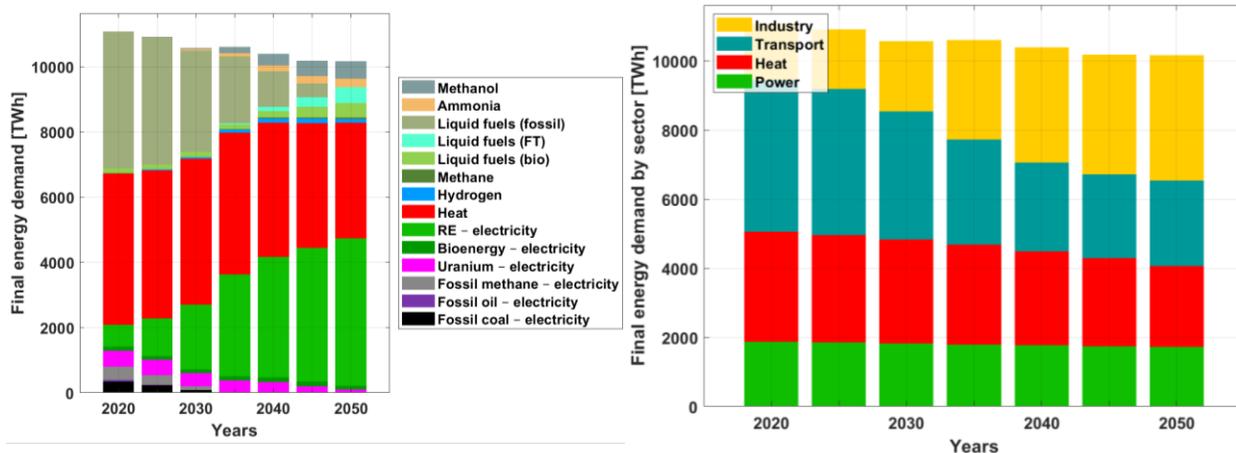


Figure C1.2: Final energy demand¹ according to sources (left) and on a sectoral basis (right), during the energy transition from 2020 to 2050 across the EU (REF).

Sectoral Outlook

Energy supply is mainly through electricity and heat, as high levels of electrification are achieved through the transition. An increasing amount of electricity generation is needed along with heat, storage and supply of fuels and chemicals to cover the future energy demand.

Electricity

The electricity generation capacity across the EU satisfies demand from all energy sectors including power, heat, transport and industry. The total installed capacity grows massively from about 750 GW in 2020 to nearly 4000 GW by 2050 as shown in Figure C1.3. In the initial period of the transition, a larger share of wind power capacities is installed up to 2030, but in the later part of the transition solar PV dominates the shares of installed capacities reaching almost 3000 GW by 2050. On the other hand, the shares of fossil fuels and nuclear power decline through the transition, with some shares in 2050, while the absolute contribution of nuclear energy remain only due to operational status of nuclear power plants until end of technical lifetimes.

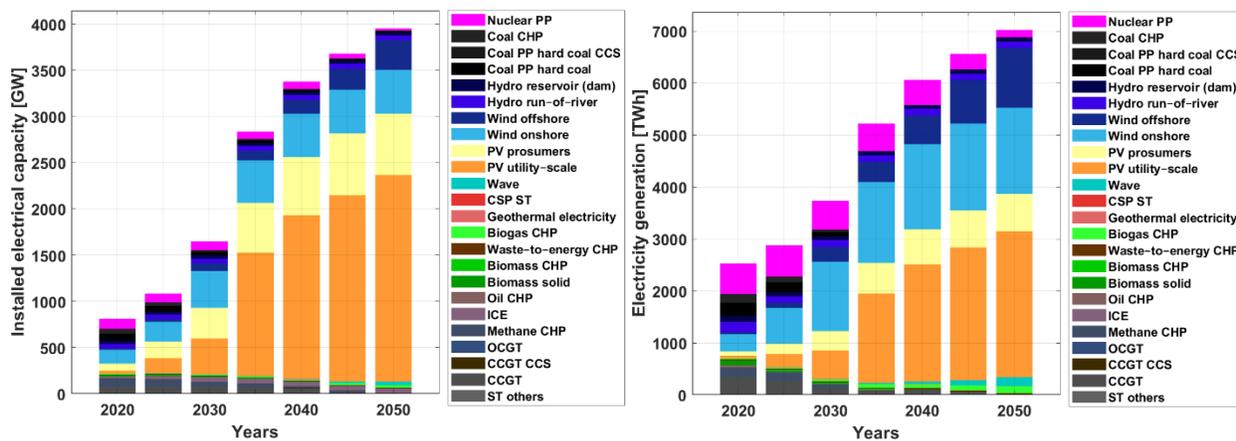


Figure C1.3: Technology-wise installed capacities (left) and technology-wise electricity generation (right) during the energy transition from 2020 to 2050 across the EU (REF).

¹ Including the ambient heat for heat pumps

Electricity generation from the various technologies to cover the demand of power, heat, transport and industry sectors is shown in Figure C1.3. Solar PV supply increases through the transition along with wind power, wave power and electricity from waste and residual biomass up to 2050. Nuclear power has some minor shares, as plants remain in the system until end of technical lifetimes.

Heat

In the heat sector, heat pumps, electric heating, and biomass-based heating constitute the majority of installed capacity by 2050, also shown in Figure C1.4. A decrease in total installed capacity of heating technologies occurs mainly due to efficiency gains with heat pumps and electric heating, as fossil fuels recede from the energy system. The key driver is the doubling of building renovation rates and linear increase of industrial heat efficiency to 1.5% per annum until 2030. Heat pumps play a significant role through the transition with a share of over 50% of heat generation by 2050 on both the district and individual levels, as indicated in Figure C1.4. On the other hand, fossil gas-based heating decreases through the transition from over 75% in 2020, to almost zero by 2050. Moreover, fossil fuels based heat generation declines through the transition period as coal-based combined heat and power (CHP) and district heating (DH) are replaced by heat generation from heat pumps, waste-to-energy CHP, biomass-based DH, and individual heating (IH).

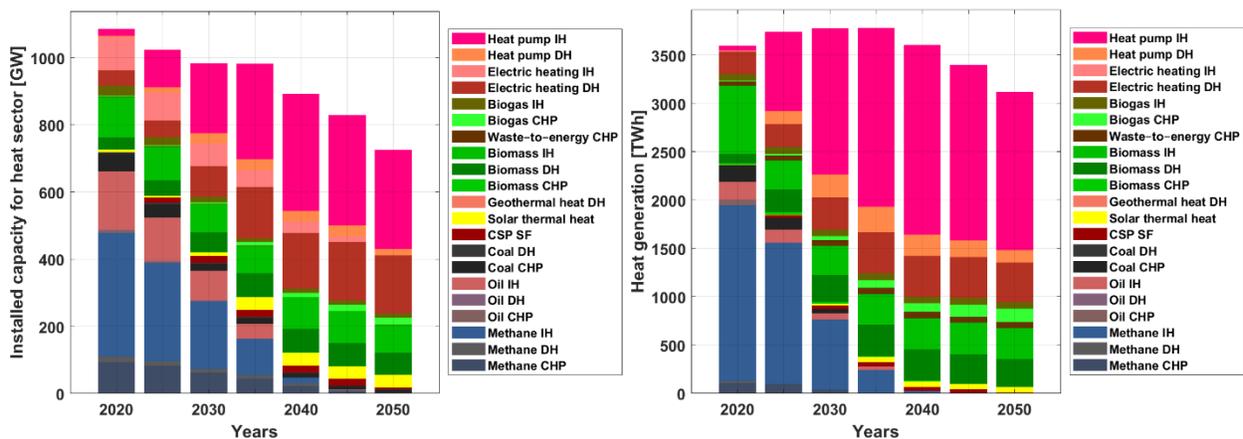


Figure C1.4: Technology-wise heat generation capacities (left) and technology-wise heat generation (right) during the energy transition from 2025 to 2050 across the EU (REF).

Electricity, Heat and Gas Storage

Energy storage technologies play a critical role in enabling a secure energy supply across the EU, fully based on renewable energy across different sectors. The installed electricity storage capacity increases from just 0.4 TWh in 2020 to around 5.5 TWh by 2050, as shown in Figure C1.5. Utility-scale and prosumer batteries with major shares of vehicle-to-grid dominate, some PHES remains through the transition. Utility-scale and prosumer batteries contribute a major share of the electricity storage output with hydrogen and methane based output contributing beyond 2035, as highlighted by Figure C1.5. In addition, vehicle-to-grid, PHES contributes some shares through the transition.

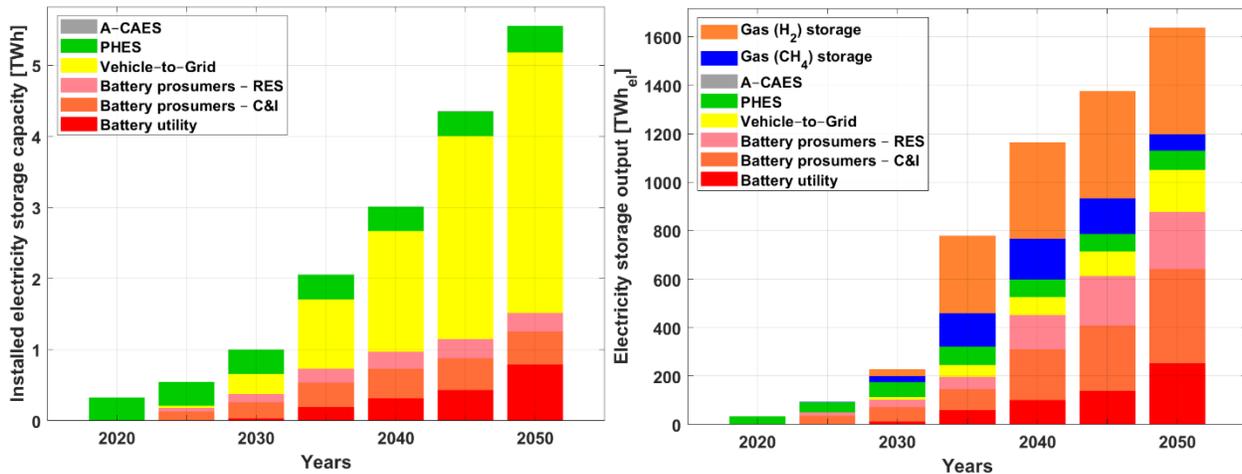


Figure C1.5: Installed electricity storage capacities (left) and electricity storage output (right) during the energy transition from 2020 to 2050 across the EU (REF).

Heat storage plays a vital role in ensuring that the heat demand is covered in all sectors. The installed heat storage grows substantially from 2030 onwards, installed capacities are dominated by gas storage (hydrogen and methane), as shown in Figure C1.6. This substantial capacity addition is mainly to provide seasonal storage across the EU covering the heat demand in the absence of fossil fuels. The present fossil gas storage capacity across the EU is around 1000 TWh⁵⁴, hence an even lesser amount of gas storage would be needed for an integrated energy system in the future. Thermal energy storage emerges with heat storage output from 2030 until 2050, as shown in Figure C1.6. Hydrogen gas storage contributes a majority of the heat storage output from 2035 to 2050 with some shares of biomethane, covering predominantly the seasonal demand, which is covered by fossil gas before 2030.

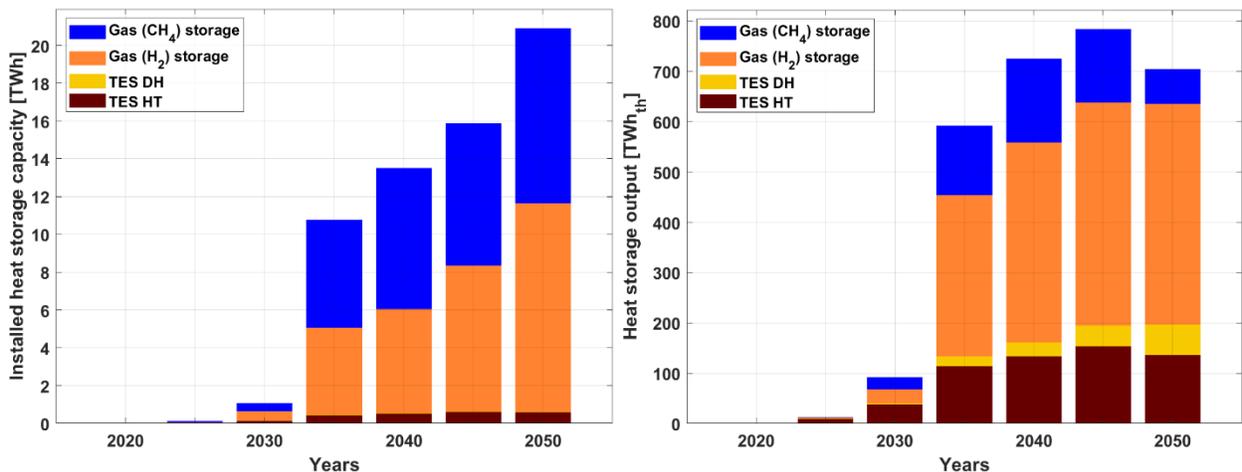


Figure C1.6: Heat storage installed capacities (left) and heat storage output (right) during the energy transition from 2020 to 2050 across the EU (REF).

Transport and Industry

The final energy demand of the transport sector across the EU is almost twice the energy demand from the power sector at around 4400 TWh in 2020. However, this demand declines through the transition to around 2000 TWh by 2050, as shown in Figure C1.7. This is achieved mainly due to efficiency gains brought about by electrification of the sector, mainly road transport. On the other hand, the energy and feedstock demand

for the industry sector grows through the transition driven by production of sustainable chemicals and fuels, as shown in Figure C1.7.

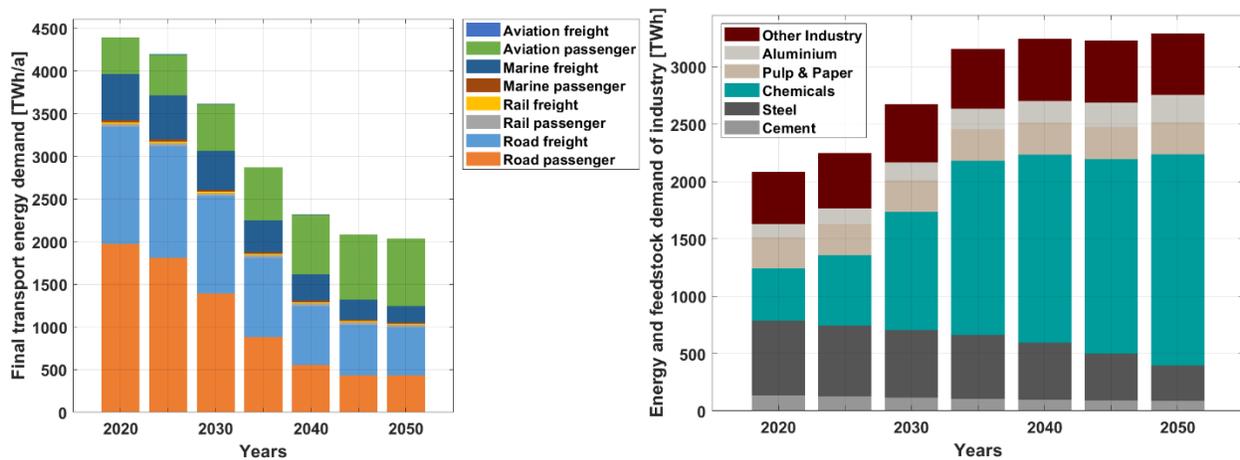


Figure C1.7: Final energy demand for transport (left) and energy and feedstock demand for various industries¹ (right) during the energy transition from 2020 to 2050 across the EU (REF).

The road transport energy demand declines through the transition with massive gains from high levels of direct electrification, whereas the final energy demand increases for aviation in the last few years, not only due to a continuous transportation demand, but also driven by increasing specific energy demand due to production of synthetic e-fuels. Energy demand for the rail mode remains fairly stable through the transition, as it already at a high level of electrification across the EU. The development of the final energy demand for the different transport modes through the transition is shown in Figure C1.7. The low efficiency of the present transport sector is highlighted by the projection of an about 80% increase in transportation demand, but stabilised final energy demand for the transport sector.

Electrification of Heat, Transport and Industry Sectors

The heat, transport and industry sectors undergo a significant transformation in the course of the energy transition, as high levels of electrification (direct and indirect) lead to higher demand for electricity and a rapid decline in demand for fossil fuels.

The share of electricity in the final energy demand² for heat increases substantially with about 2300 TWh by 2050, while the share of fossil fuels in the final energy demand declines to zero from nearly 2400 TWh in 2020, as shown in Figure C1.8.

¹ Including the ambient heat for heat pumps

² Including the ambient heat for heat pumps

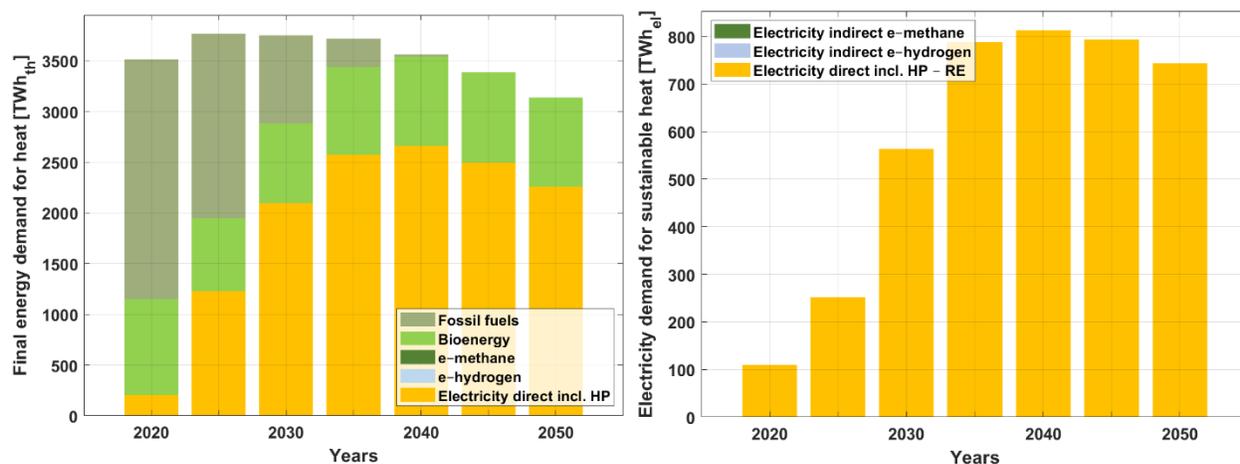


Figure C1.8: Final energy demand for heat¹ (left) and electricity demand for sustainable heat (right) during the energy transition from 2020 to 2050 across the EU (REF).

Electricity demand to provide sustainable heat increases through the transition to around 720 TWh_{el} by 2050.

Fossil fuels consumption in the transport sector across the EU is seen to decline through the transition from about 95% in 2020 to zero by 2050. On the other hand, liquid fuels produced by renewable electricity contribute around 30% of final energy demand in 2050. In addition, hydrogen constitutes around 10% of final energy demand along with some shares of e-methanol and e-ammonia in 2050, as shown in Figure C1.9. Sustainable biofuels from waste and residual biomass contribute some shares as part of renewable liquid fuels. Electrification of the transport sector creates an electricity demand of about 2200 TWh_{el} by 2050. In the initial periods demand is driven by direct electrification of road transport, while indirect electrification of marine and aviation drives the demand from 2035 onwards. The massive production of e-fuels, most importantly FT-fuels, e-methanol, e-ammonia, and e-hydrogen, kicks in from 2035 onwards until 2050, as indicated in Figure C1.9.

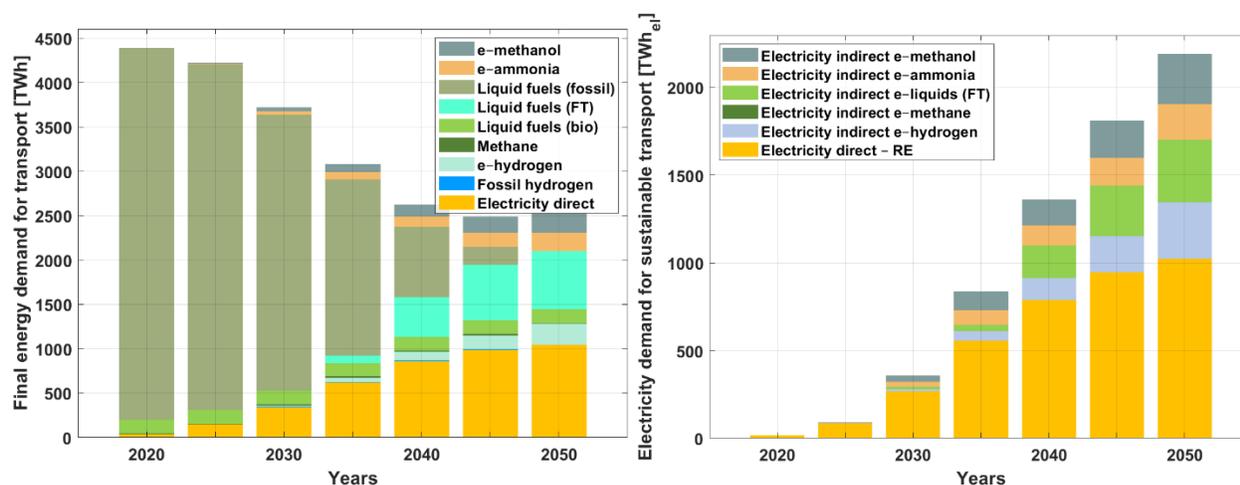


Figure C1.9: Final energy demand for transport (left) and electricity demand for sustainable transport (right) during the energy transition from 2020 to 2050 across the EU (REF).

¹ Including the ambient heat for heat pumps

As renewable electricity use in the industry sector grows, fossil fuels are replaced by green e-hydrogen and other e-fuels and e-chemicals until 2050, as shown in Figure C1.10. Electrification of the industry sector creates an electricity demand of about 2000 TWh_{el} by 2050. The massive demand for green e-hydrogen kicks in from 2030 onwards up until 2050, mainly for the production of sustainable e-chemicals, as indicated in Figure C1.10.

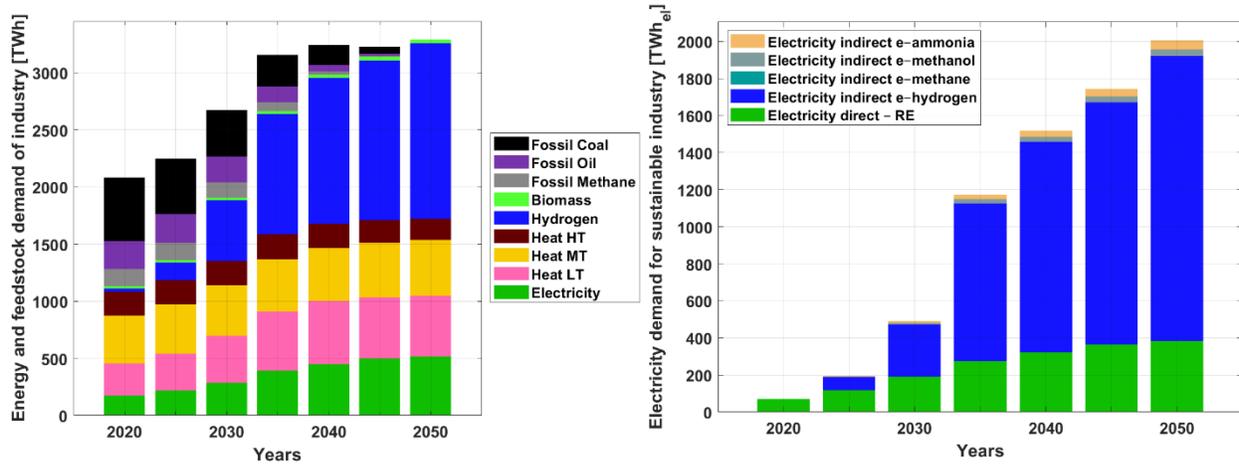


Figure C1.10: Energy and feedstock demand for industry¹ (left) and electricity demand for sustainable industry (right) during the energy transition from 2020 to 2050 across the EU (REF).

Fuels, Chemicals and Carbon Supply

An essential aspect in the transition of the transport sector towards higher electrification completely based on high shares of renewable energy is the production of synthetic fuels and chemicals: e-hydrogen, e-methane, Fischer-Tropsch fuels, e-methanol and e-ammonia. As indicated in Figure C1.11, fossil fuels are completely replaced by a combination of sustainable fuels and chemicals by 2050. Additionally, CO₂ direct air capture, which is vital in the production of synthetic e-fuels, supplies up to nearly 290 MtCO₂ by 2050, as shown in Figure C1.12. Some CO₂ buffer storage, which stores CO₂ from DAC systems to be utilised in the production of e-fuels and e-chemicals, complements CO₂ supply in the energy system.

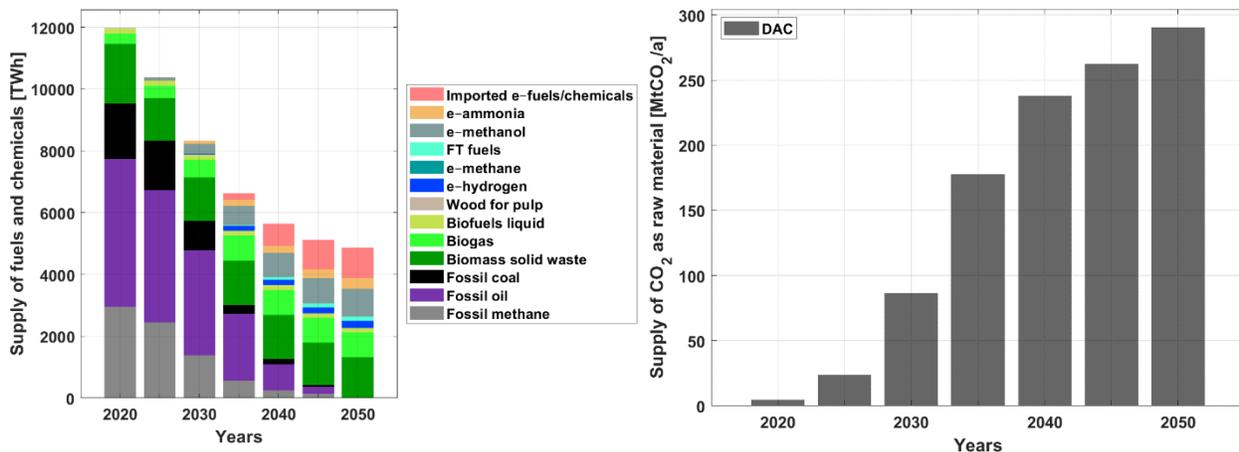


Figure C1.11: Supply of fuels and chemicals (left) and CO₂ as raw material (right) during the energy transition from 2020 to 2050 across the EU (REF).

¹ Including the ambient heat for heat pumps

Costs and Investments

The total annual costs decline from about 610 b€ in 2025 to about 450 b€ in 2050 through the transition period and are well distributed across the major sectors of power, heat, transport and industry across the EU. As indicated in Figure C1.12, Capex increases through the transition, as fuel costs decline. The steady increase in Capex-related energy system costs indicate that fuel imports and the respective negative impacts on trade balances will fade out through the transition. In addition, a low fuel import dependency will lead to a higher level of energy security across the EU.

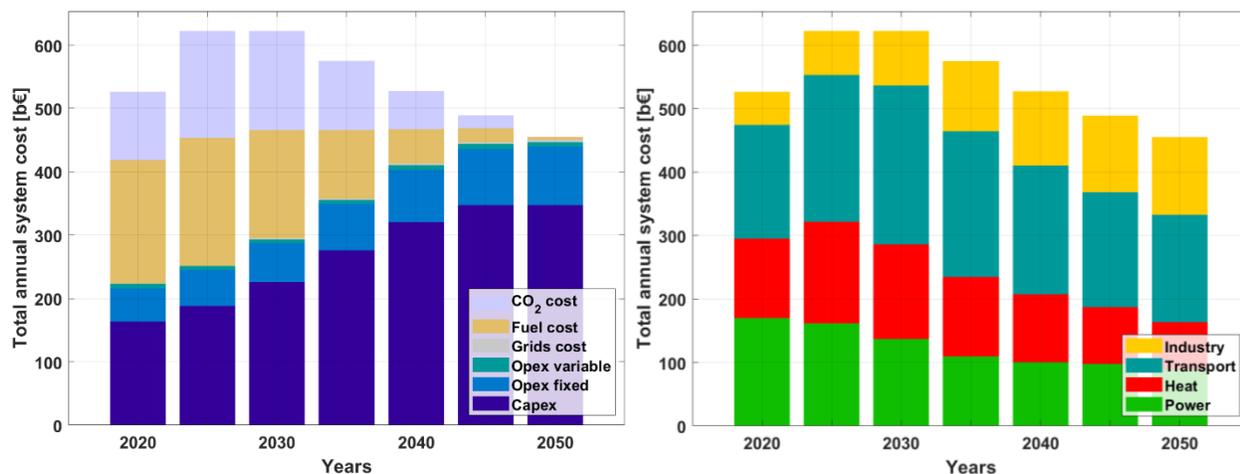


Figure C1.12: Annual energy system costs composed of different parameters (left) and of different sectors (right) during the energy transition from 2020 to 2050 across the EU (REF).

As increasing shares of power generation capacities are added globally, renewable energy sources on a levelised cost of energy basis become the lowest cost power generation source⁵⁵. As indicated in Figure C1.13, levelised cost of energy remains stable at around 50 €/MWh by 2050 and is increasingly dominated by capital costs as fuel costs continue to phase out through the transition period, which could mean increased self-reliance in terms of energy for the EU by 2050. Capital costs are well spread across a range of technologies with major investments for solar PV, wind power, batteries, heat pumps, and synthetic e-fuel and e-chemicals conversion technologies up to 2050, as shown in Figure C1.13.

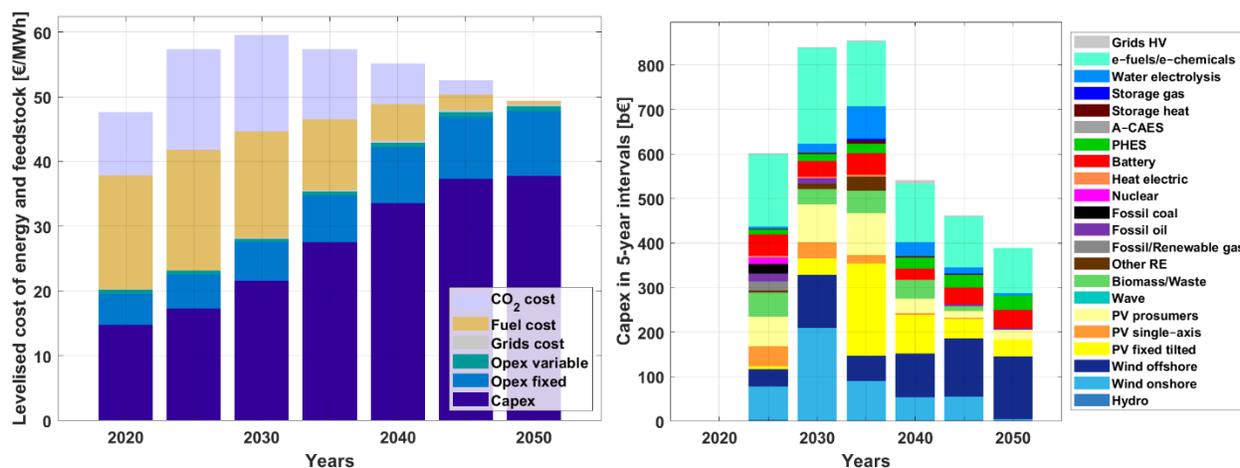


Figure C1.13: Levelised cost of energy (left) and capital expenditures in five-year intervals (right) during the energy transition from 2020 to 2050 across the EU (REF).

Capital expenditures are well spread across a range of power generation technologies with the majority share in wind power up to 2030, beyond which solar PV dominates investments up to 2050, as shown in Figure C1.14. The LCOE of the power sector decreases substantially from around 84 €/MWh in 2020 to around 42 €/MWh by 2050, as shown in Figure C1.14. LCOE is predominantly comprised of Capex as fuel costs decline through the transition.

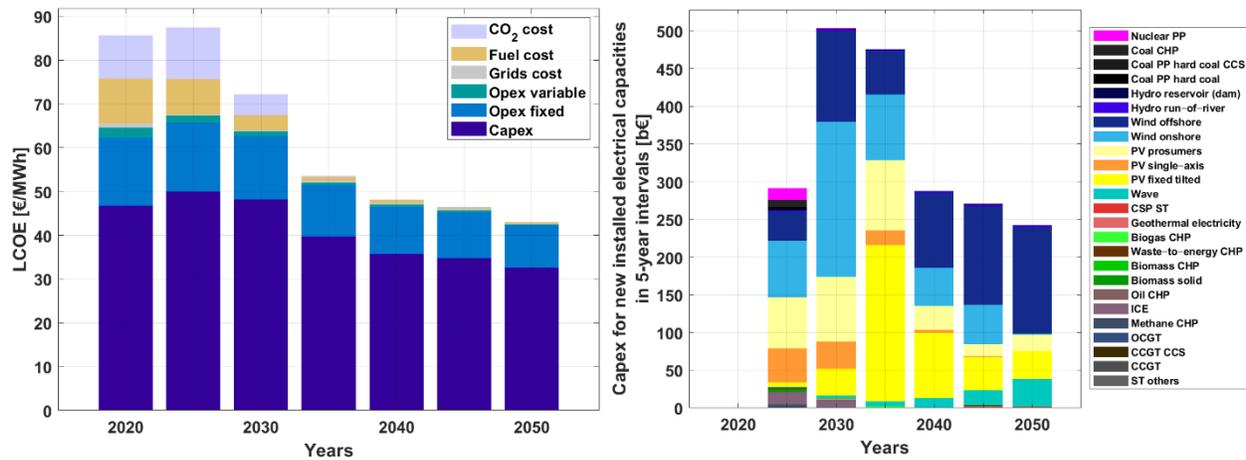


Figure C1.14: Levelised cost of electricity (left) and capital expenditures for electricity generation in five-year intervals (right) during the energy transition from 2020 to 2050 across the EU (REF).

Investments in the heat sector are mainly in heat pumps and some shares in biomass heating up to 2050, also shown in Figure C1.15. The steep increase in heat pump investments in the final five-year period until 2050 is mainly to cover the heat demand in the absence of fossil fuels as well as the lower costs of heat pumps by 2050. The LCOH of the heat sector, after an initial increase, declines from around 46 €/MWh in 2020 to around 24 €/MWh by 2050, as shown in Figure C1.15. The LCOH is predominantly comprised of Capex as fuel costs decline through the transition. Growing electrification and improvements in building renovation rates with efficiency gains enable the LCOH to decline in a stable manner up to 2050.

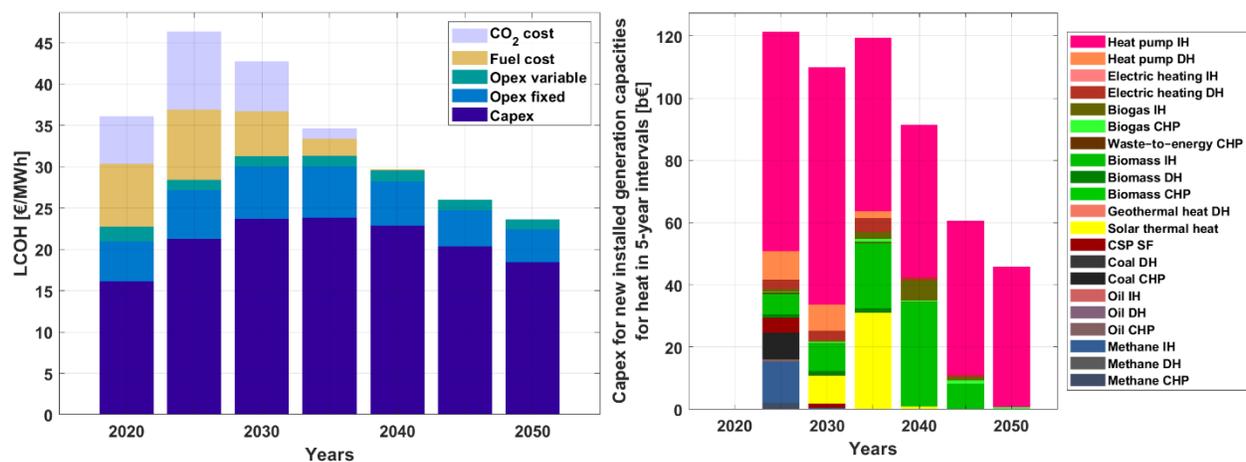


Figure C1.15: Levelised cost of heat (left) and capital expenditures for heat generation in five-year intervals (right) during the energy transition from 2020 to 2050 across the EU (REF).

The total annual energy costs for transport decline to about 120 b€ by 2050, as shown in Figure C1.16. During the same period, passenger transportation services increase by more than 50% and freight services by 25%, while energy demand decreases. This is primarily due to efficiency gains through electrification

of the sector resulting in lower annual system costs. Furthermore, annual system costs transit from being heavily dominated by fuel costs in 2020 to a very diverse share of costs across various technologies for electricity, synthetic e-fuels and sustainable biofuel production by 2050. Similarly, the final energy cost of energy and feedstock for the industry sector declines to about 65 b€ by 2050, driven by process changes as shown in Figure C1.16.

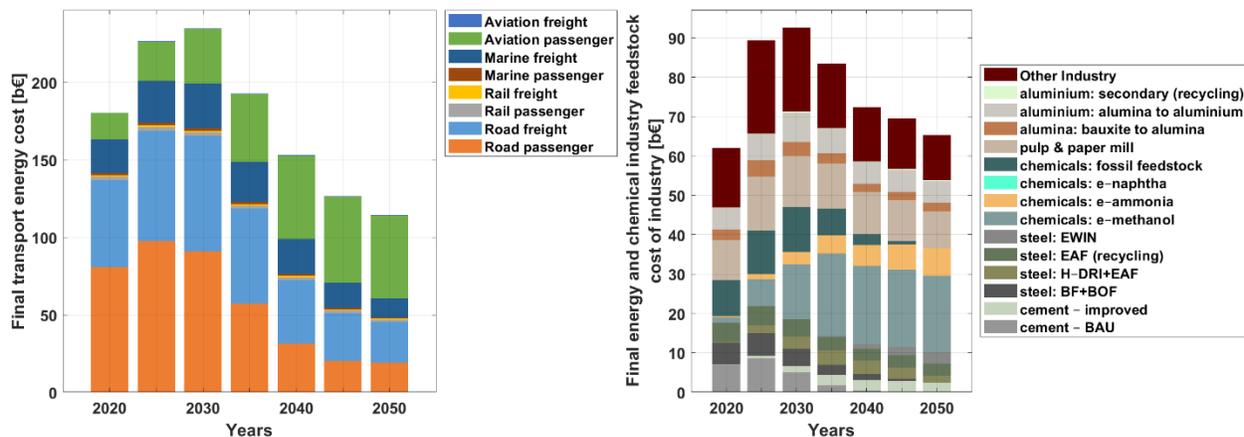


Figure C1.16: Final transport energy costs for different modes (left) and final energy and chemicals feedstock costs of different industries and processes (right) during the energy transition from 2020 to 2050 across the EU (REF).

CO₂ Emissions

The results of the energy transition towards high shares of renewable energy indicate a sharp decline in CO₂ emissions, reaching almost zero by 2050, across the power, heat, transport and industry sectors across the EU as shown in Figure C1.17. The power and heat sectors undergo a rapid transition towards renewables, whereas in the transport sector the transition is rather slow. In the industry sector, CO₂ emissions reduction are gradual with some residual emissions from limestone use in the cement industry in 2050. However, this emission is mitigated through natural climate or capture and storage solutions.

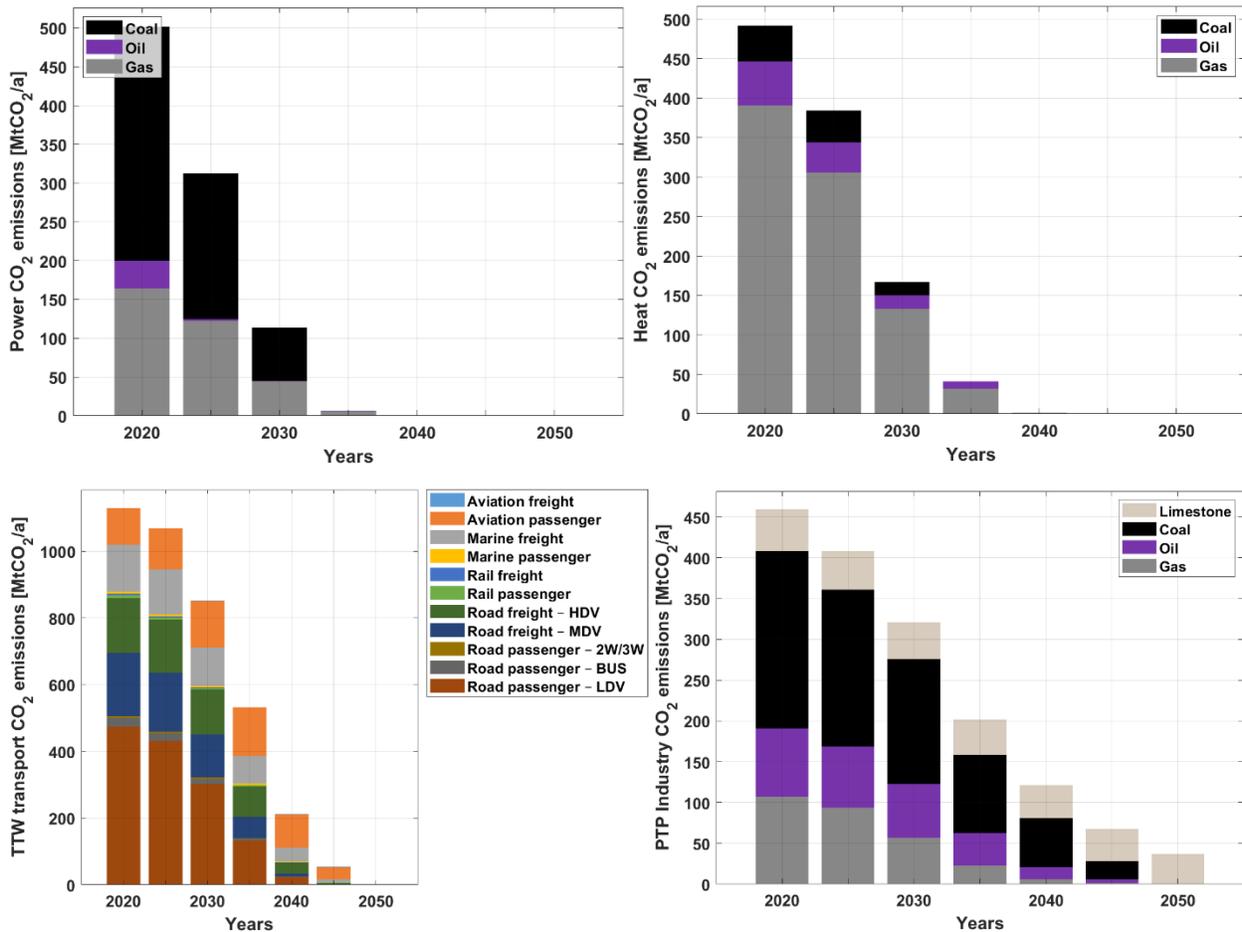


Figure C1.17: CO₂ emissions in the power sector from different fuels (top left), CO₂ emissions in the heat sector from different fuels (top right), CO₂ emissions in the transport sector from different modes (bottom left) and CO₂ emissions in the industry sector from different fuels (bottom right), during the energy transition from 2020 to 2050 across the EU. Tank to Wheel (TTW) and Plant to Product (PTP) considers CO₂ emissions from readily available fuels and does not consider CO₂ emissions from the upstream production and delivery of fuels (REF).

CO₂ emissions from the power sector decline through the transition from around 500 MtCO₂/a in 2020 to zero by 2050 as shown in Figure C1.17. Similarly, CO₂ emissions from the heat sector decline through the transition from over 480 MtCO₂/a in 2020 to zero by 2050 as shown in Figure C1.17. CO₂ emissions from the transport sector decline through the transition from around 1100 MtCO₂/a in 2020 to zero by 2050 and CO₂ emissions from the industry sector decline through the transition from over 450 MtCO₂/a in 2020 to nearly zero by 2050, with some residual emissions from limestone, as shown in Figure C1.17.

Regional Outlook

The regional distribution of electricity generation capacities, electricity generation, heat generation capacities, heat generation, electricity storage output, heat storage output, supply of fuels and chemicals across the EU, and electricity exchange across the European network are illustrated in the Figures C1.18 to C1.25. Further information during the different years of the transition for the 27 EU member states is provided in a supplementary data file.

Power generation capacities are distributed throughout the EU, with major shares of solar PV in the Southern member states, while wind power has major shares in the northern and western member states of the EU in 2050 (see Figure C1.18). PV prosumers are a relevant energy system feature in all member states. The total power generation capacity installed across the EU in the REF scenario in 2050 is 3952 GW.

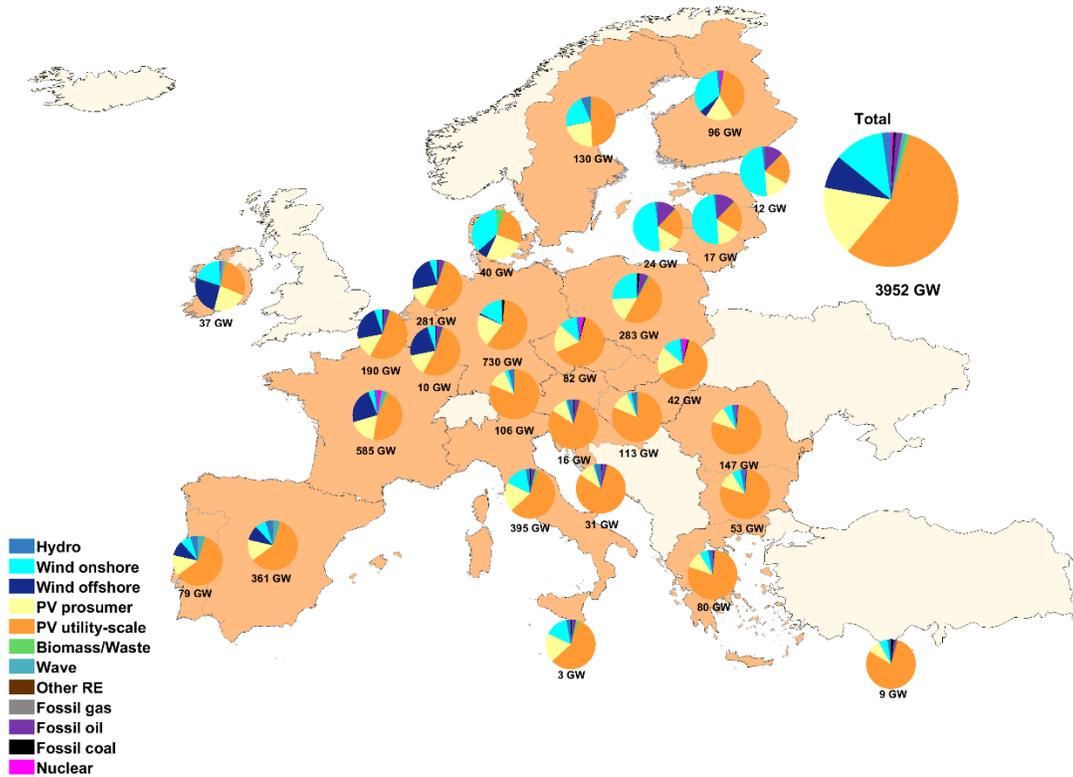


Figure C1.18: Regional electricity generation capacities in 2050 across the EU (REF).

Similarly, electricity generation shares vary across the EU, with total generation of 7042 TWh in the REF scenario in 2050. Solar PV generation shares dominate in the southern and western member states, while wind power has the major shares in the northern and Baltic member states (see Figure C1.19). PV prosumers are a relevant energy system feature in all member states. From an EU energy system point of view, the southern and northern member states have great complementarity in terms of resources.

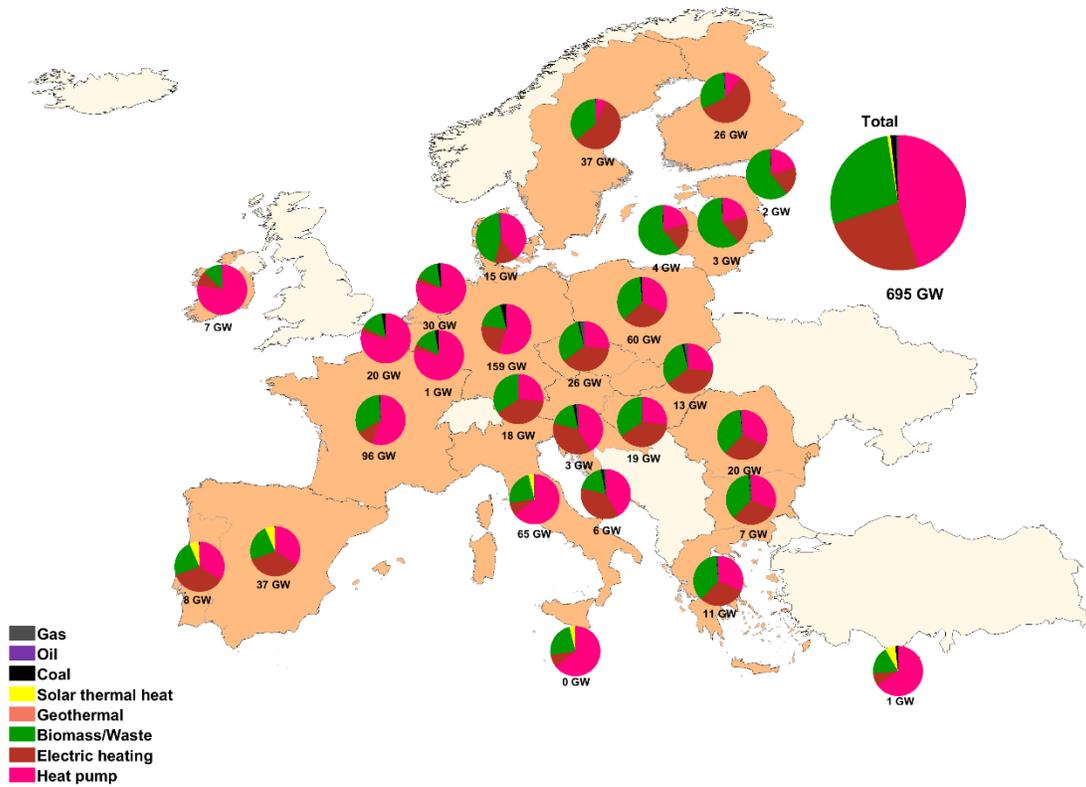


Figure C1.20: Regional heat generation capacities in 2050 across the EU (REF).

Total heat generation across the EU is 3064 TWh in the REF scenario in 2050. Major share is from heat pumps and electric heating across most states, while bioenergy contributes most of the heating in the eastern and Baltic states of the EU (see Figure C1.21).

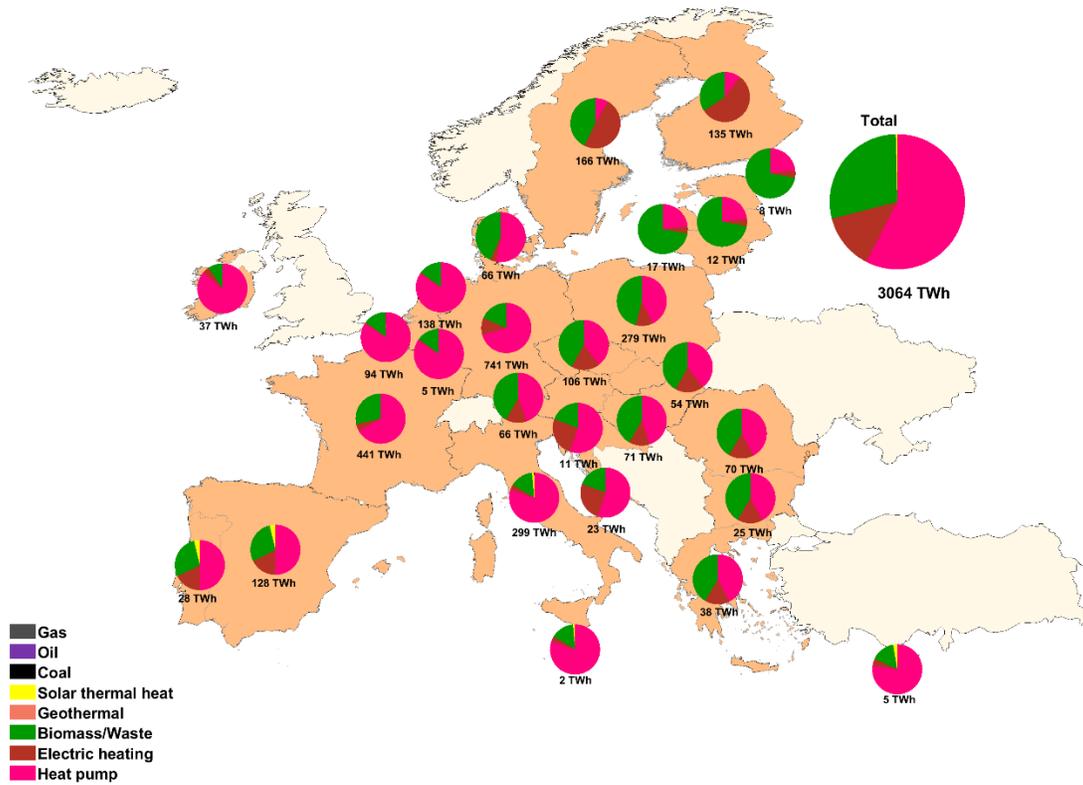


Figure C1.21: Regional heat supply in 2050 across the EU (REF).

Batteries (prosumers and utility-scale) along with vehicle-to-grid emerge as the dominant electricity storage sources across the EU in 2050, with 1147 TWh of storage output in the REF scenario. Prosumer batteries dominate across the EU, with some shares of utility scale batteries, vehicle-to grid and pumped hydro energy storage across the EU (see Figure C1.22).

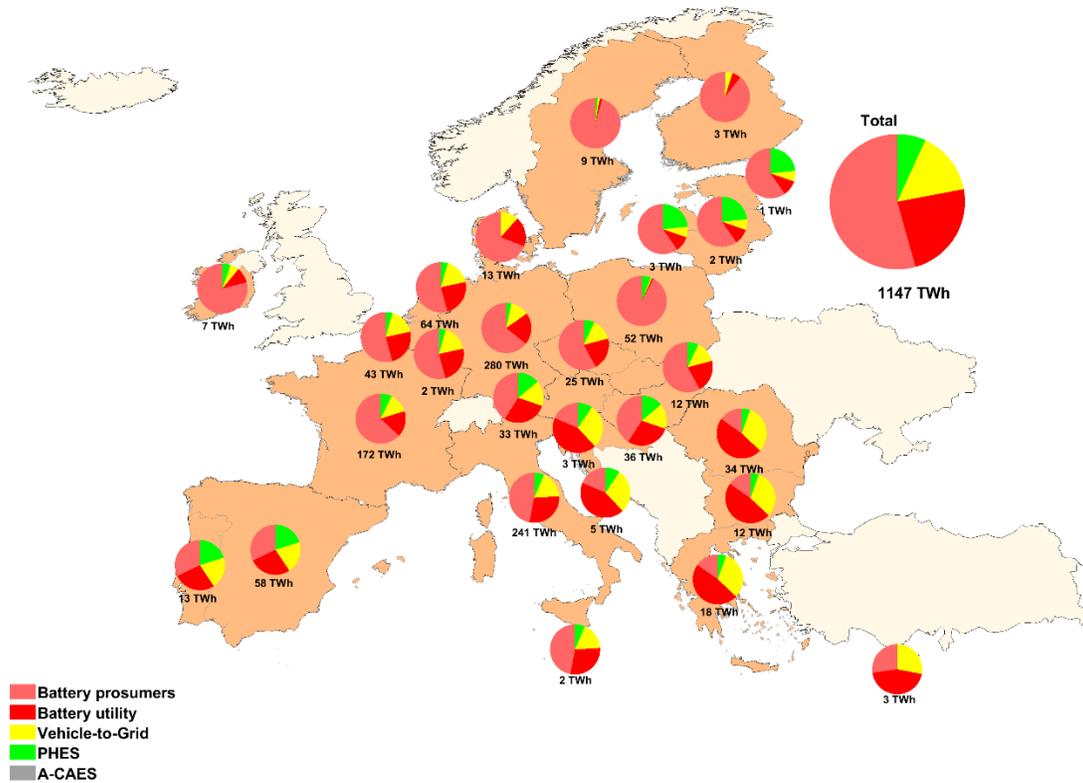


Figure C1.22: Regional electricity storage output in 2050 across the EU (REF).

Heat storage output is 704 TWh in 2050 across the EU in the REF scenario. It is well distributed across the member states and hydrogen storage provides the bulk of the heat across members states in 2050. While thermal energy storage provides major shares of the heat in some member states with high temperature heat. Some shares of biomethane storage output contribute across the EU for seasonal heat (see Figure C1.23).

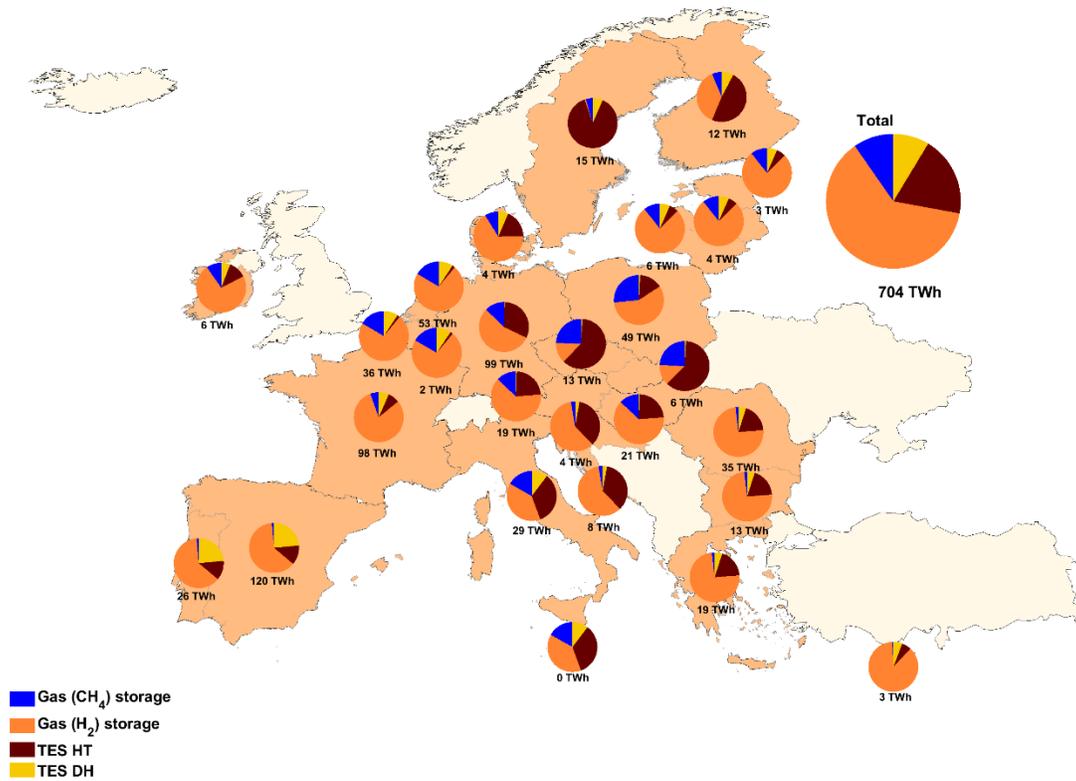


Figure C1.23: Regional heat storage output in 2050 across the EU (REF).

Supply of fuels and chemicals is well distributed across the EU with 4881 TWh in the REF scenario in 2050. Waste and residual biomass contribute the major share of fuels, while e-fuels and e-chemicals are well distributed across the EU (see Figure C1.24). Imports of e-fuels and e-chemicals contribute about 20% of the cost optimal supply in the REF scenario in 2050 and are dominant in the states with major ports in the EU.

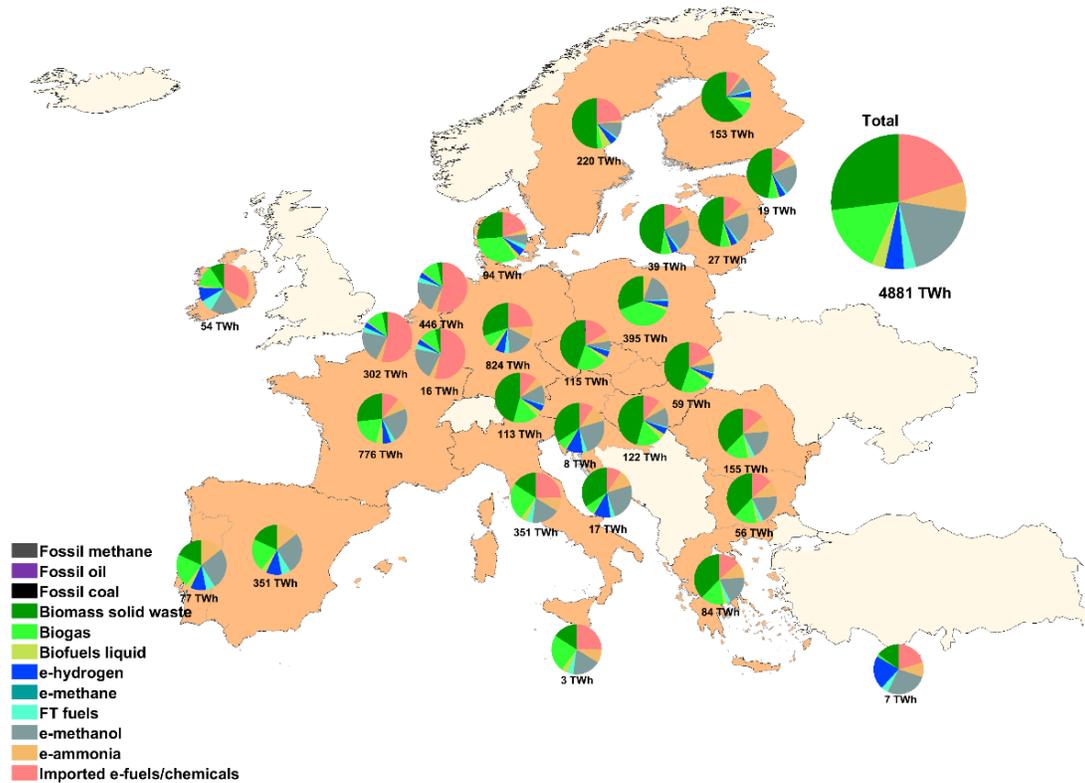


Figure C1.24: Regional fuels and chemicals supply in 2050 across the EU (REF).

The electricity network is robust and rapidly developing across the EU and beyond covering Europe. With energy resources distributed across the region, electricity trade is 830 TWh in 2050 across Europe in the REF scenario (see Figure C1.25), representing less than 12% of total electricity generation in EU. Net exporters and importers emerge across Europe to enable a cost optimal energy mix for the whole region.

Annual imported and exported electricity

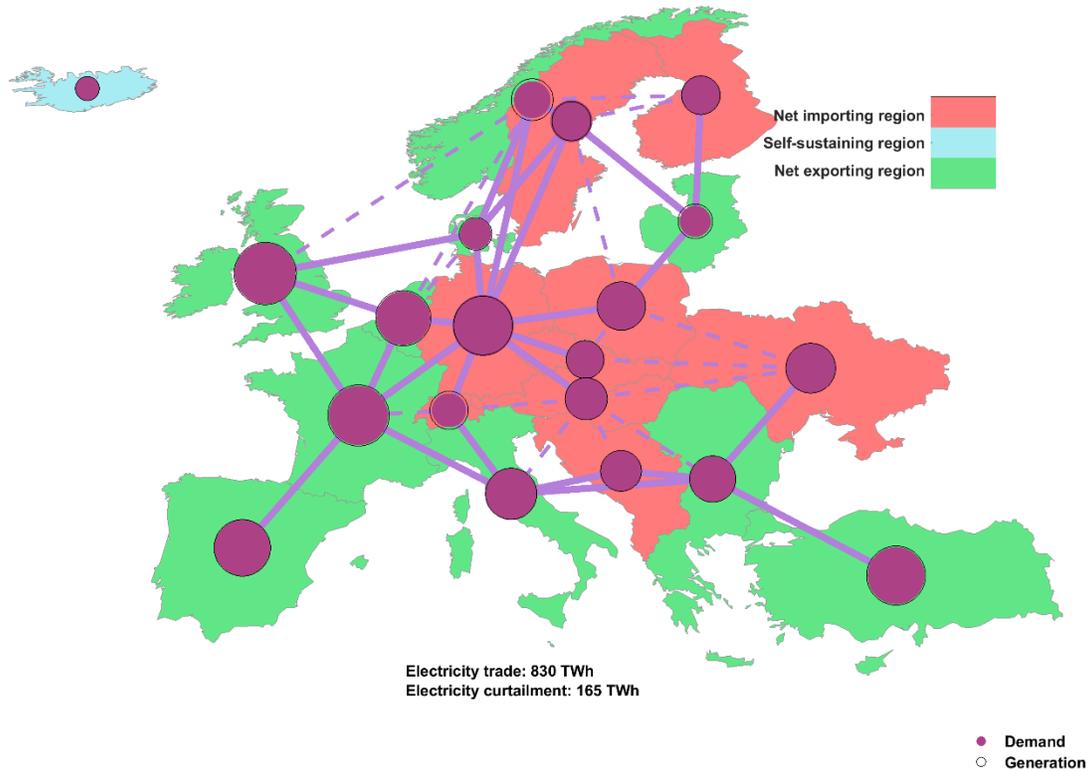


Figure C1.25: Regional electricity trade with net-importers and net-exporters in 2050 across Europe. Solid and dashed lines indicate used and not used interconnections, respectively (REF).

In the REF scenario, the energy system is highly sector coupled with flexible storage options, as shown in Figure C1.26. However, it still has some shares of nuclear power and imports (e-fuels and e-chemicals). The high level of diversification of energy sources is evident across the power, heat, transport and industry sectors, as shown by the increasing complexity in energy flows in Figure C1.26.

EU - REF 2050

Solar PV fixed tilted: 2338.2
 Solar PV single-axis: 466.4
 Solar PV prosumers: 721.4
 Wind Onshore: 1667.7
 Wind Offshore: 1145.0
 Wave: 166.5
 Hydro RoR: 125.3
 Hydro Dam: 81.9
 CSP: 0.1
 Geothermal: 5.2

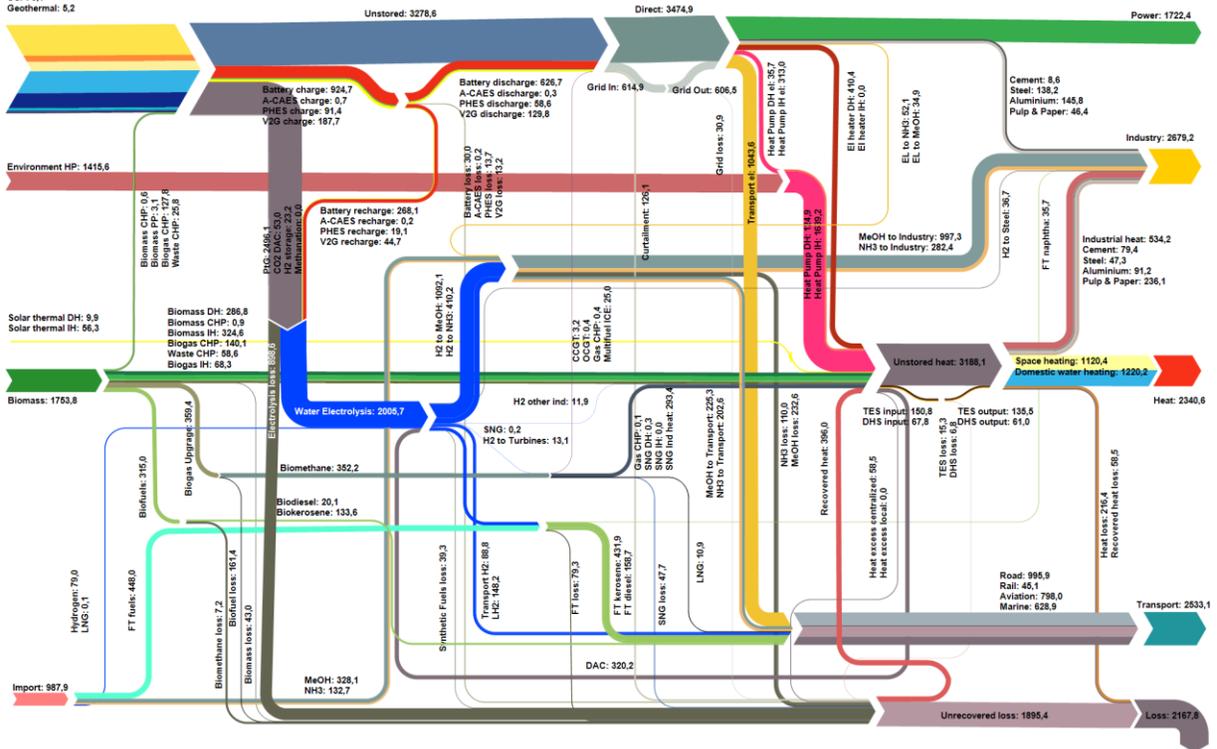


Figure C1.26: Energy flows of the EU energy system in 2050 (REF).

C2. RES-2040 Scenario

Energy Demand

In the RES-2040 scenario, the uptake of renewables is relatively faster as compared to the REF scenario, which also influences the change in resource efficiency through accelerated electrification. Efficiency measures such as improving building renovation rates, modal shift of transport towards electrified rail use and more conscious use of energy enable further gains in final and, consequently, primary energy. This eventually determines the levels of primary energy demand as shown in Figure C2.1.


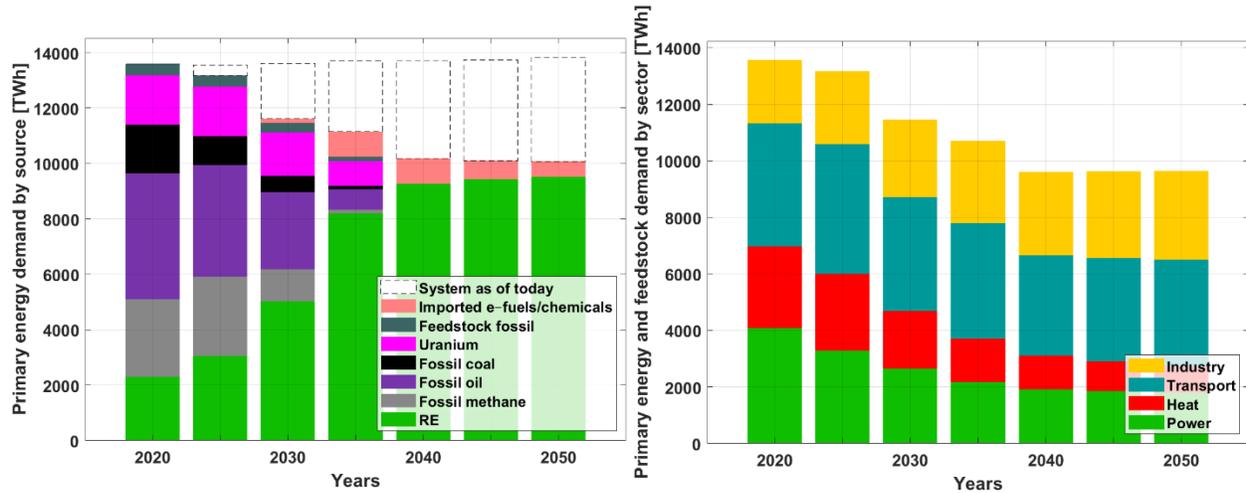


Figure C2.1: Primary energy demand according to sources (left) and on a sectoral basis (right), during the energy transition from 2020 to 2050 across the EU (RES-2040).

The primary energy demand decreases from over 13,500 TWh in 2020 to around 10,000 TWh by 2050 across the EU as shown in Figure C2.1. The gain in efficiencies compared to the ‘system as of today’ is due to electrification of the heat, transport and industry sectors, while the growth in demand for energy services continues. The final energy declines from about 11,000 TWh in 2020 to nearly 10,000 TWh in 2050, despite a high level of energy services, as shown in Figure C2.2. The different fuels that constitute the final energy demand¹ transition from mostly fossil fuels in 2020 to renewable electricity, heat, e-fuels and e-chemicals by 2050.

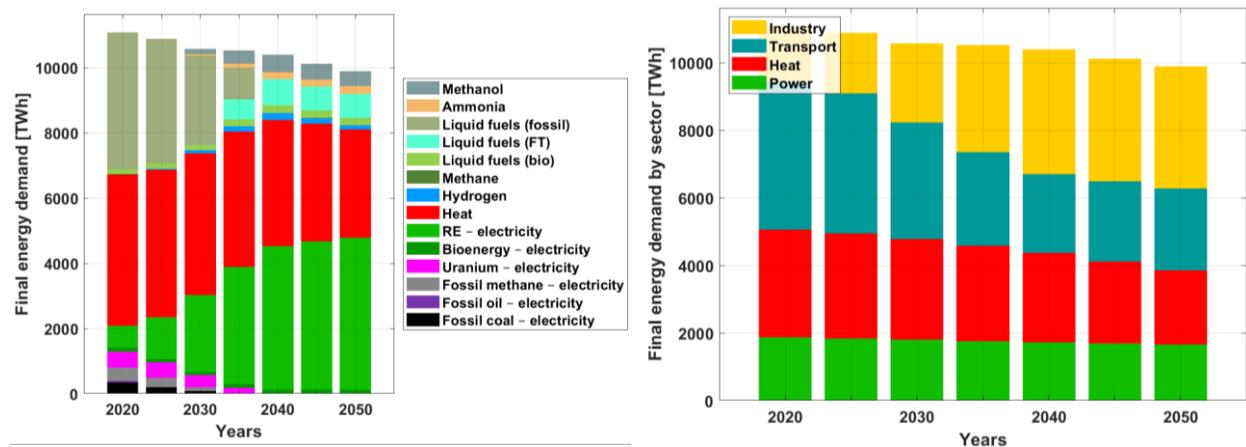

¹ Including the ambient heat for heat pumps

Figure C2.2: Final energy demand¹ according to sources (left) and on a sectoral basis (right), during the energy transition from 2020 to 2050 across the EU (RES-2040).

Sectoral Outlook

Energy supply is mainly through electricity and heat, as accelerated levels of electrification are achieved through the transition. An increasing amount of electricity generation is needed along with heat, storage and supply of fuels and chemicals to cover the future energy demand.

Electricity

The electricity generation capacity across the EU satisfies demand from all energy sectors including power, heat, transport and industry. The total installed capacity grows massively from about 750 GW in 2020 to over 4500 GW by 2050 as shown in Figure C2.3. In the initial period of the transition, a larger share of wind power capacities is installed up to 2030, but in the later part of the transition solar PV dominates the shares of installed capacities reaching almost 3500 GW by 2050. On the other hand, the shares of fossil fuels and nuclear power decline through the transition, with complete phaseout by 2040.

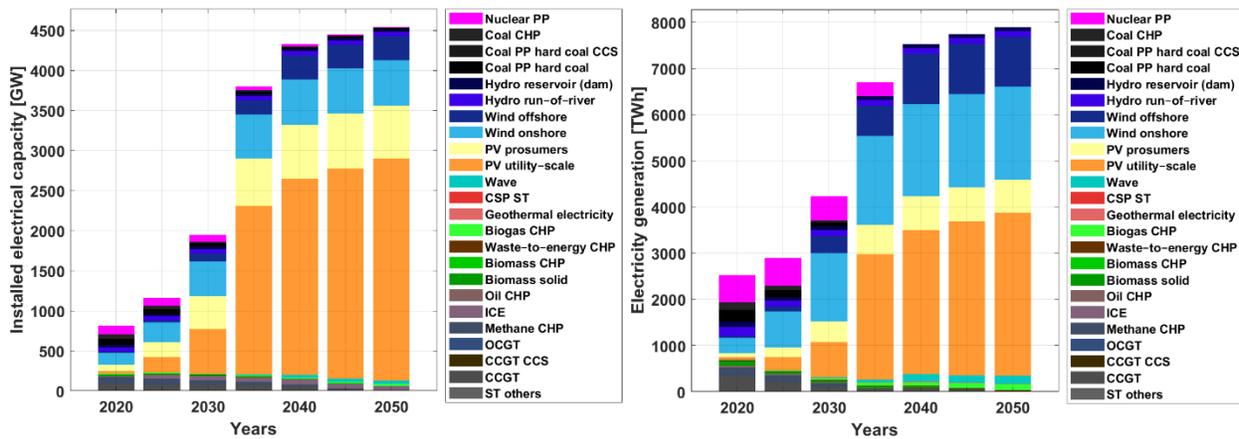


Figure C2.3: Technology-wise installed capacities (left) and technology-wise electricity generation (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

Electricity generation from the various technologies to cover the demand of power, heat, transport and industry sectors is shown in Figure C2.3. Solar PV supply increases through the transition along with wind power, wave power and electricity from waste and residual biomass up to 2050.

Heat

In the heat sector, heat pumps, electric heating, and biomass-based heating constitute the majority of installed capacity by 2050, also shown in Figure C2.4. A decrease in total installed capacity of heating technologies occurs mainly due to efficiency gains with heat pumps and electric heating, as fossil fuels recede from the energy system. The key driver is the tripling of building renovation rates and linear increase of industrial heat efficiency to 2.2% per annum until 2030. Heat pumps play a significant role through the transition with a share of over 50% of heat generation by 2050 on both the district and individual levels, as indicated in Figure C2.4. On the other hand, fossil gas-based heating decreases through the transition from over 75% in 2020, to zero by 2040. Moreover, fossil fuels based heat generation declines through the

¹ Including the ambient heat for heat pumps

transition period as coal-based combined heat and power (CHP) and district heating (DH) are replaced by heat generation from heat pumps, waste-to-energy CHP, biomass-based DH, and individual heating (IH).

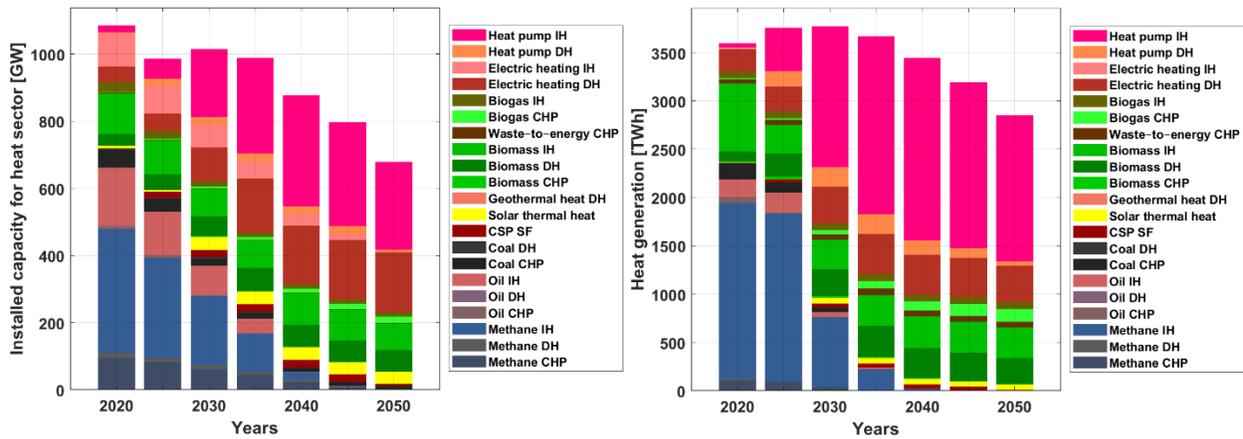


Figure C2.4: Technology-wise heat generation capacities (left) and technology-wise heat generation (right) during the energy transition from 2025 to 2050 across the EU (RES-2040).

Electricity, Heat and Gas Storage

Energy storage technologies play a critical role in enabling a secure energy supply across the EU, fully based on renewable energy across different sectors. The installed electricity storage capacity increases from just 0.4 TWh in 2020 to around 5.5 TWh by 2050, as shown in Figure C2.5. Utility-scale and prosumer batteries with major shares of vehicle-to-grid dominate, some PHES remains through the transition. Utility-scale and prosumer batteries contribute a major share of the electricity storage output with hydrogen and methane based output contributing beyond 2035, as highlighted by Figure C2.5. In addition, vehicle-to-grid, PHES contributes some shares through the transition.

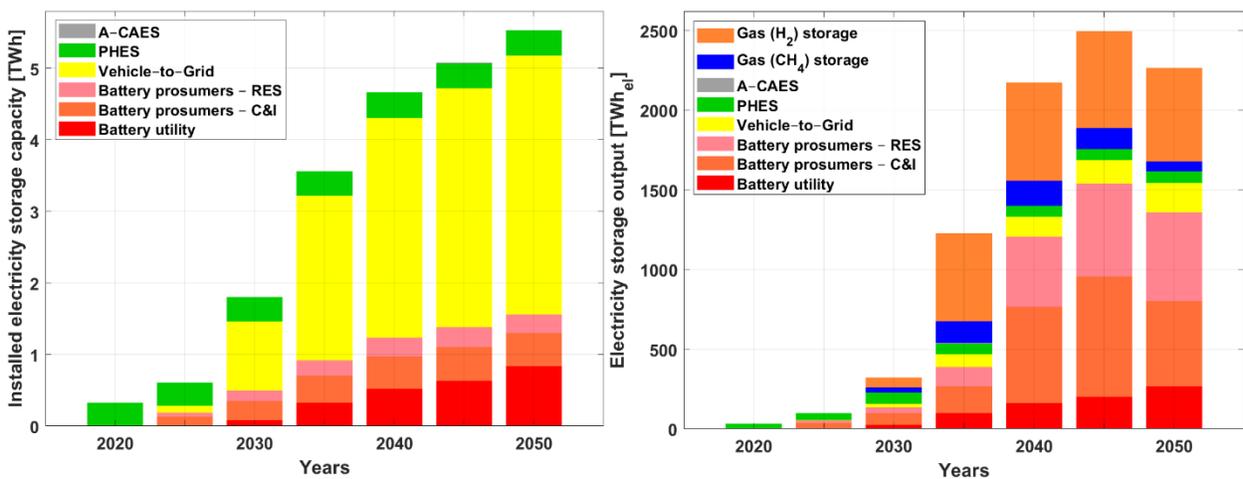


Figure C2.5: Installed electricity storage capacities (left) and electricity storage output (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

Heat storage plays a vital role in ensuring that the heat demand is covered in all sectors. The installed heat storage grows substantially from 2030 onwards, installed capacities are dominated by gas storage (hydrogen and methane), as shown in Figure C2.6. This substantial capacity addition is mainly to provide seasonal storage across the EU covering the heat demand in the absence of fossil fuels. The present fossil gas storage capacity across the EU is around 1000 TWh⁵⁴, hence an even lesser amount of gas storage would be needed

for an integrated energy system in the future. Thermal energy storage emerges with heat storage output from 2030 until 2050, as shown in Figure C2.6. Hydrogen gas storage contributes a majority of the heat storage output from 2035 to 2050 along with some shares of biomethane, covering predominantly the seasonal demand, which is covered by fossil gas before 2030.

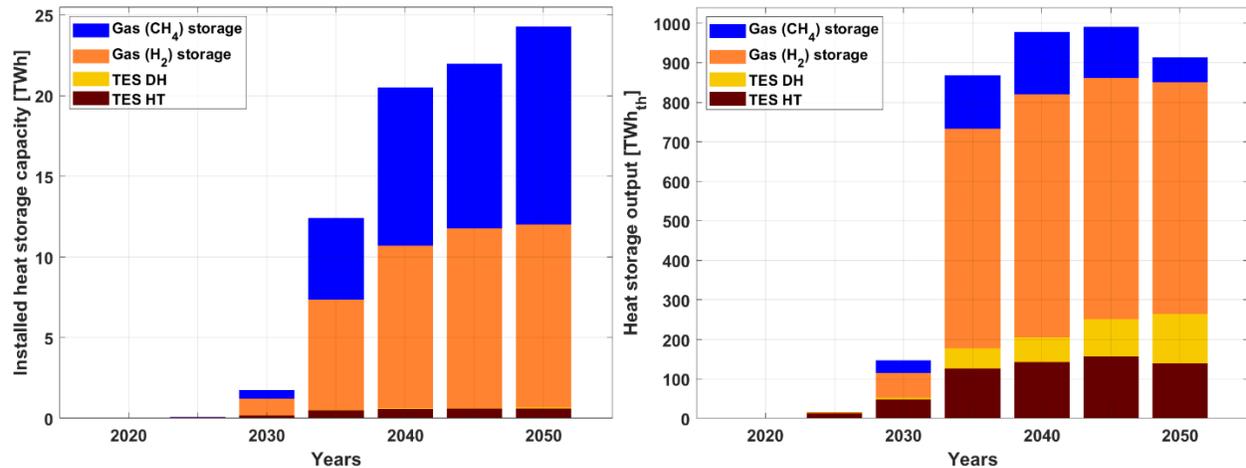


Figure C2.6: Heat storage installed capacities (left) and heat storage output (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

Transport and Industry

The final energy demand of the transport sector across the EU is almost twice the energy demand from the power sector at around 4400 TWh in 2020. However, this demand declines through the transition to around 2000 TWh by 2050, as shown in Figure C2.7. This is achieved mainly due to efficiency gains brought about by electrification of the sector, mainly road transport. On the other hand, the energy and feedstock demand for the industry sector grows through the transition driven by production of sustainable chemicals and fuels, as shown in Figure C2.7.

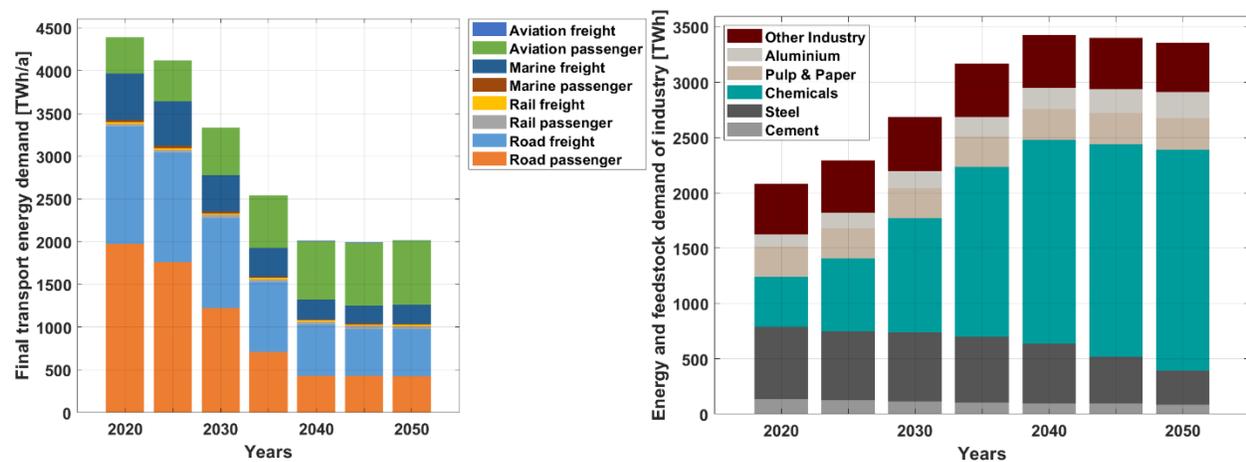


Figure C2.7: Final energy demand for transport (left) and energy and feedstock demand¹ for various industries (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

The road transport energy demand declines through the transition with massive gains from high levels of direct electrification, whereas the final energy demand increases for aviation in the last few years, not only

¹ Including the ambient heat for heat pumps

due to a continuous transportation demand, but also driven by increasing specific energy demand due to production of synthetic e-fuels. Energy demand for the rail mode remains fairly stable through the transition, as it already at a high level of electrification across the EU. The development of the final energy demand for the different transport modes through the transition is shown in Figure C2.7. The low efficiency of the present transport sector is highlighted by the projection of an about 80% increase in transportation demand, but declining final energy demand for the transport sector.

Electrification of Heat, Transport and Industry Sectors

The heat, transport and industry sectors undergo a significant transformation in the course of the energy transition, as high levels of electrification (direct and indirect) lead to higher demand for electricity and a rapid decline in demand for fossil fuels.

The share of electricity in the final energy demand for heat increases substantially with about 2100 TWh by 2050, while the share of fossil fuels in the final energy demand declines to zero by 2040 from nearly 2400 TWh in 2020, as shown in Figure C2.8.

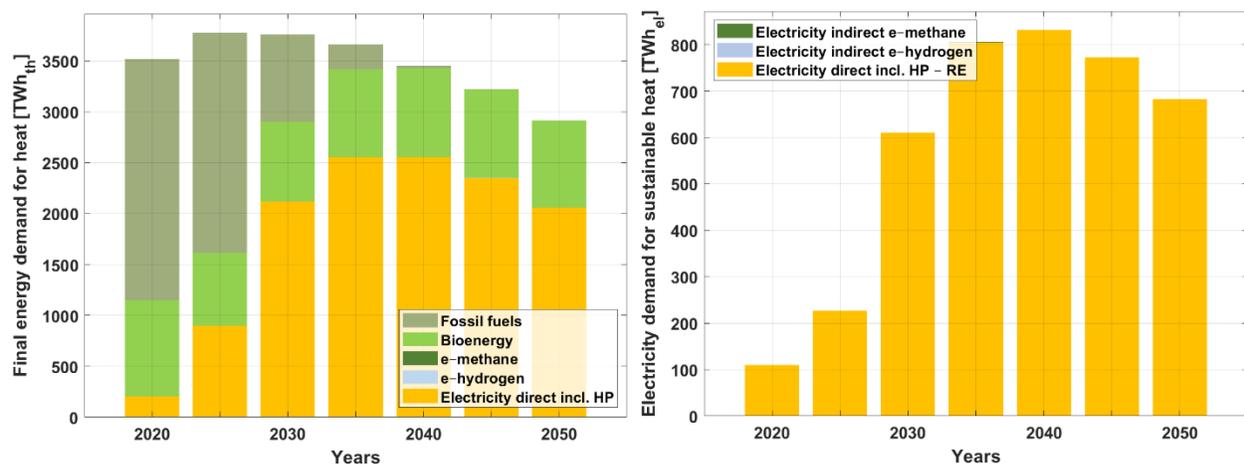


Figure C2.8: Final energy demand for heat¹ (left) and electricity demand for sustainable heat (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

Electricity demand to provide sustainable heat increases through the transition to around 680 TWh_{el} by 2050.

Fossil fuels consumption in the transport sector across the EU is seen to decline through the transition from about 95% in 2020 to zero by 2040. On the other hand, liquid fuels produced by renewable electricity contribute around 25% of final energy demand in 2050. In addition, hydrogen constitutes around 15% of final energy demand in 2050 along with some shares of e-methanol and e-ammonia, as shown in Figure C2.9. Sustainable biofuels from waste and residual biomass contribute some shares as part of renewable liquid fuels. Electrification of the transport sector creates an electricity demand of nearly 3100 TWh_{el} by 2050. The massive demand for synthetic e-chemicals and liquid e-fuels kicks in from 2035 onwards up until 2050, as indicated in Figure C2.9. This demand for e-fuels and e-chemicals is predominantly induced by aviation and marine modes in the transport sector.

¹ Including the ambient heat for heat pumps

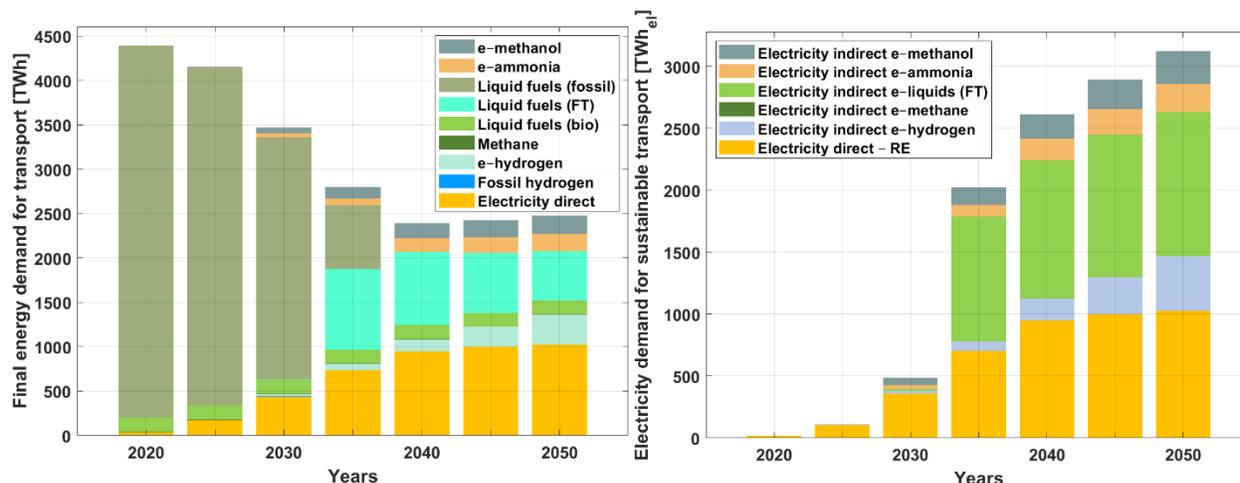


Figure C2.9: Final energy demand for transport (left) and electricity demand for sustainable transport (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

As renewable electricity use in the industry sector grows, fossil fuels are replaced by green e-hydrogen and other e-fuels and e-chemicals in 2040, as shown in Figure C2.10. Electrification of the industry sector creates an electricity demand of about 2200 TWh_{el} by 2050. The massive demand for green e-hydrogen kicks in from 2030 onwards up until 2050, mainly for the production of sustainable e-chemicals, as indicated in Figure C2.10.

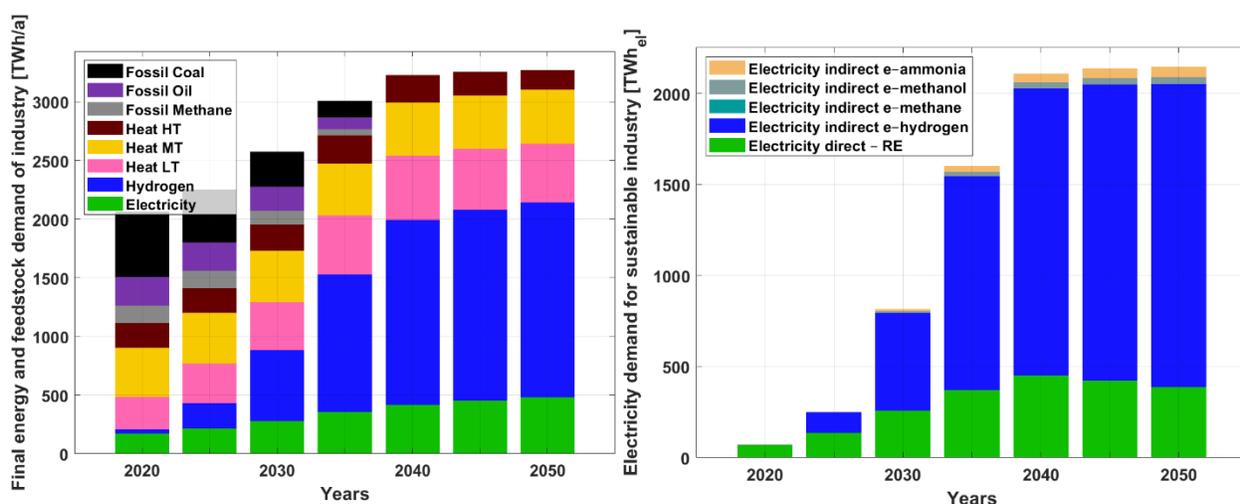


Figure C2.10: Energy and feedstock demand for industry¹ (left) and electricity demand for sustainable industry (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

Fuels, Chemicals and Carbon Supply

An essential aspect in the transition of the transport sector towards higher electrification completely based on high shares of renewable energy is the production of synthetic fuels and chemicals: e-hydrogen, e-methane, Fischer-Tropsch fuels, e-methanol and e-ammonia. As indicated in Figure C2.11, fossil fuels are completely replaced by a combination of sustainable fuels and chemicals by 2040. Additionally, CO₂ direct air capture, which is vital in the production of synthetic e-fuels, supplies up to nearly 430 MtCO₂ by 2050,

¹ Including the ambient heat for heat pumps

as shown in Figure C2.12. Some CO₂ buffer storage, which stores CO₂ from DAC systems to be utilised in the production of e-fuels and e-chemicals, complements CO₂ supply in the energy system.

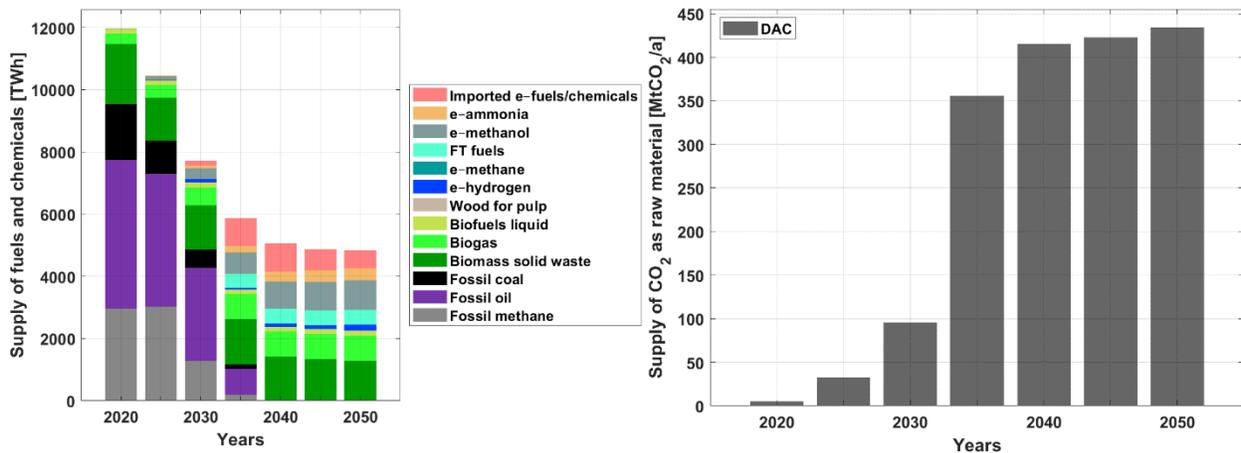


Figure C2.11: Supply of fuels and chemicals (left) and CO₂ as raw material (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

Costs and Investments

The total annual costs decline from about 620 b€ in 2025 to about 480 b€ in 2050 through the transition period and are well distributed across the major sectors of power, heat, transport and industry across the EU. As indicated in Figure C2.12, Capex increases through the transition, as fuel costs decline. The steady increase in Capex-related energy system costs indicate that fuel imports and the respective negative impacts on trade balances will fade out through the transition. In addition, a low fuel import dependency will lead to a higher level of energy security across the EU much faster.

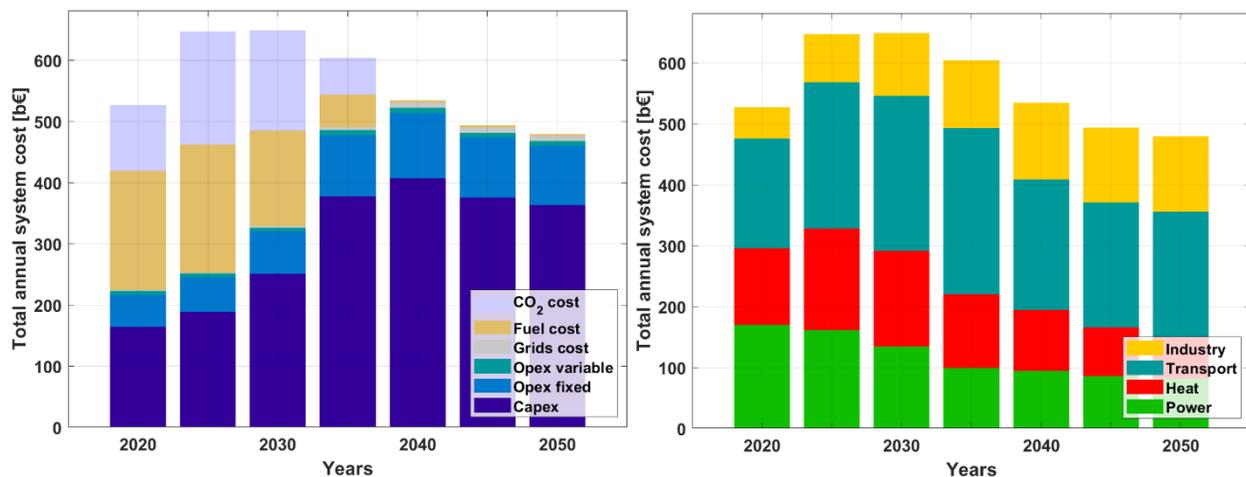


Figure C2.12: Annual energy system costs composed of different parameters (left) and of different sectors (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

As increasing shares of power generation capacities are added globally, renewable energy sources on a levelised cost of energy basis become the lowest cost power generation source⁵⁵. As indicated in Figure C2.13, levelised cost of energy remains stable at around 52 €/MWh by 2050 and is increasingly dominated by capital costs as fuel costs continue to phase out through the transition period, which could mean increased self-reliance in terms of energy for the EU by 2040. Capital costs are well spread across a range of

technologies with major investments for solar PV, wind power, batteries, heat pumps, and synthetic e-fuel and e-chemicals conversion technologies up to 2050, as shown in Figure C2.13.

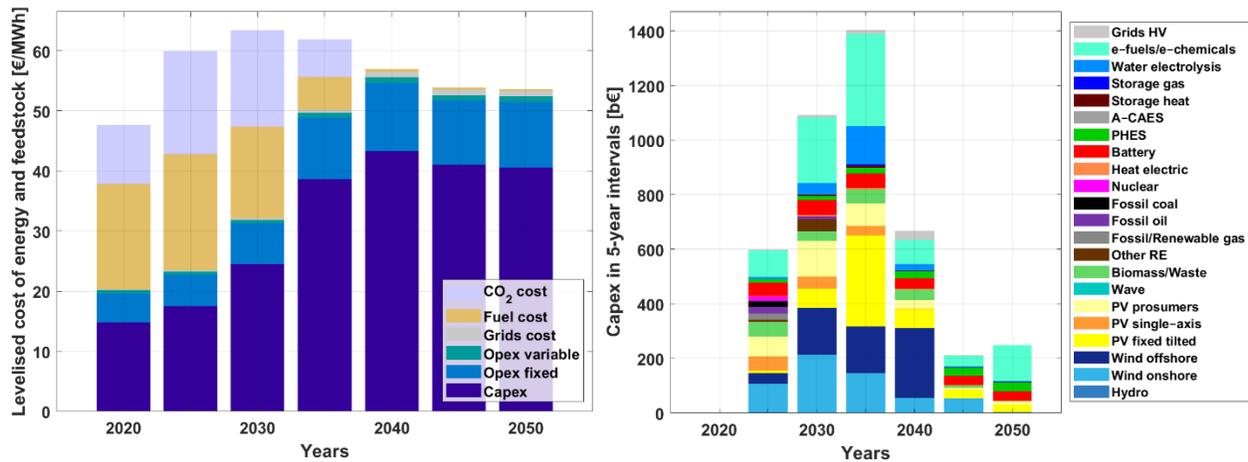


Figure C2.13: Levelised cost of energy (left) and capital expenditures in five-year intervals (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

Capital expenditures are well spread across a range of power generation technologies with the majority share in wind power up to 2030, beyond which solar PV dominates investments up to 2050, as shown in Figure C2.14. The LCOE of the power sector decreases substantially from around 84 €/MWh in 2020 to around 41 €/MWh by 2050, as shown in Figure C2.14. LCOE is predominantly comprised of Capex as fuel costs decline through the transition.

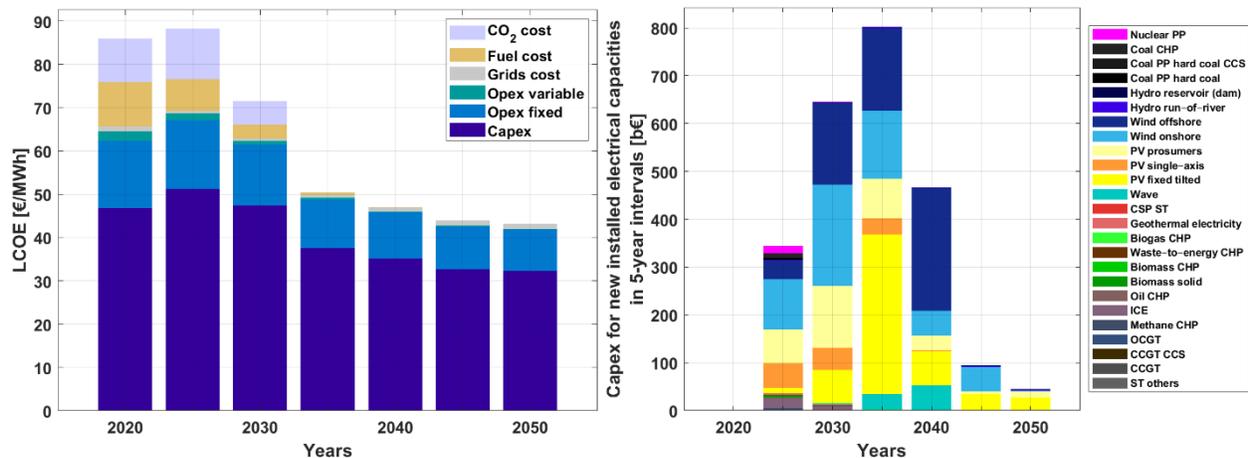


Figure C2.14: Levelised cost of electricity (left) and capital expenditures for electricity generation in five-year intervals (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

Investments in the heat sector are mainly in heat pumps and some shares in biomass heating up to 2050, also shown in Figure C2.15. The steep increase in heat pump investments in the final five-year period until 2050 is mainly to cover the heat demand in the absence of fossil fuels as well as the lower costs of heat pumps by 2050. The LCOH of the heat sector, after an initial increase, declines from over 48 €/MWh in 2025 to around 23 €/MWh by 2050, as shown in Figure C2.15. The LCOH is predominantly comprised of Capex as fuel costs decline through the transition. Rapid electrification and improvements in building renovation rates with efficiency gains enable the LCOH to decline in a stable manner up to 2050.

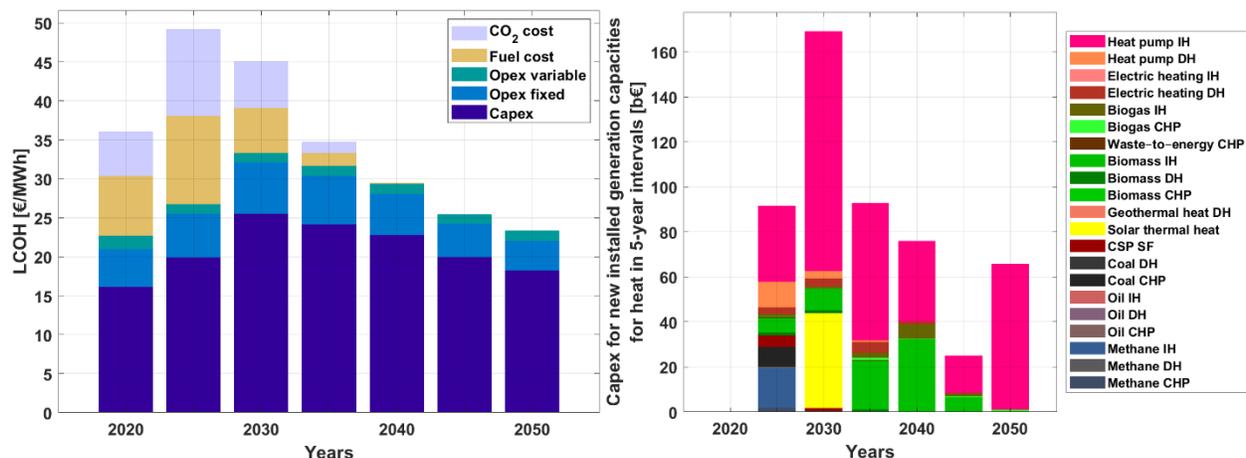


Figure C2.15: Levelised cost of heat (left) and capital expenditures for heat generation in five-year intervals (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

The total annual energy costs for transport decline to about 140 b€ by 2050, as shown in Figure C2.16. During the same period, passenger transportation services increase by more than 50% and freight services by 25%, while energy demand decreases. This is primarily due to efficiency gains through electrification of the sector resulting in lower annual system costs. Furthermore, annual system costs transit from being heavily dominated by fuel costs in 2020 to a very diverse share of costs across various technologies for electricity, synthetic e-fuels and sustainable biofuel production by 2050. Similarly, the final energy cost of energy and feedstock for the industry sector declines to about 65 b€ by 2050, driven by process changes as shown in Figure C2.16.

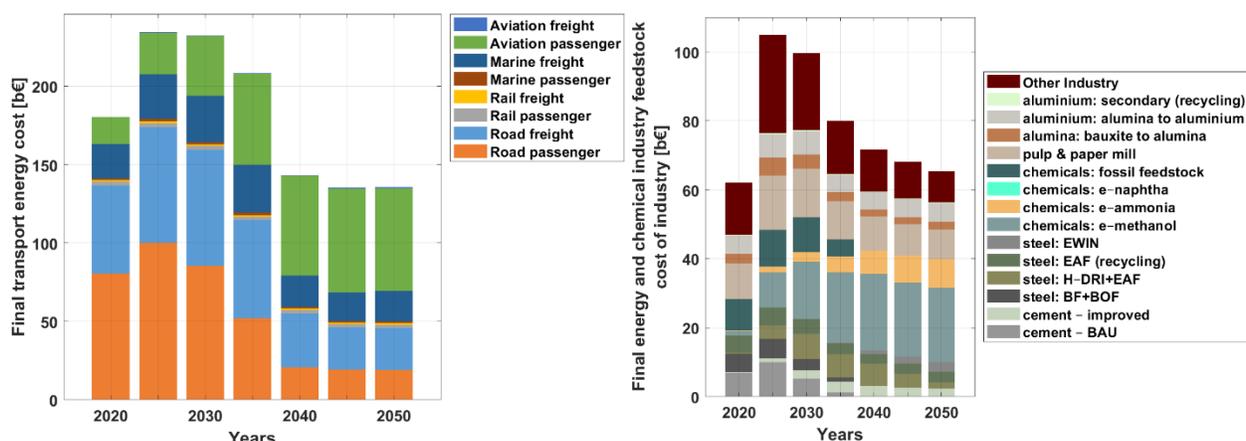


Figure C2.16: Final transport energy costs for different modes (left) and final energy and chemicals feedstock costs of different industries and processes (right) during the energy transition from 2020 to 2050 across the EU (RES-2040).

CO₂ Emissions

The results of the energy transition towards high shares of renewable energy indicate a sharp decline in CO₂ emissions, reaching almost zero by 2040, across the power, heat, transport and industry sectors across the EU as shown in Figure C2.18. The power and heat sectors undergo a deep defossilisation, whereas for the transport sector it is rather slow. In the industry sector, CO₂ emissions reduction are rather slow with some residual emissions from limestone use in the cement industry from 2040. However, this emission is mitigated through natural climate or capture and storage solutions.

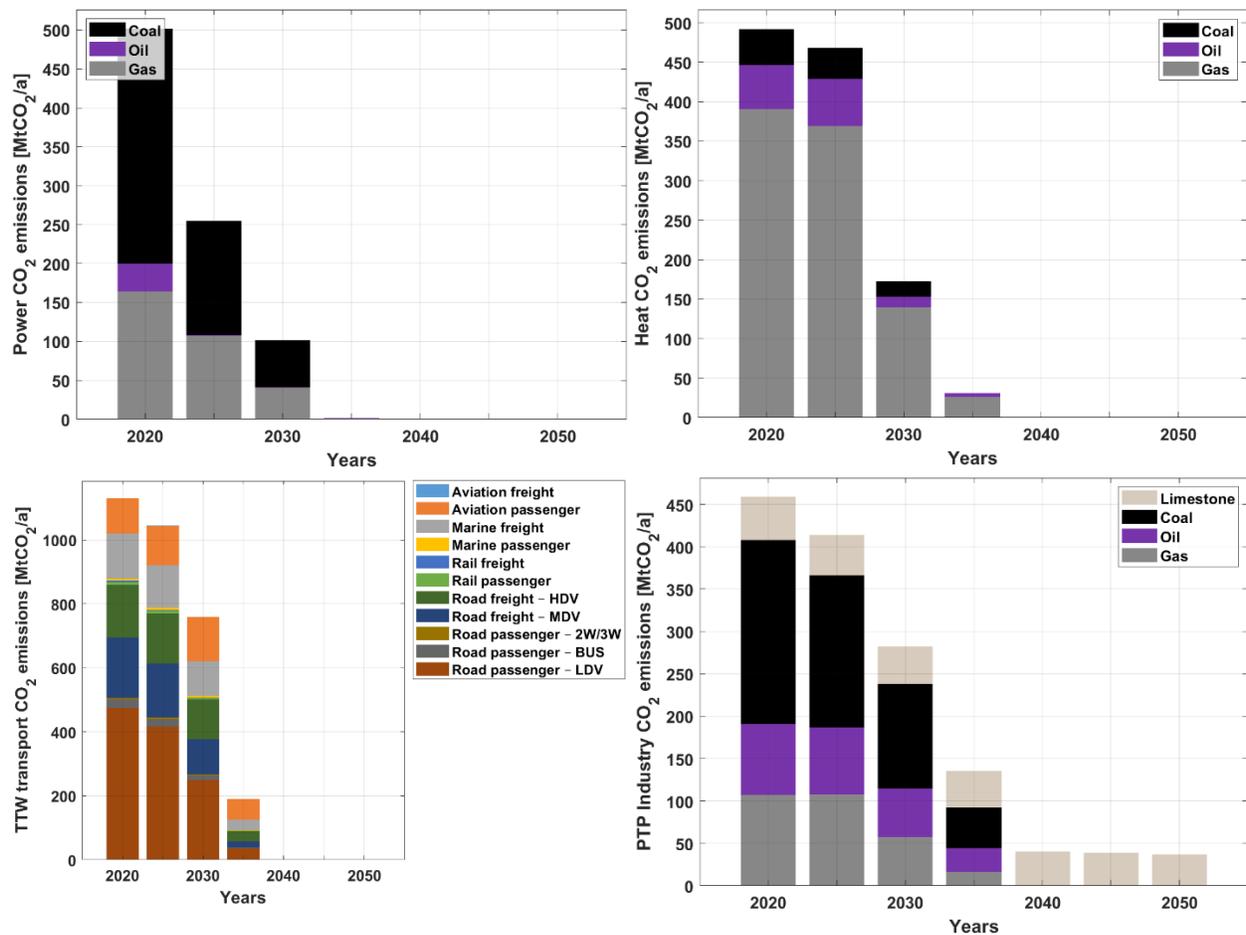


Figure C2.17: CO₂ emissions in the power sector from different fuels (top left), CO₂ emissions in the heat sector from different fuels (top right), CO₂ emissions in the transport sector from different modes (bottom left) and CO₂ emissions in the industry sector from different fuels (bottom right), during the energy transition from 2020 to 2050 across the EU. Tank to Wheel (TTW) and Plant to Product (PTP) considers CO₂ emissions from readily available fuels and does not consider CO₂ emissions from the upstream production and delivery of fuels (RES-2040).

CO₂ emissions from the power sector decline through the transition from around 500 MtCO₂/a in 2020 to zero by 2035 as shown in Figure C2.17. Similarly, CO₂ emissions from the heat sector decline through the transition from over 480 MtCO₂/a in 2020 to zero by 2040 as shown in Figure C2.17. CO₂ emissions from the transport sector decline through the transition from around 1100 MtCO₂/a in 2020 to zero by 2040 and CO₂ emissions from the industry sector decline through the transition from over 450 MtCO₂/a in 2020 to nearly zero by 2040, with some residual emissions from limestone, as shown in Figure C2.17.

Regional Outlook

The regional distribution of electricity generation capacities, electricity generation, heat generation capacities, heat generation, electricity storage output, heat storage output, supply of fuels and chemicals across the EU, and electricity exchange across the European network are illustrated in the Figures C2.18 to C2.25. Further information during the different years of the transition for the 27 EU member states is provided in a supplementary data file.

Power generation capacities are distributed throughout the EU, with major shares of solar PV in the Southern member states, while wind power has major shares in the northern and western members states of the EU in 2050 (see Figure C2.18). PV prosumers are a relevant energy system feature in all member states. The total power generation capacity installed across the EU in the RES-2040 scenario in 2050 is 4543 GW.

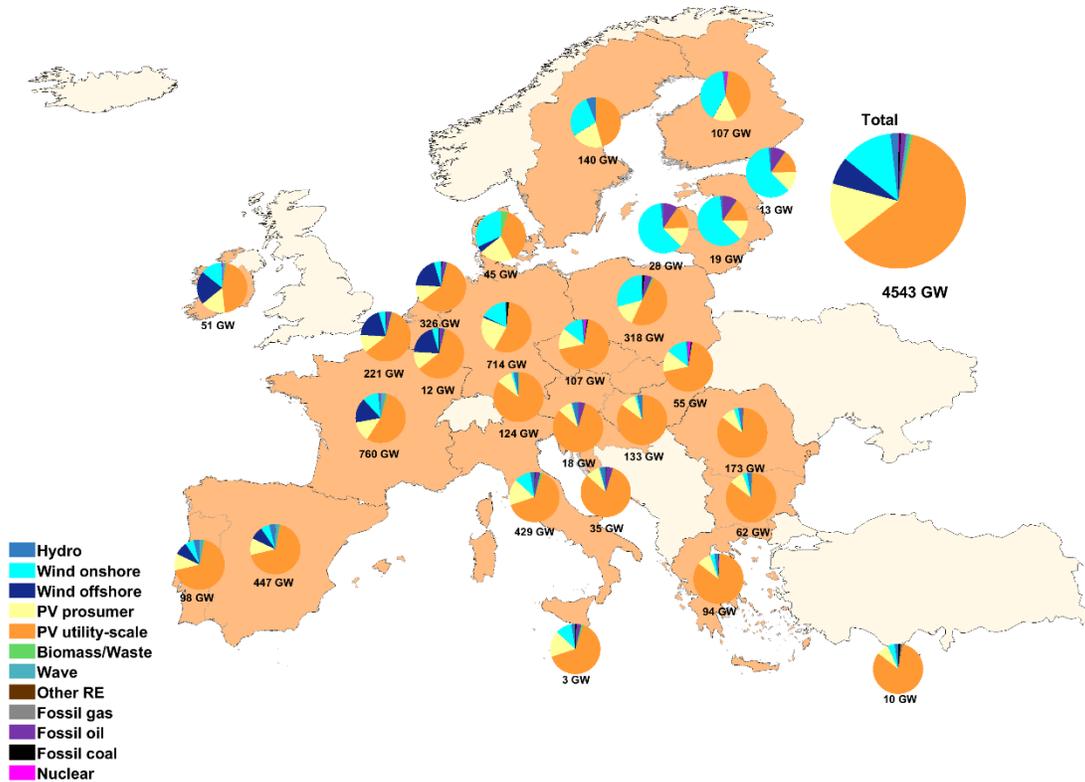


Figure C2.18: Regional electricity generation capacities in 2050 across the EU (RES-2040).

Similarly, electricity generation shares vary across the EU, with total generation of 7911 TWh in the RES-2040 scenario in 2050. Solar PV generation shares dominate in the southern and western member states, while wind power has the major shares in the northern and Baltic member states (see Figure C2.19). PV prosumers are a relevant energy system feature in all member states. From an EU energy system point of view, the southern and northern member states have great complementarity in terms of resources.

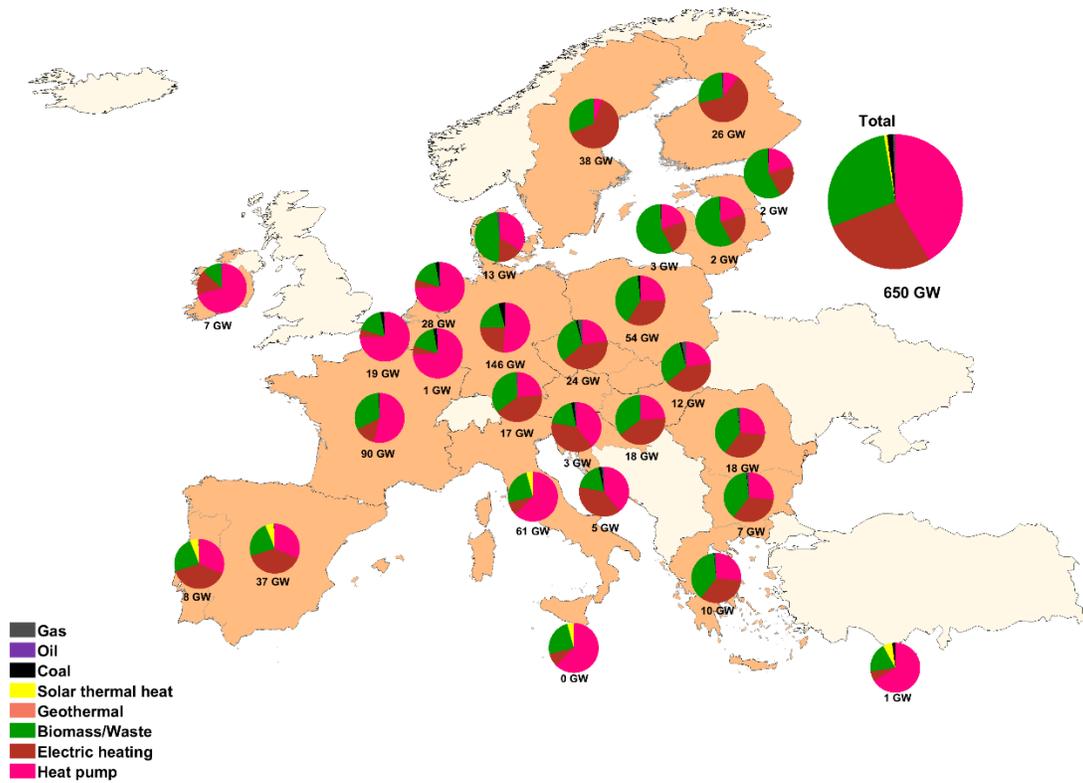


Figure C2.20: Regional heat generation capacities in 2050 across the EU (RES-2040).

Total heat generation across the EU is 2802 TWh in the RES-2040 scenario in 2050. Major share is from heat pumps and electric heating across most states, while bioenergy contributes most of the heating in the eastern and Baltic states of the EU (see Figure C2.21).

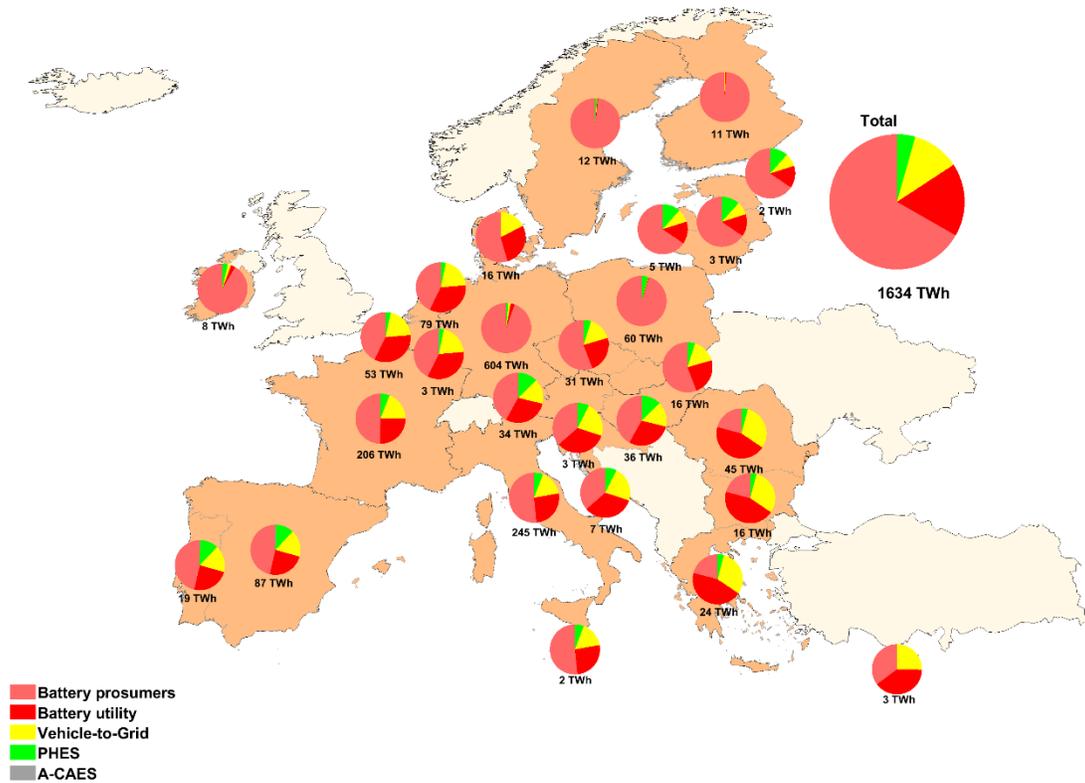


Figure C2.22: Regional electricity storage output in 2050 across the EU (RES-2040).

Heat storage output is 914 TWh in 2050 across the EU in the RES-2040 scenario. It is well distributed across the member states and hydrogen storage provides the bulk of the heat across member states in 2050. While thermal energy storage provides major shares of the heat in some member states with high temperature heat. Some shares of biomethane storage output contribute across the EU for seasonal heat (see Figure C2.23).

Annual imported and exported electricity

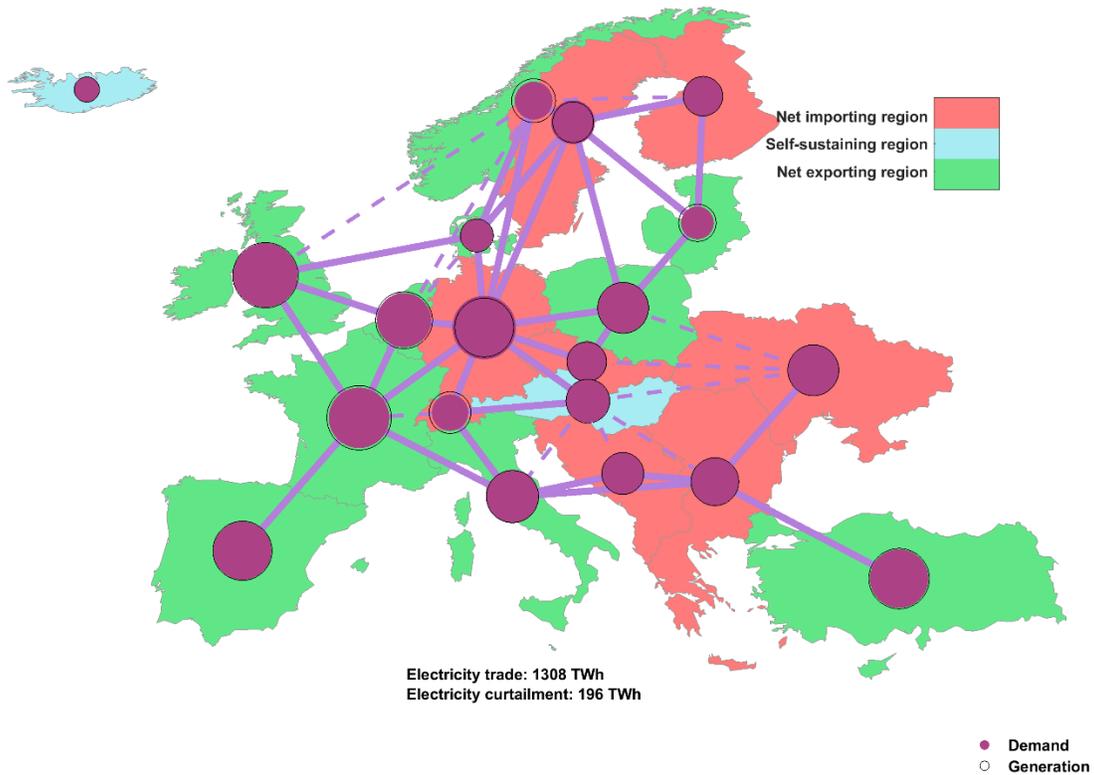


Figure C2.25: Regional electricity trade with net-importers and net-exporters in 2050 across Europe. Solid and dashed lines indicate used and not used interconnections, respectively (RES-2040).

The RES-2040 scenario results in a completely coupled energy system in 2040, which is largely based on renewable electricity and further develops to 2050, as shown in Figure C2.26. The energy system in the RES-2040 scenario is almost completely sector coupled and has plenty of flexibility options, in batteries for short-term storage, gas storage for seasonal variations and a mix of power-to-heat, power-to-gas, power-to-fuels and power-to-chemicals. The power, heat, transport and industry sectors have diversified energy sources.

EU - RES-2040 2050

Solar PV fixed tilted: 2943,2
 Solar PV single-axis: 587,2
 Solar PV prosumers: 711,9
 Wind Onshore: 2017,5
 Wind Offshore: 1083,5
 Wave: 185,5
 Hydro RoR: 125,3
 Hydro Dam: 81,9
 CSP: 0,1
 Geothermal: 9,2

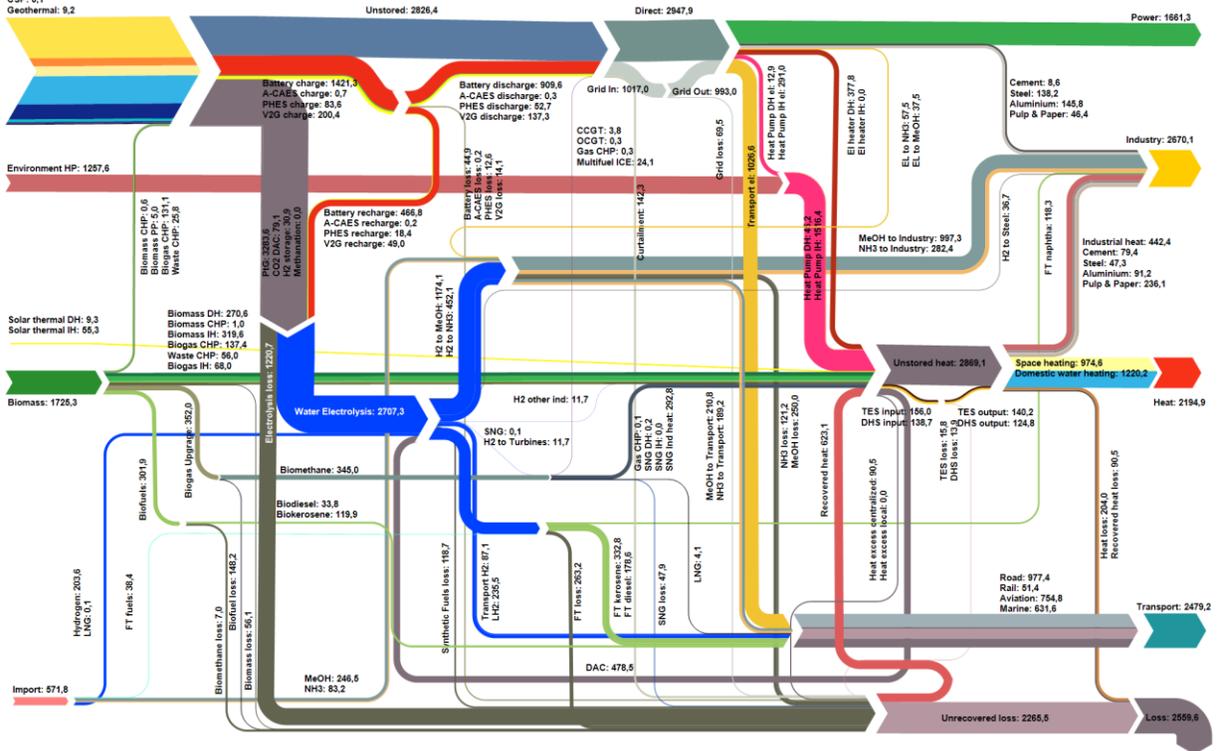


Figure C2.26: Energy flows of the EU energy system in 2050 (RES-2040).

C3. RES-2035 Scenario

Energy Demand

In the RES-2035 scenario, the uptake of renewables is relatively faster as compared to the other scenarios, which also influences the change in resource efficiency through rapid electrification. Efficiency measures such as improving building renovation rates, modal shift of transport towards electrified rail use and more conscious use of energy enable further gains in final and, consequently, primary energy. This eventually determines the levels of primary energy demand as shown in Figure C3.1.


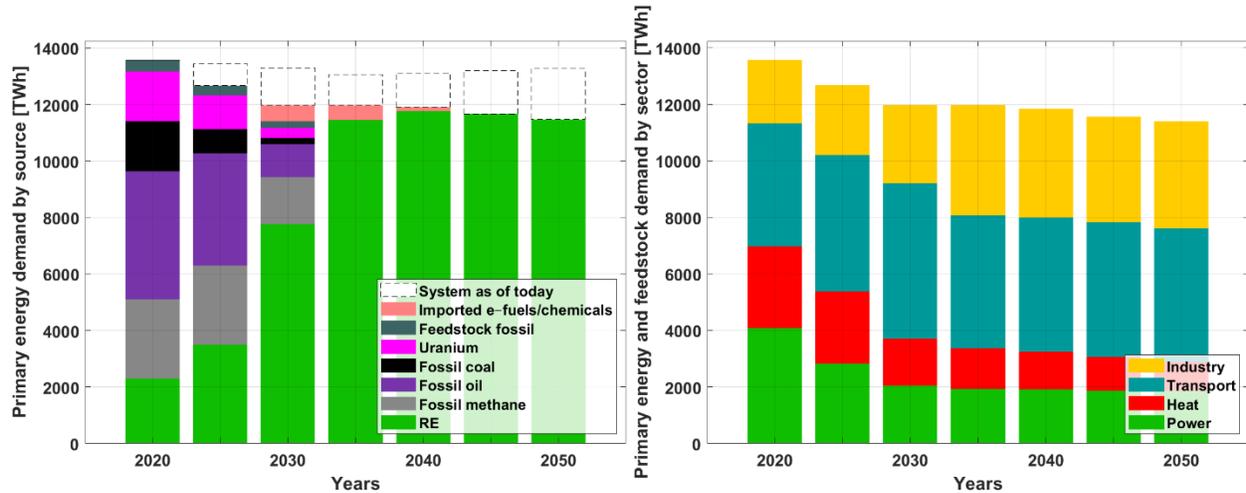


Figure C3.1: Primary energy demand according to sources (left) and on a sectoral basis (right), during the energy transition from 2020 to 2050 across the EU (RES-2035).

The primary energy demand decreases from over 13,750 TWh in 2020 to around 11,500 TWh by 2050 across the EU as shown in Figure C3.1. The gain in efficiencies compared to the ‘system as of today’ is due to electrification of the heat, transport and industry sectors, while the growth in demand for energy services continues. The final energy declines from about 11,000 TWh in 2020 to just under 10,000 TWh in 2050, despite a high level of energy services, with peak in 2035 mainly for the production of e-fuels as shown in Figure C3.2. The different fuels that constitute the final energy demand¹ transition from mostly fossil fuels in 2020 to renewable electricity, heat, e-fuels and e-chemicals by 2035.

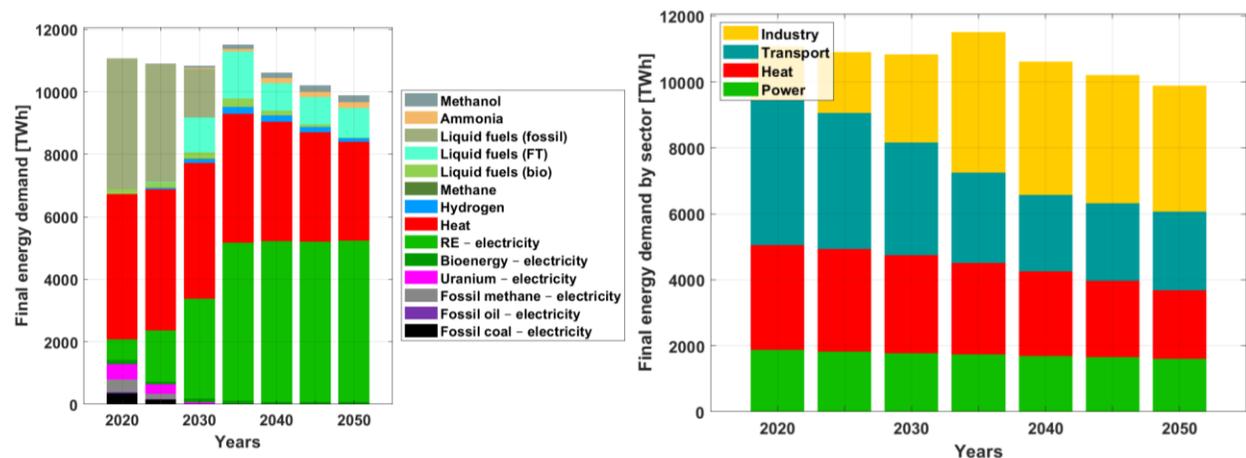

¹ Including the ambient heat for heat pumps

Figure C3.2: Final energy demand¹ according to sources (left) and on a sectoral basis (right), during the energy transition from 2020 to 2050 across the EU (RES-2035).

Sectoral Outlook

Energy supply is mainly through electricity and heat, as accelerated levels of electrification are achieved through the transition. An increasing amount of electricity generation is needed along with heat, storage and supply of fuels and chemicals and to cover the future energy demand.

Electricity

The electricity generation capacity across the EU satisfies demand from all energy sectors including power, heat, transport and industry. The total installed capacity grows massively from about 750 GW in 2020 to over 6000 GW by 2050 as shown in Figure C3.3. In the initial period of the transition, a larger share of wind power capacities is installed up to 2030, but in the later part of the transition solar PV dominates the shares of installed capacities reaching over 4500 GW by 2050. On the other hand, the shares of fossil fuels and nuclear power decline through the transition, with complete phaseout by 2035.

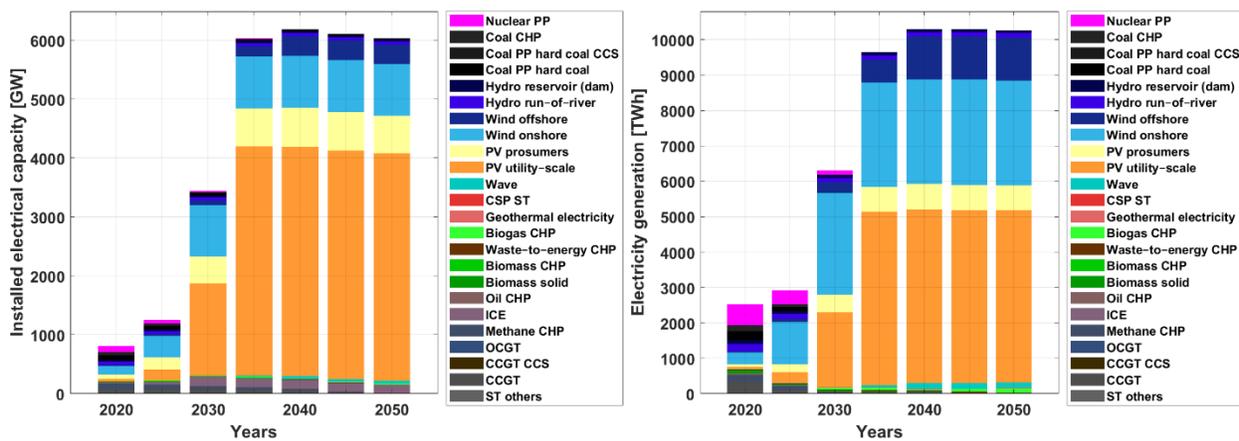


Figure C3.3: Technology-wise installed capacities (left) and technology-wise electricity generation (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

Electricity generation from the various technologies to cover the demand of power, heat, transport and industry sectors is shown in Figure C3.3. Solar PV supply increases through the transition along with wind power, wave power and electricity from waste and residual biomass up to 2050.

Heat

In the heat sector, heat pumps, electric heating, and biomass-based heating constitute the majority of installed capacity by 2050, also shown in Figure C3.4. A decrease in total installed capacity of heating technologies occurs mainly due to efficiency gains with heat pumps and electric heating, as fossil fuels recede from the energy system. The key driver is the increase in building renovation rate to four times the current rate and linear increase of industrial heat efficiency to 3% per annum until 2030. Heat pumps play a significant role through the transition with a share of over 50% of heat generation by 2050 on both the district and individual levels, as indicated in Figure C3.4. On the other hand, fossil gas-based heating decreases through the transition from over 75% in 2020, to almost zero by 2050. Moreover, fossil fuels

¹ Including the ambient heat for heat pumps

based heat generation declines through the transition period as coal-based combined heat and power (CHP) and district heating (DH) are replaced by heat generation from heat pumps, waste-to-energy CHP, biomass-based DH, and individual heating (IH).

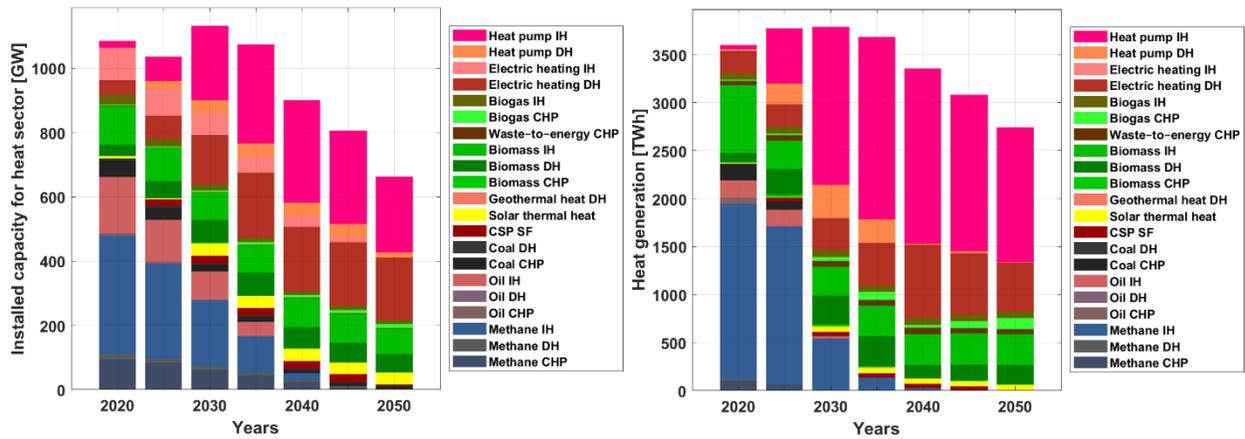


Figure C3.4: Technology-wise heat generation capacities (left) and technology-wise heat generation (right) during the energy transition from 2025 to 2050 across the EU (RES-2035).

Electricity, Heat and Gas Storage

Energy storage technologies play a critical role in enabling a secure energy supply across the EU, fully based on renewable energy across different sectors. The installed electricity storage capacity increases from just 0.4 TWh in 2020 to nearly 5 TWh by 2050, as shown in Figure C3.5. Utility-scale and prosumer batteries with major shares of vehicle-to-grid dominate, some PHES remains through the transition. Utility-scale and prosumer batteries contribute a major share of the electricity storage output with hydrogen and methane based output contributing beyond 2035, as highlighted by Figure C3.5. In addition, vehicle-to-grid, PHES contributes some shares through the transition.

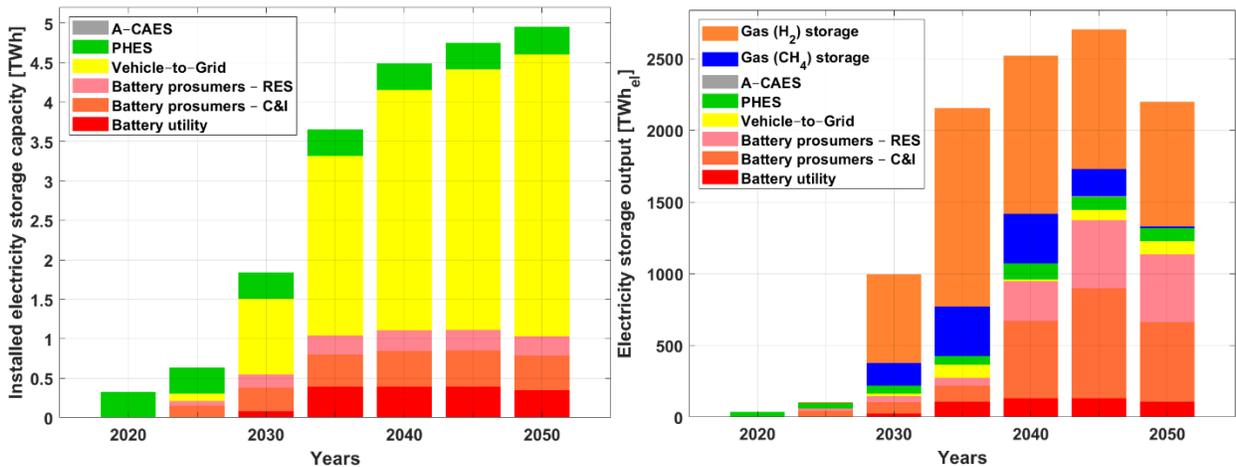


Figure C3.5: Installed electricity storage capacities (left) and electricity storage output (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

Heat storage plays a vital role in ensuring that the heat demand is covered in all sectors. The installed heat storage grows substantially from 2030 onwards, installed capacities are dominated by gas storage (hydrogen and methane), as shown in Figure C3.6. This substantial capacity addition is mainly to provide seasonal storage across the EU covering the heat demand in the absence of fossil fuels. The present fossil gas storage

capacity across the EU is around 1000 TWh⁵⁴, a doubling of this gas storage would be needed for an integrated energy system by 2035. Thermal energy storage emerges with heat storage output from 2030 until 2050, as shown in Figure C3.6. Hydrogen gas storage contributes a majority of the heat storage output from 2035 to 2050 along with some shares of biomethane, covering predominantly the seasonal demand, which is covered by fossil gas before 2030.

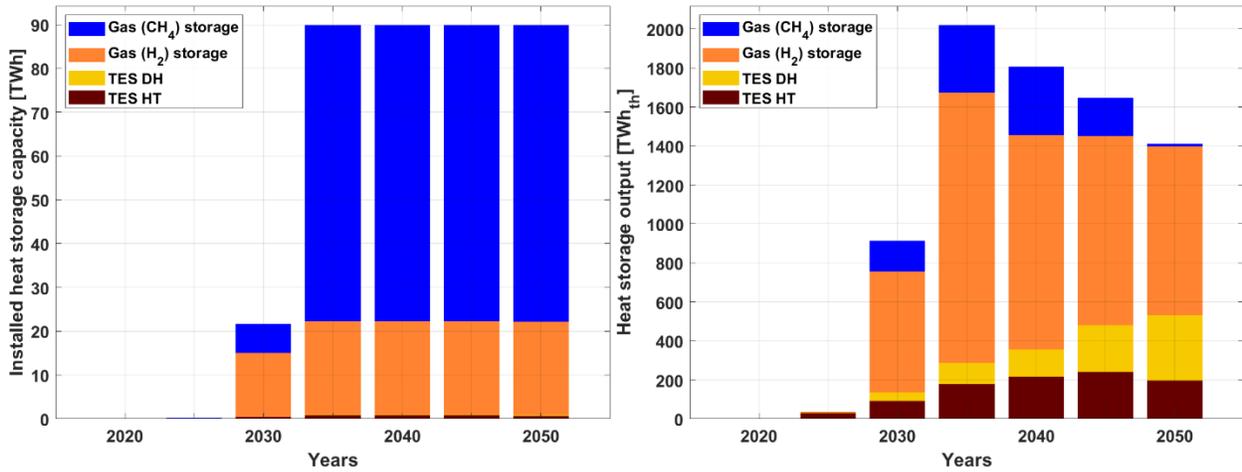


Figure C3.6: Heat storage installed capacities (left) and heat storage output (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

Transport and Industry

The final energy demand of the transport sector across the EU is almost twice the energy demand from the power sector at around 4400 TWh in 2020. However, this demand declines through the transition to around 2000 TWh by 2050, as shown in Figure C3.7. This is achieved mainly due to efficiency gains brought about by electrification of the sector, mainly road transport. On the other hand, the energy and feedstock demand for the industry sector grows through the transition driven by production of sustainable chemicals and fuels, as shown in Figure C3.7.

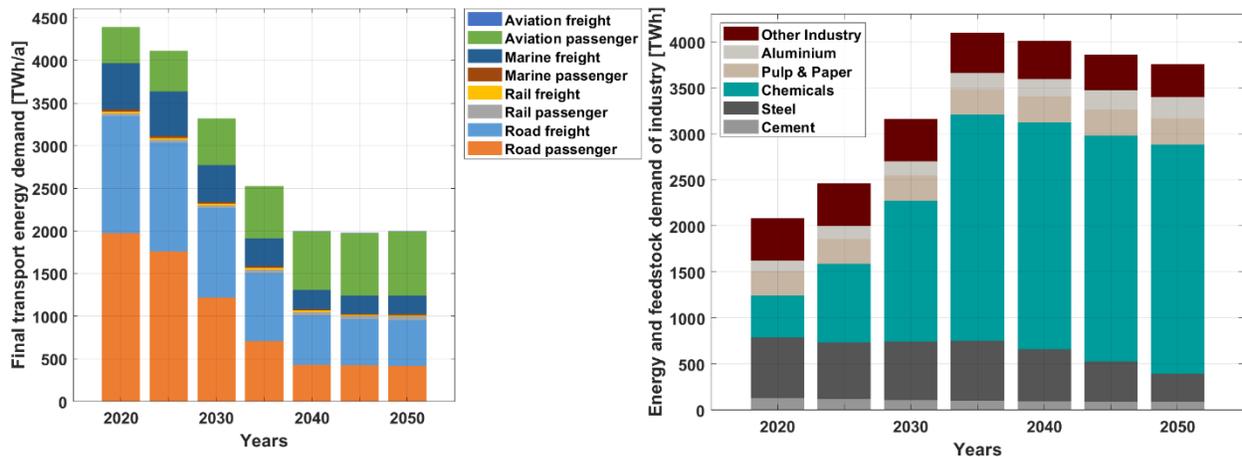


Figure C3.7: Final energy demand for transport (left) and energy and feedstock demand¹ for various industries (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

¹ Including the ambient heat for heat pumps

The road transport energy demand declines through the transition with massive gains from high levels of direct electrification, whereas the final energy demand increases for aviation in the last few years, not only due to a continuous transportation demand, but also driven by increasing specific energy demand due to production of synthetic e-fuels. Energy demand for the rail mode remains fairly stable through the transition, as it already at a high level of electrification across the EU. The development of the final energy demand for the different transport modes through the transition is shown in Figure C3.7. The low efficiency of the present transport sector is highlighted by the projection of an about 80% increase in transportation demand, but declining final energy demand for the transport sector.

Electrification of Heat, Transport and Industry Sectors

The heat, transport and industry sectors undergo a significant transformation in the course of the energy transition, as high levels of electrification (direct and indirect) lead to higher demand for electricity and a rapid decline in demand for fossil fuels.

The share of electricity in the final energy demand for heat increases substantially with about 2100 TWh by 2050, while the share of fossil fuels in the final energy demand declines to zero by 2035 from nearly 2400 TWh in 2020, as shown in Figure C3.8.

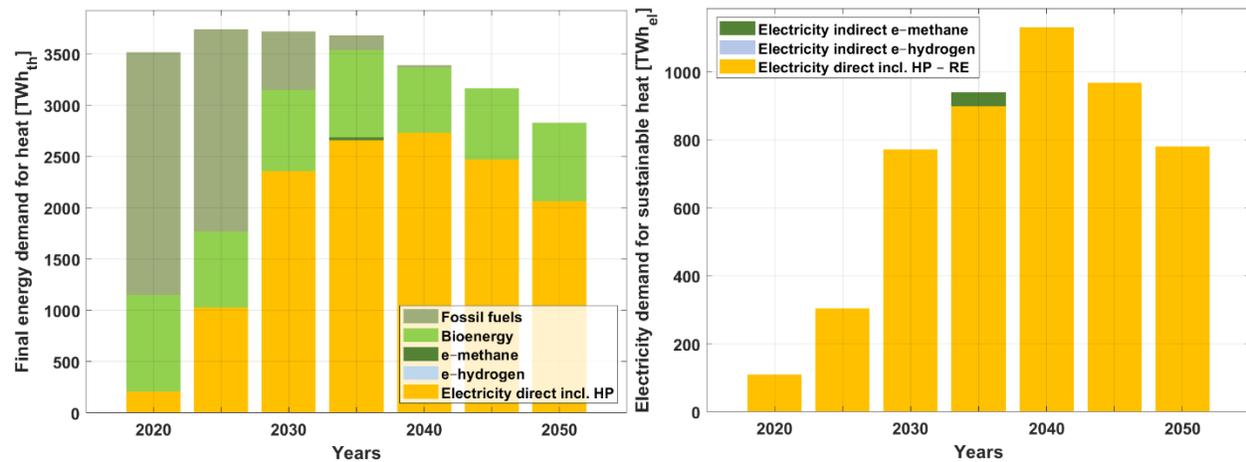


Figure C3.8: Final energy demand for heat¹ (left) and electricity demand for sustainable heat (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

Electricity demand to provide sustainable heat increases through the transition to around 780 TWh_{el} by 2050, with a peak of over 1100 TWh_{el} in 2040.

Fossil fuels consumption in the transport sector across the EU is seen to decline through the transition from about 95% in 2020 to zero by 2035. On the other hand, liquid fuels produced by renewable electricity contribute around 30% of final energy demand in 2050. In addition, hydrogen constitutes around 15% of final energy demand in 2050 along with e-methanol and e-ammonia, as shown in Figure C3.9. Sustainable biofuels from waste and residual biomass contribute some shares as part of renewable liquid fuels. Electrification of the transport sector creates an electricity demand of about 4200 TWh_{el} by 2050. In the initial periods demand is driven by electrification of road transport, while marine and aviation drive the electricity demand for e-fuels synthesis in 2030s and 2040s, as the massive demand for synthetic e-chemicals and liquid e-fuels kicks in from 2030 onwards up until 2050, as indicated in Figure C3.9.

¹ Including the ambient heat for heat pumps

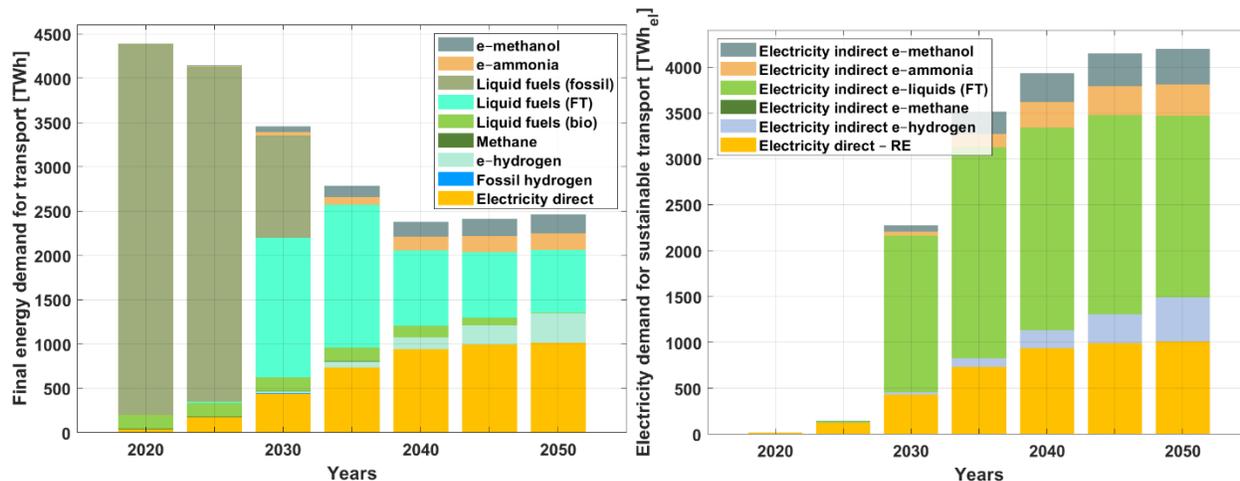


Figure C3.9: Final energy demand for transport (left) and electricity demand for sustainable transport (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

As renewable electricity use in the industry sector grows, fossil fuels are replaced by green e-hydrogen and other e-fuels and e-chemicals in 2035 and beyond, as shown in Figure C3.10. Electrification of the industry sector creates an electricity demand of about 2600 TWh_{el} by 2050. The massive demand for green e-hydrogen kicks in from 2030 onwards up until 2050, mainly for the production of sustainable e-chemicals, as indicated in Figure C3.10.

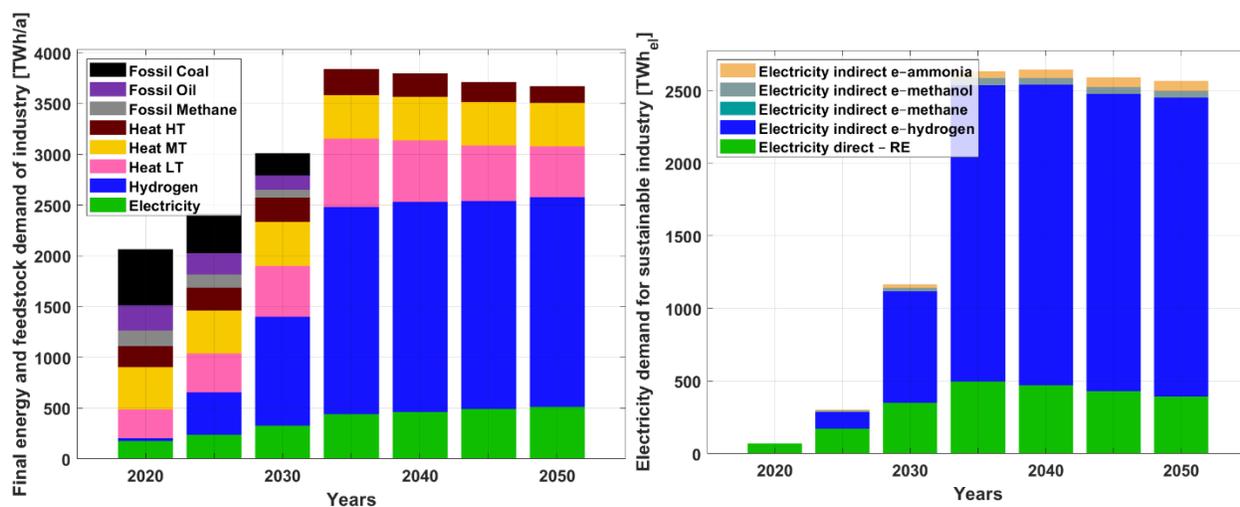


Figure C3.10: Energy and feedstock demand for industry¹ (left) and electricity demand for sustainable industry (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

Fuels, Chemicals and Carbon Supply

An essential aspect in the transition of the transport sector towards higher electrification completely based on high shares of renewable energy is the production of synthetic fuels and chemicals: e-hydrogen, e-methane, Fischer-Tropsch fuels, e-methanol and e-ammonia. As indicated in Figure C3.11, fossil fuels are completely replaced by a combination of sustainable fuels and chemicals by 2035. Additionally, CO₂ direct air capture, which is vital in the production of synthetic e-fuels, supplies up to over 600 MtCO₂ by 2050, as

¹ Including the ambient heat for heat pumps

shown in Figure C3.11. Some CO₂ buffer storage, which stores CO₂ from DAC systems to be utilised in the production of e-fuels and e-chemicals, complements CO₂ supply in the energy system.

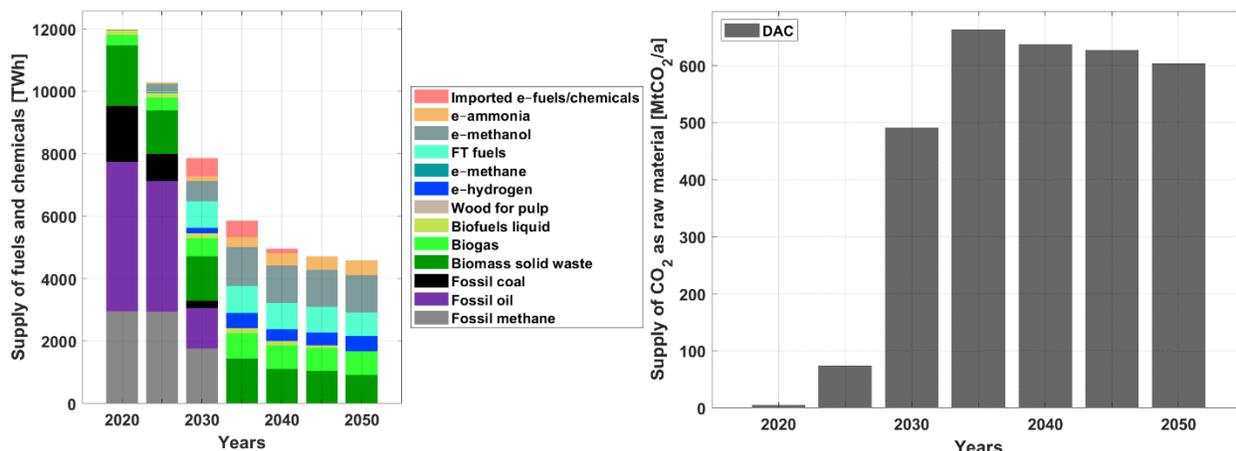


Figure C3.11: Supply of fuels and chemicals (left) and CO₂ as raw material (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

Costs and Investments

The total annual costs decline from about 720 b€ in 2030 to about 550 b€ in 2050 through the transition period and are well distributed across the major sectors of power, heat, transport and industry across the EU. As indicated in Figure C3.12, Capex increases through the transition, as fuel costs decline. The steady increase in Capex-related energy system costs indicate that fuel imports and the respective negative impacts on trade balances will fade out through the transition. In addition, a low fuel import dependency will lead to a higher level of energy security across the EU rapidly.

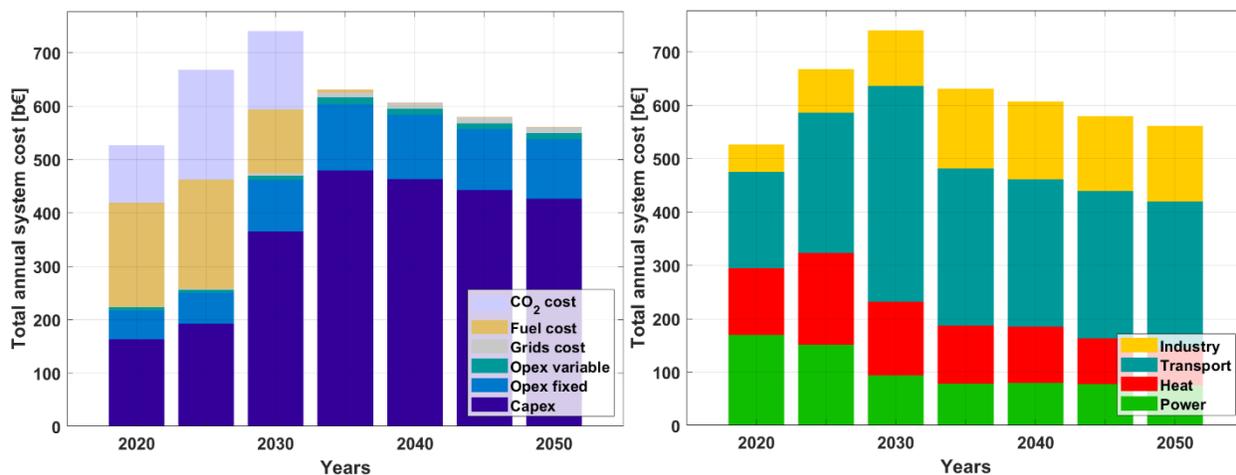


Figure C3.12: Annual energy system costs composed of different parameters (left) and of different sectors (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

As increasing shares of power generation capacities are added globally, renewable energy sources on a levelised cost of energy basis become the lowest cost power generation source⁵⁵. As indicated in Figure C3.13, levelised cost of energy remains stable at around 62 €/MWh by 2050 and is increasingly dominated by capital costs as fuel costs continue to phase out through the transition period, which could mean increased self-reliance in terms of energy for the EU by 2035. Capital costs are well spread across a range of

technologies with major investments for solar PV, wind power, batteries, heat pumps, and synthetic e-fuel and e-chemicals conversion technologies up to 2050, as shown in Figure C3.13.

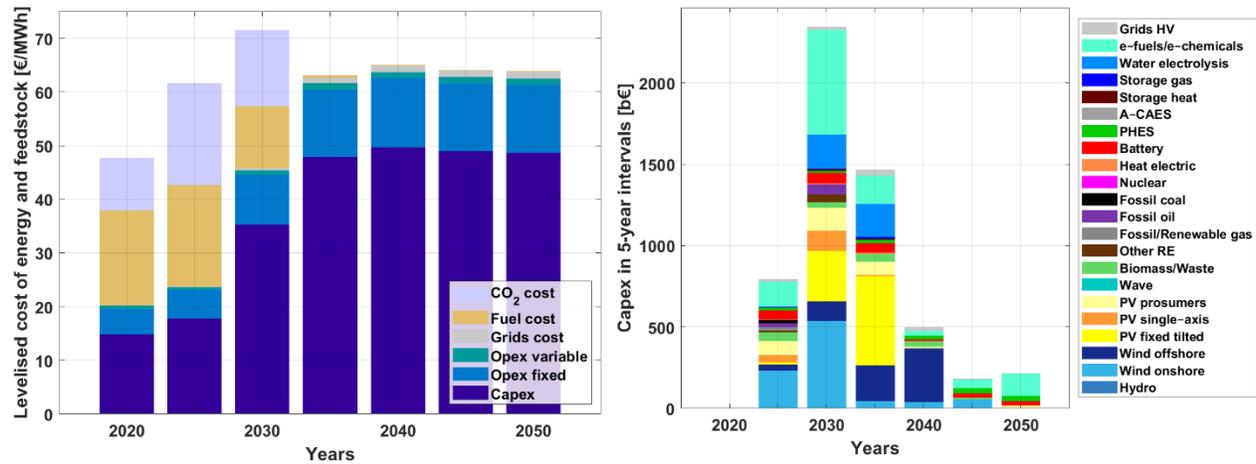


Figure C3.13: Levelised cost of energy (left) and capital expenditures in five-year intervals (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

Capital expenditures are well spread across a range of power generation technologies with the majority share in wind power up to 2030, beyond which solar PV dominates investments up to 2035, as shown in Figure C3.14. The LCOE of the power sector decreases substantially from around 84 €/MWh in 2020 to around 41 €/MWh by 2050, as shown in Figure C3.14. LCOE is predominantly comprised of Capex as fuel costs decline through the transition.

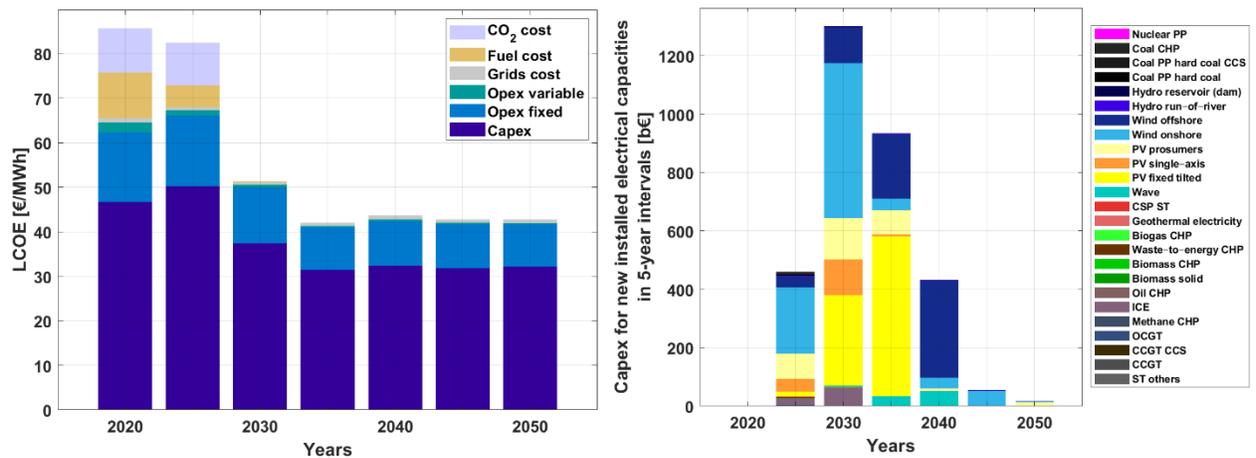


Figure C3.14: Levelised cost of electricity (left) and capital expenditures for electricity generation in five-year intervals (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

Investments in the heat sector are mainly in heat pumps and some shares in biomass heating up to 2050, also shown in Figure C3.15. The steep increase in heat pump investments in the initial five-year period and until 2050 is mainly to cover the heat demand in the absence of fossil fuels as well as the lower costs of heat pumps by 2050. The LCOH of the heat sector, after an initial increase, declines from about 50 €/MWh in 2025 to around 27 €/MWh by 2050, as shown in Figure C3.15. The LCOH is predominantly comprised of Capex as fuel costs decline through the transition. Rapid electrification and improvements in building renovation rates with efficiency gains enables the LCOH to decline in a stable manner up to 2050.

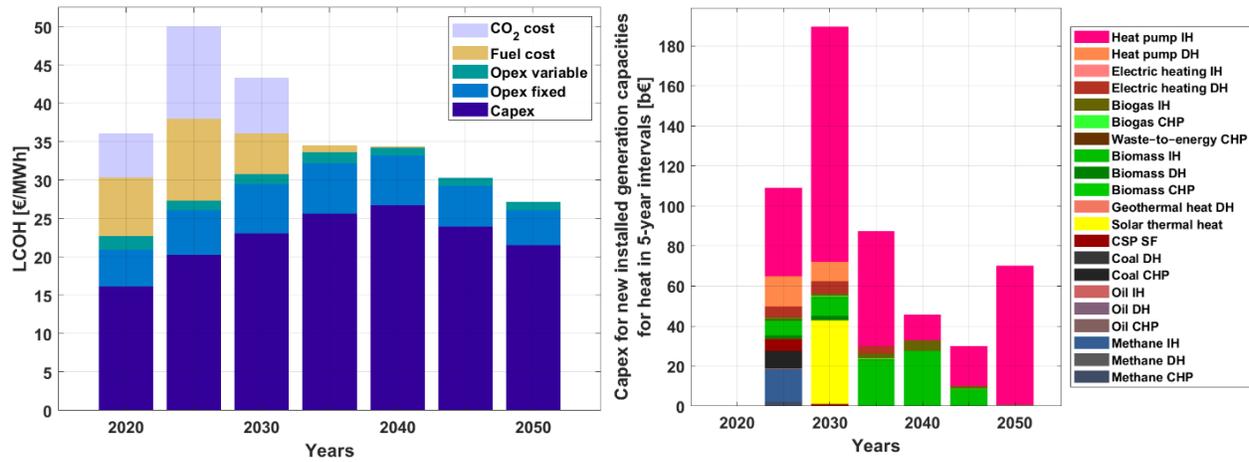


Figure C3.15: Levelised cost of heat (left) and capital expenditures for heat generation in five-year intervals (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

The total annual energy costs for transport after initial increase, decline to about 170 b€ by 2050, as shown in Figure C3.16. During the same period, passenger transportation services increase by more than 50% and freight services by 25%, while energy demand decreases. This is primarily due to efficiency gains through electrification of the sector resulting in lower annual system costs. Furthermore, annual system costs transit from being heavily dominated by fuel costs in 2020 to a very diverse share of costs across various technologies for electricity, synthetic e-fuels and sustainable biofuel production by 2035 and beyond. Similarly, the final energy cost of energy and feedstock for the industry sector after initial increase, declines to about 90 b€ by 2050, driven by process changes as shown in Figure C3.16.

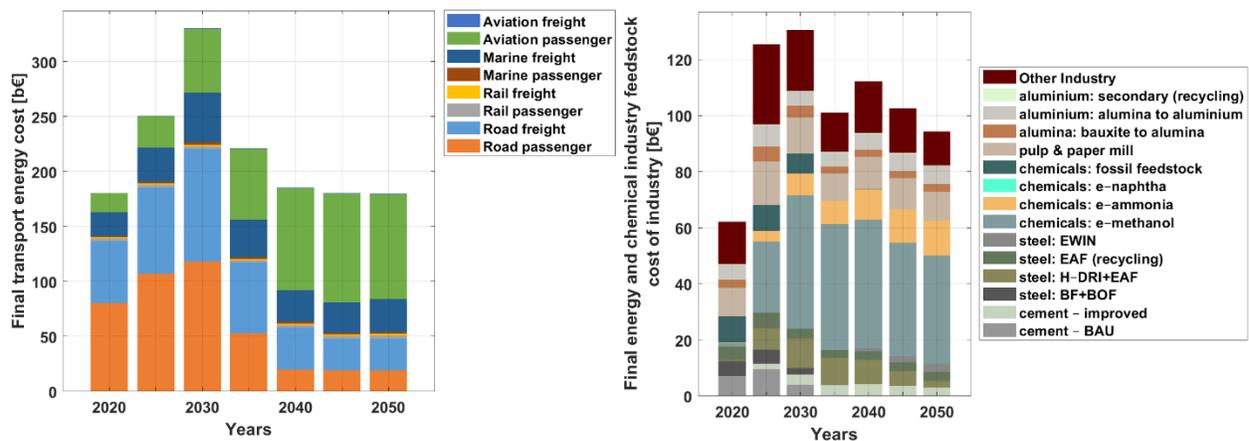


Figure C3.16: Final transport energy costs for different modes (left) and final energy and chemicals feedstock costs of different industries and processes (right) during the energy transition from 2020 to 2050 across the EU (RES-2035).

CO₂ Emissions

The results of the energy transition towards high shares of renewable energy indicate a sharp decline in CO₂ emissions, reaching almost zero by 2035, across the power, heat, transport and industry sectors across the EU as shown in Figure C3.18. The power and heat sectors undergo a deep defossilisation, whereas for the transport sector it is rather slow. In the industry sector, CO₂ emissions reduction are rather slow with some residual emissions from limestone use in the cement industry from 2035. However, this emission is mitigated through natural climate or capture and storage solutions.

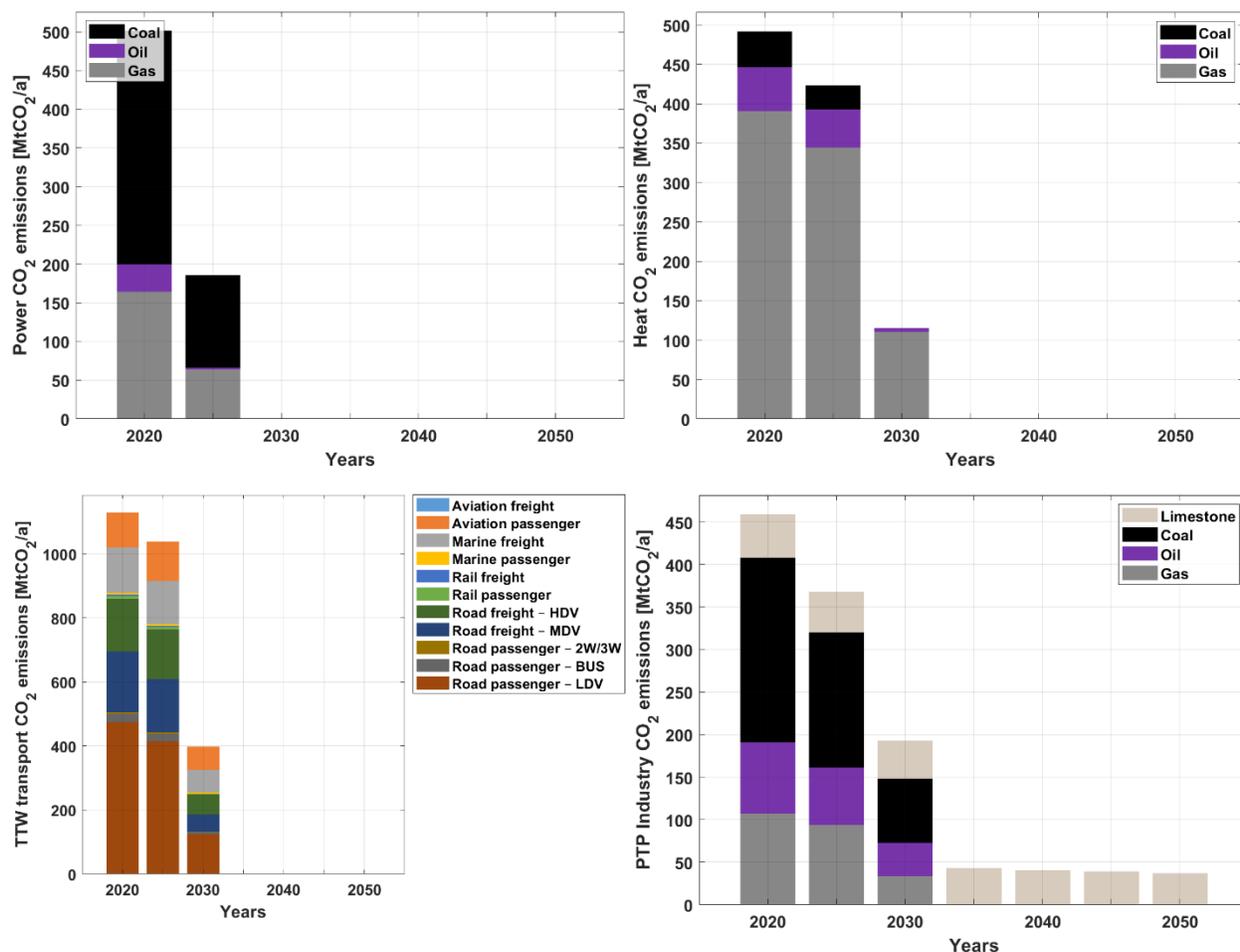



Figure C3.17: CO₂ emissions in the power sector from different fuels (top left), CO₂ emissions in the heat sector from different fuels (top right), CO₂ emissions in the transport sector from different modes (bottom left) and CO₂ emissions in the industry sector from different fuels (bottom right), during the energy transition from 2020 to 2050 across the EU. Tank to Wheel (TTW) and Plant to Product (PTP) considers CO₂ emissions from readily available fuels and does not consider CO₂ emissions from the upstream production and delivery of fuels (RES-2035).

CO₂ emissions from the power sector decline through the transition from around 500 MtCO₂/a in 2020 to zero by 2030 as shown in Figure C3.17. Similarly, CO₂ emissions from the heat sector decline through the transition from over 480 MtCO₂/a in 2020 to zero by 2035 as shown in Figure C3.17. CO₂ emissions from the transport sector decline through the transition from around 1100 MtCO₂/a in 2020 to zero by 2035 and CO₂ emissions from the industry sector decline through the transition from over 450 MtCO₂/a in 2020 to nearly zero by 2035, with some residual emissions from limestone, as shown in Figure C3.17.

Regional Outlook

The regional distribution of electricity generation capacities, electricity generation, heat generation capacities, heat generation, electricity storage output, heat storage output, supply of fuels and chemicals across the EU, and electricity exchange across the European network are illustrated in the Figures C3.18 to C3.25. Further information during the different years of the transition for the 27 EU member states is provided in a supplementary data file.

Power generation capacities are distributed throughout the EU, with major shares of solar PV in the Southern member states, while wind power has major shares in the northern and western members states of the EU in 2050 (see Figure C3.18). PV prosumers are a relevant energy system feature in all member states. The total power generation capacity installed across the EU in the RES-2035 scenario in 2050 is 6035 GW.

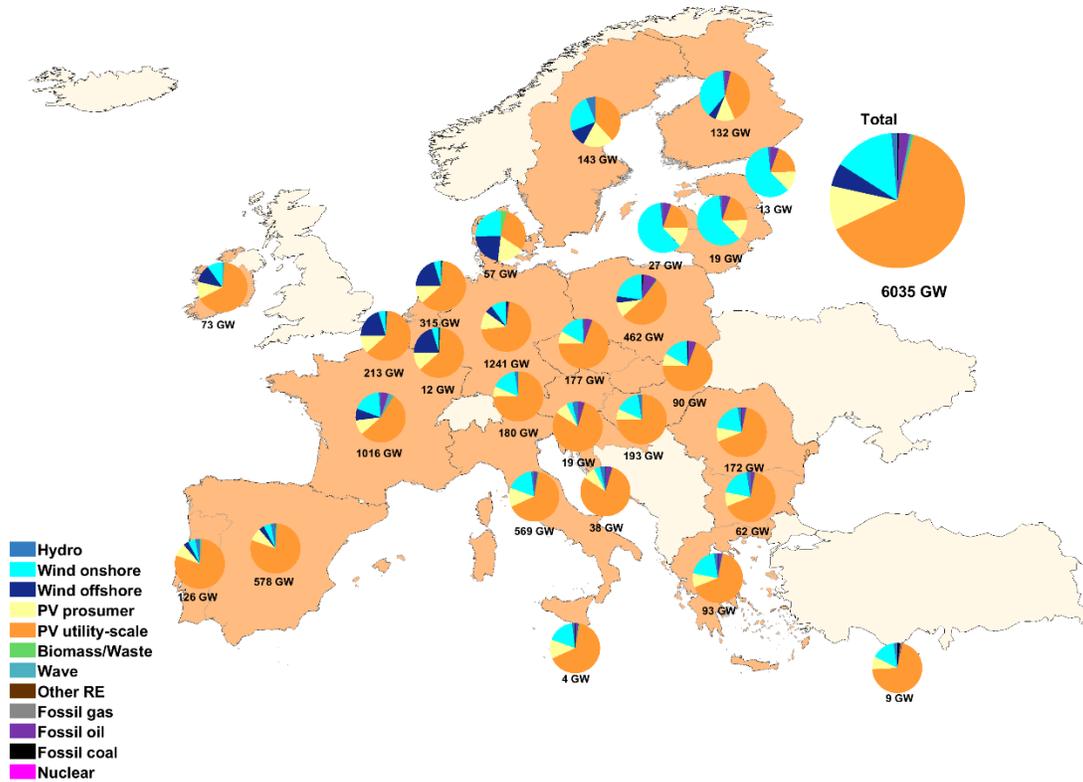

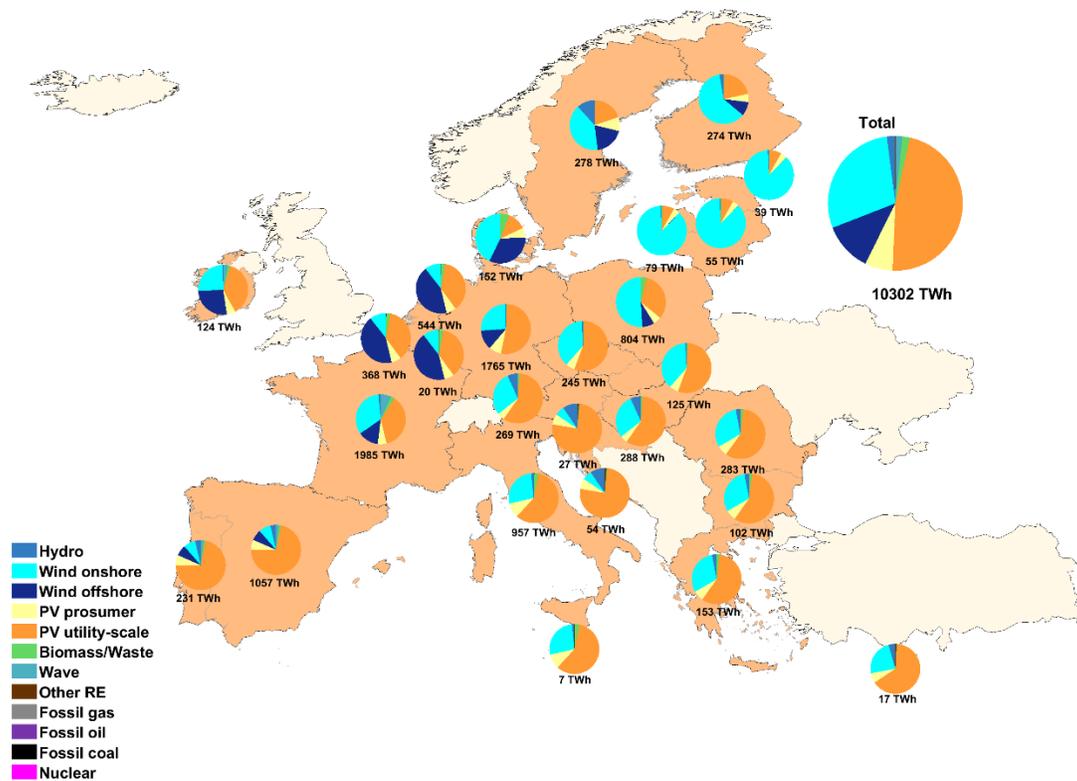


Figure C3.19: Regional electricity supply in 2050 across the EU (RES-2035).

Heat generation capacities are about 633 GW across the EU in the REE-2035 scenario in 2050 and well distributed across the member states. Heat pumps and electric heating are the major heat sources in 2050 and are predominant in the southern and western member states. While higher shares of bioenergy provide heat in the northern and Baltic states along with minor shares across the rest of the EU (see Figure C3.20).

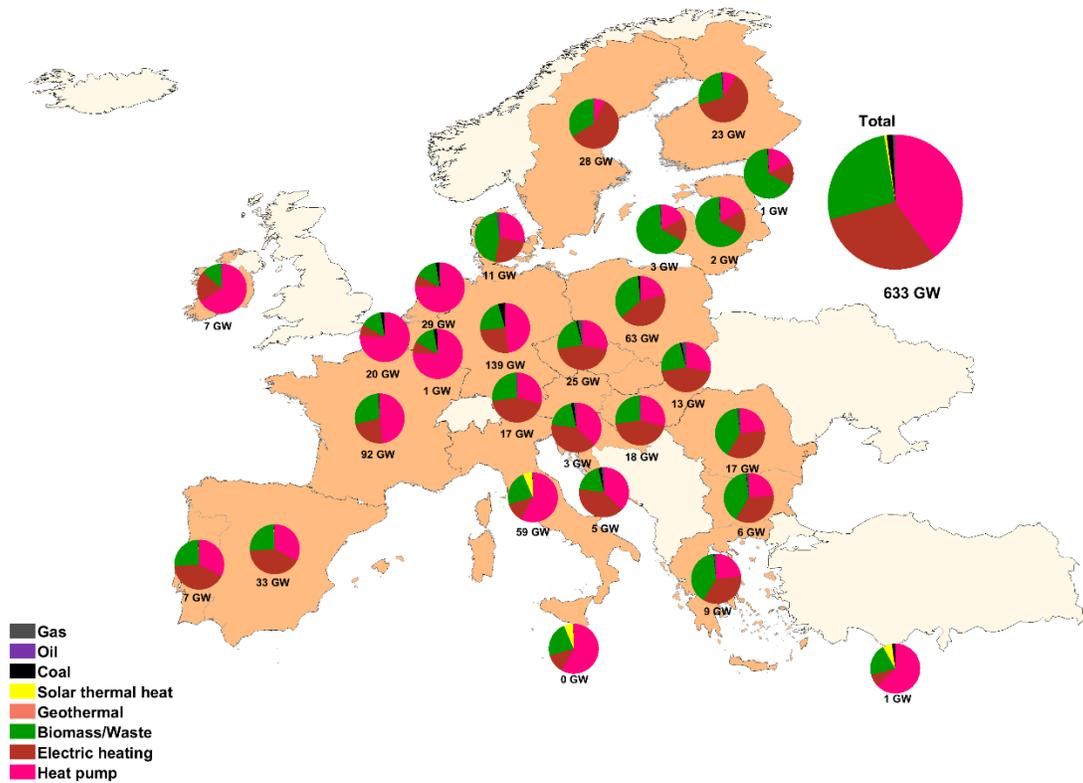


Figure C3.20: Regional heat generation capacities in 2050 across the EU (RES-2035).

Total heat generation across the EU is 2690 TWh in the RES-2035 scenario in 2050. Major share is from heat pumps and electric heating across most states, while bioenergy contributes most of the heating in the eastern and Baltic states of the EU (see Figure C3.21).

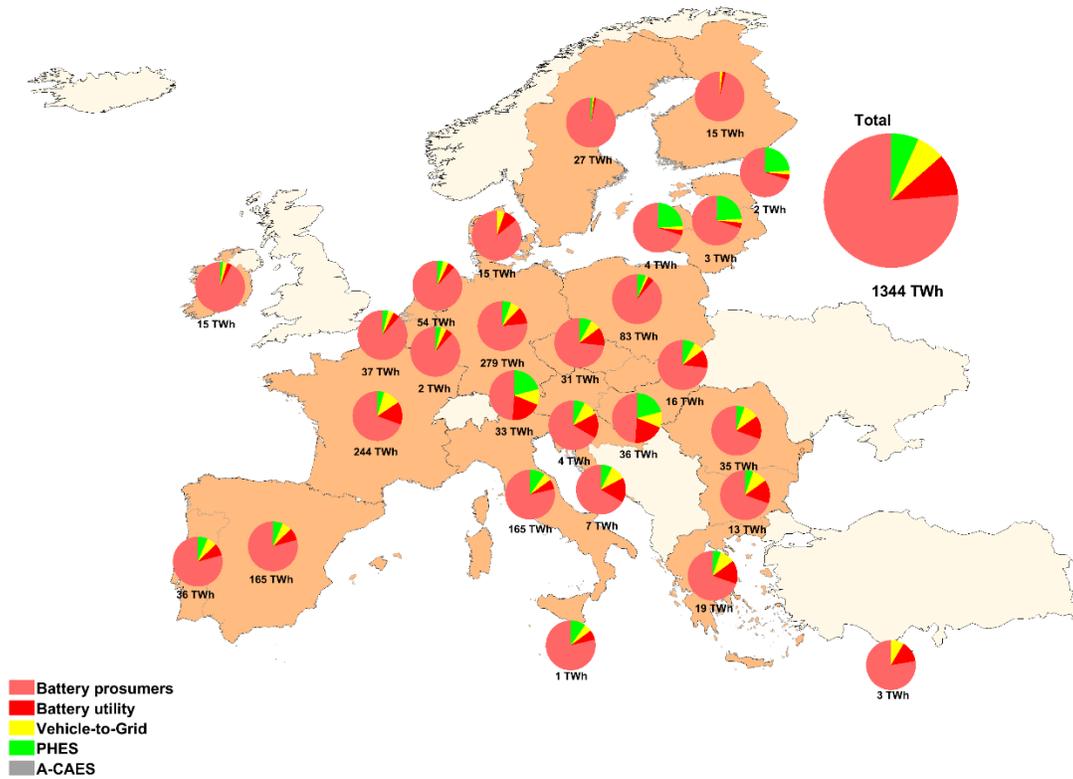


Figure C3.22: Regional electricity storage output in 2050 across the EU (RES-2035).

Heat storage output is 1412 TWh in 2050 across the EU in the RES-2035 scenario. It is well distributed across the member states and hydrogen storage provides the bulk of the heat across members states in 2050. While thermal energy storage provides major shares of the heat in some member states with high temperature heat. Some shares of biomethane storage output contribute across the EU for seasonal heat (see Figure C3.23).

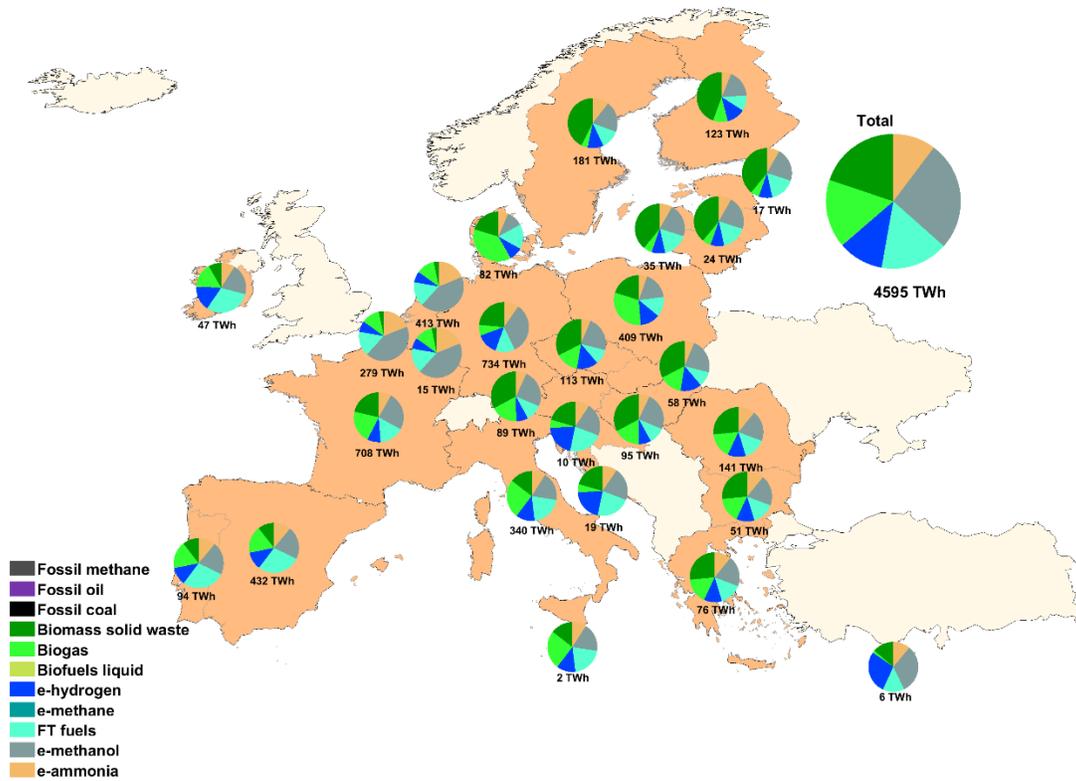


Figure C3.24: Regional fuels and chemicals supply in 2050 across the EU (RES-2035).

The electricity network is robust and rapidly developing across the EU and beyond covering Europe. With energy resources distributed across the region, electricity trade is 1342 TWh in 2050 across Europe in the RES-2035 scenario (see Figure C3.25), representing 13% of total electricity generation in EU. Net exporters and importers emerge across Europe to enable a cost optimal energy mix for the whole region.

Annual imported and exported electricity

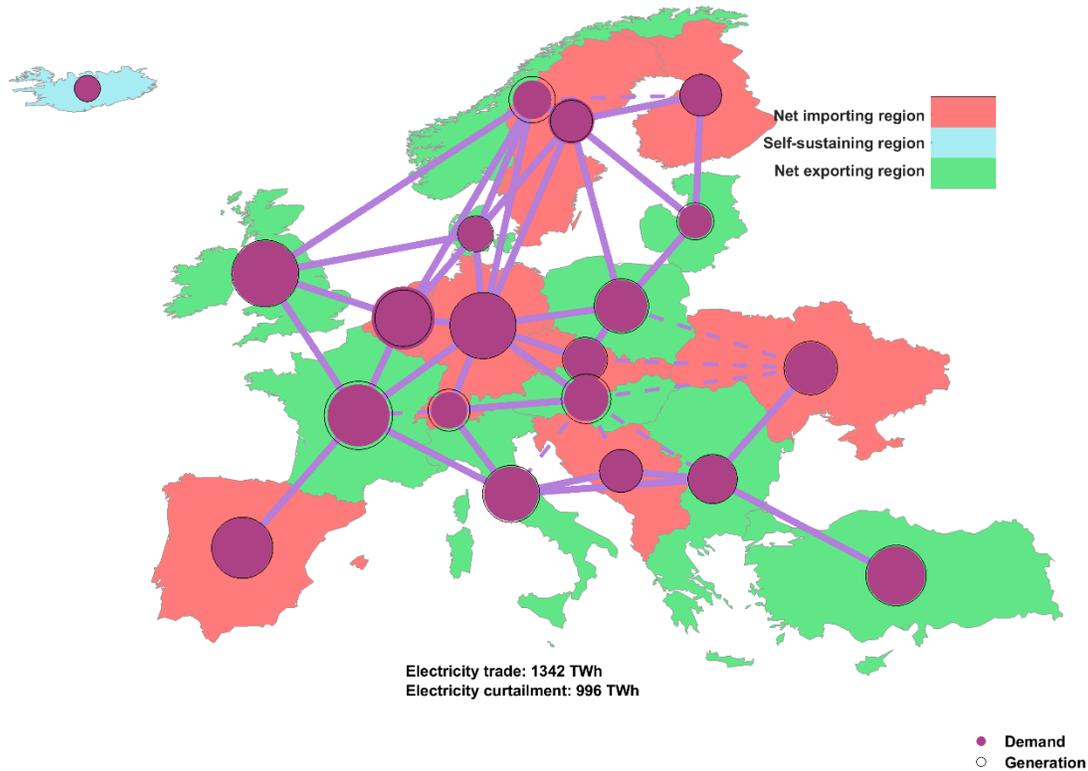


Figure C3.25: Regional electricity trade with net-importers and net-exporters in 2050 across Europe. Solid and dashed lines indicate used and not used interconnections, respectively (RES-2035).

The RES-2035 scenario results in a completely sector coupled and integrated energy system in 2035 and develops further until 2050, as shown in Figure C3.26. The energy system in the RES-2035 scenario has highly diversified and self-reliant power, heat and transport sectors across the EU, as shown in Figure C3.26.

EU - RES-2035 2050

Solar PV fixed tilted: 4101,7
 Solar PV single-axis: 781,3
 Solar PV prosumers: 688,1
 Wind Onshore: 2375,0
 Wind Offshore: 1210,2
 Wave: 181,2
 Hydro RoR: 125,3
 Hydro Dam: 84,7
 CSP: 0,1
 Geothermal: 12,3

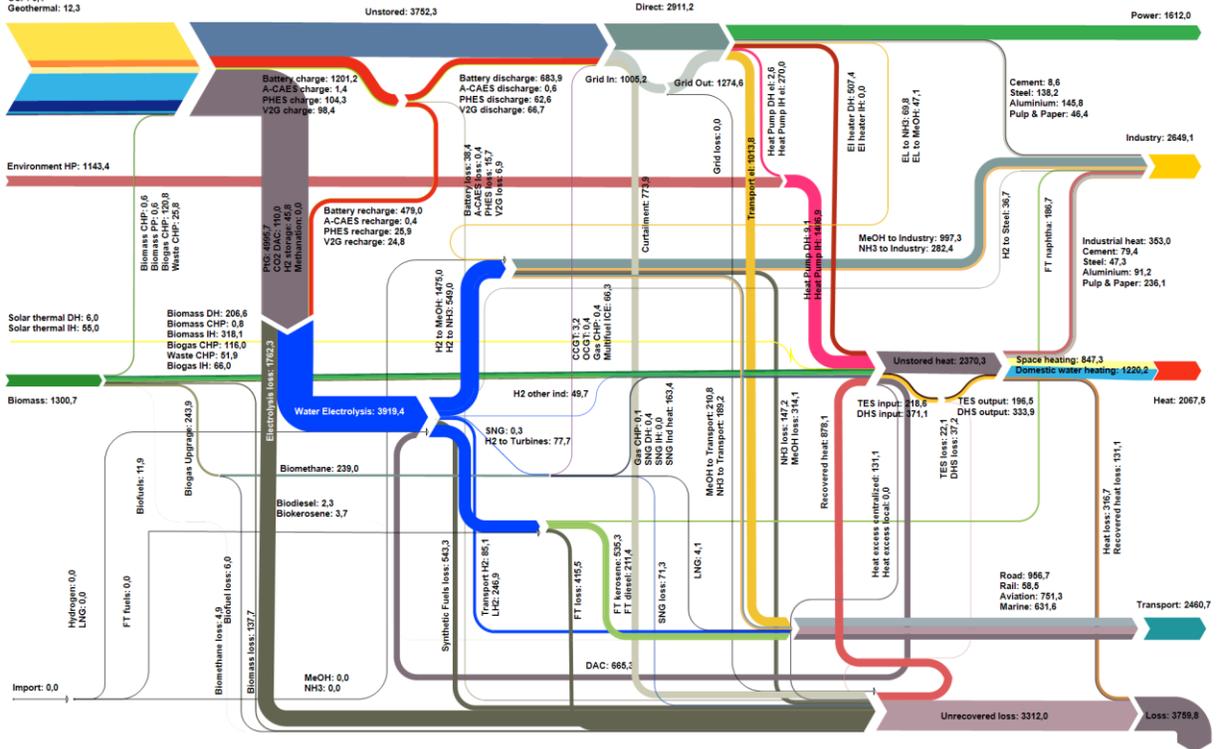


Figure C3.26: Energy flows of the EU energy system in 2050 (RES-2035).

References

1. Bogdanov D, Farfan J, Sadovskaia K, Aghahosseini A, Child M, Gulagi A, Oyewo AS, de Souza Noel Simas Barbosa L, Breyer C. Radical transformation pathway towards sustainable electricity via evolutionary steps. *Nat Commun.* 2019;10(1):1077. doi:10.1038/s41467-019-08855-1.
2. Bogdanov D, Ram M, Aghahosseini A, Gulagi A, Oyewo AS, Child M, Caldera U, Sadovskaia K, Farfan J, De Souza Noel Simas Barbosa L, et al. Low-cost renewable electricity as the key driver of the global energy transition towards sustainability. *Energy.* 2021;227:120467. doi:10.1016/j.energy.2021.120467.
3. Bogdanov D, Gulagi A, Fasihi M, Breyer C. Full energy sector transition towards 100% renewable energy supply: Integrating power, heat, transport and industry sectors including desalination. *Appl Energy.* 2021;283:116273. doi:10.1016/j.apenergy.2020.116273.
4. Keiner D, Ram M, Barbosa LDSNS, Bogdanov D, Breyer C. Cost optimal self-consumption of PV prosumers with stationary batteries, heat pumps, thermal energy storage and electric vehicles across the world up to 2050. *Sol Energy.* 2019;185:406-423. doi:10.1016/j.solener.2019.04.081.
5. Khalili S, Rantanen E, Bogdanov D, Breyer C. Global Transportation Demand Development with Impacts on the Energy Demand and Greenhouse Gas Emissions in a Climate-Constrained World. *Energies.* 2019;12(20):3870. doi:10.3390/en12203870.
6. Sadovskaia K, Bogdanov D, Honkapuro S, Breyer C. Power transmission and distribution losses – A model based on available empirical data and future trends for all countries globally. *Int J Electr Power Energy Syst.* 2019;107:98-109. doi:10.1016/j.ijepes.2018.11.012.
7. Toktarova A, Gruber L, Hlusiak M, Bogdanov D, Breyer C. Long term load projection in high resolution for all countries globally. *Int J Electr Power Energy Syst.* 2019;111:160-181. doi:10.1016/j.ijepes.2019.03.055.
8. Keiner D, Barbosa LDSNS, Bogdanov D, Aghahosseini A, Gulagi A, Oyewo S, Child M, Khalili S, Breyer C. Global-Local Heat Demand Development for the Energy Transition Time Frame Up to 2050. *Energies.* 2021;14(13):3814. doi:10.3390/en14133814.
9. Farfan J, Fasihi M, Breyer C. Trends in the global cement industry and opportunities for a long-term sustainable CCU potential for Power-to-X. *J Clean Prod.* 2019;217:821-835.
10. Otto A, Robinius M, Grube T, Schiebahn S, Praktiknjo A, Stolten D. Power-to-Steel: Reducing CO₂ through the Integration of Renewable Energy and Hydrogen into the German Steel Industry. *Energies.* 2017;10(4):451. doi:10.3390/en10040451.
11. Yuan B, Kongstein OE, Haarberg GM. Electrowinning of Iron in Aqueous Alkaline Solution Using a Rotating Cathode. *J Electrochem Soc.* 2009;156(2):D64. doi:10.1149/1.3039998.
12. Fasihi M, Efimova O, Breyer C. Techno-economic assessment of CO₂ direct air capture plants. *J Clean Prod.* 2019;224:957-980.
13. Kermeli K, ter Weer PH, Crijns-Graus W, Worrell E. Energy efficiency improvement and GHG abatement in the global production of primary aluminium. *Energy Effic.* 2015;8(4):629-666. doi:10.1007/s12053-014-9301-7.
14. Suhr M, Klein G, Kourti I, Rodrigo Gonzalo M, Giner Santonja G, Roudier S, Delgado Sancho L. *Best Available Techniques (BAT) Reference Document for the Production of Pulp, Paper and Board.* Luxembourg; 2015. doi:10.2791/370629.
15. Kangas P, Onarheim K, Hankalin V, Santos S. Carbon capture from integrated pulp and board mill. In: *19th Conference on Process Integration, Modelling, and Optimisation for Energy Savings*

- & *Emission Reduction*. Prague; 2016. <https://cris.vtt.fi/en/publications/carbon-capture-from-integrated-pulp-and-board-mill>. Accessed August 24, 2020.
16. Eurostat. *Energy Data*. Luxembourg; 2021. doi:10.2785/68334.
 17. Bogdanov D, Breyer C. North-East Asian Super Grid for 100% renewable energy supply: Optimal mix of energy technologies for electricity, gas and heat supply options. *Energy Convers Manag*. 2016;112:176-190. doi:10.1016/j.enconman.2016.01.019.
 18. Afanasyeva S, Bogdanov D, Breyer C. Relevance of PV with Single-Axis Tracking for Energy Scenarios. *Sol Energy*. 2018;173:173-191.
 19. Verzano K. Climate Change Impacts on Flood Related Hydrological Processes: Further Development and Application of a Global Scale Hydrological Model. 2009. doi:10.17617/2.993926.
 20. Bunzel K, Zeller V, Buchhorn M, Griem F, Thrän D. *Regionale Und Globale Räumliche Verteilung von Biomassepotenzialen*. Leipzig; 2009.
 21. Aghahosseini A, Breyer C. From hot rock to useful energy: A global estimate of enhanced geothermal systems potential. *Appl Energy*. 2020;279:115769. doi:10.1016/j.apenergy.2020.115769.
 22. ETIP-PV. *The True Competitiveness of Solar PV. A European Case Study*. Munich.; 2017. <https://goo.gl/FBzSJx>.
 23. SolarPower Europe and LUT University. *100% Renewable Europe: How To Make Europe's Energy System Climate-Neutral Before 2050*. Brussels and Lappeenranta; 2020. <https://bit.ly/3jggJvY>.
 24. Vartiainen E, Masson G, Breyer C, Moser D, Román Medina E. Impact of weighted average cost of capital, capital expenditure, and other parameters on future utility-scale PV levelised cost of electricity. *Prog Photovoltaics Res Appl*. 2020;28(6):439-453. doi:10.1002/pip.3189.
 25. Mann S, de Wild-Scholten M, Fthenakis V, van Sark W, Sinke W. The energy payback time of advanced crystalline silicon PV modules in 2020: a prospective study. *Prog Photovolt Res Appl*. 2014;22:1180-1194. doi:10.1002/pip.2363.
 26. Bolinger M, Seel J, Hamachi LaCommare K. *Utility-Scale Solar 2016: An Empirical Analysis of Project Cost, Performance, and Pricing Trends in the United States*, Lawrence Berkeley National Laboratory. Berkley; 2017. <https://emp.lbl.gov/sites/default/files/utility-scale-solar-2016-report.pdf>.
 27. Neij L. Cost development of future technologies for power generation — A study based on experience curves and complementary bottom-up assessments. *Energy Policy*. 2008;36(6):2200-2211. doi:10.1016/j.enpol.2008.02.029.
 28. [EC] - European Commission. *Technology Pathways in Decarbonisation Scenarios*. Brussels; 2018. https://ec.europa.eu/energy/sites/ener/files/documents/2018_06_27_technology_pathways_-_finalreportmain2.pdf.
 29. European Commission. Joint Research Centre. Institute for Energy and Transport., SERTIS. *Energy Technology Reference Indicator (ETRI) Projections for 2010-2050*. Petten.; 2014. <http://publications.jrc.ec.europa.eu/repository/handle/JRC92496>. Accessed October 25, 2017.
 30. Sigfússon B, Uihlein A. *2015 JRC Geothermal Energy Status Report. European Commission - Joint Research Centre*. Petten; 2015. doi:10.2790/959587.

31. Ram M, Bogdanov D, Aghahosseini A, Gulagi A, Oyewo AS, Child M, Caldera U, Sadovskaia K, Farfan J, Barbosa L, et al. *Global Energy System Based on 100 % Renewable Energy - Power, Heat, Transport and Desalination Sectors*. Lappeenranta, Berlin; 2019. doi:<https://bit.ly/2ZnZtPi>.
32. [IEA] - International Energy Agency. *World Energy Outlook*. Paris; 2015. www.iea.org/publications/freepublications/publication/WEO2015.pdf.
33. Urban W, Girod K, Lohmann H, Weidner E. *Fraunhofer Instituts. Technologien Und Kosten Der Biogasaufbereitung Und Einspeisung in Das Erdgasnetz. Ergebnisse Der Markterhebung 2007-2008*. Oberhausen: Fraunhofer UMSICHT; 2008. <http://publica.fraunhofer.de/dokumente/N-94887.html>. Accessed October 25, 2017.
34. [IEA] - International Energy Agency. *World Energy Model – Scenario Analysis of Future Energy Trends*. Paris; 2016. <https://www.iea.org/reports/world-energy-model>. Accessed March 30, 2020.
35. McDonald A, Schratzenholzer L. Learning rates for energy technologies. *Energy Policy*. 2001;29(4):255-261. doi:10.1016/S0301-4215(00)00122-1.
36. IEA and NEA. *Projected Costs of Generating Electricity 2015*. Paris: OECD; 2015. doi:10.1787/cost_electricity-2015-en.
37. Koomey J, Hultman NE. A reactor-level analysis of busbar costs for US nuclear plants, 1970-2005. *Energy Policy*. 2007;35(11):5630-5642. doi:10.1016/j.enpol.2007.06.005.
38. Agora Energiewende. *Stromspeicher in Der Energiewende*. Berlin; 2014. <https://www.agora-energiewende.de/en/topics/-agothem-/Produkt/produkt/61/Stromspeicher+in+der+Energiewende/>.
39. Haysom JE, Jafarieh O, Anis H, Hinzer K, Wright D. Learning curve analysis of concentrated photovoltaic systems. *Prog Photovoltaics Res Appl*. 2015;23(11):1678-1686. doi:10.1002/pip.2567.
40. Fasihi M, Weiss R, Savolainen J, Breyer C. Global potential of green ammonia based on hybrid PV-wind power plants. *Appl Energy*. 2021;294:116170. doi:10.1016/j.apenergy.2020.116170.
41. Breyer C, Tsupari E, Tikka V, Vainikka P. Power-to-gas as an emerging profitable business through creating an integrated value chain. *Energy Procedia*. 2015;73:182-189. doi:10.1016/j.egypro.2015.07.668.
42. Hoffmann W. Importance and evidence for cost effective electricity storage. In: *29th EU PVSEC*. Amsterdam, September 22-26; 2014.
43. Kutscher C, Mehos M, Turchi C, Glatzmaier G, Moss T. *Line-Focus Solar Power Plant Cost Reduction Plan. National Renewable Energy Laboratory (NREL)*. Vol NREL/TP-55. Golden; 2010.
44. Schwartz J. *Advanced Hydrogen Liquefaction Process, Praxair DOE Annual Merit Review Project ID PD018*. New York; 2011. https://www.hydrogen.energy.gov/pdfs/review11/pd018_schwartz_2011_p.pdf.
45. Ainscough C, Leachman J. *Improved Hydrogen Liquefaction through Heisenberg Vortex Separation of Para and Ortho-Hydrogen, NREL Annual Merit Review*. Golden; 2017. https://www.hydrogen.energy.gov/pdfs/review17/pd130_ainscough_2017_o.pdf.
46. Körner A. *Technology Roadmap Hydrogen and Fuel Cells – Technical Annex.*; 2015. <http://www.g20ys.org/upload/auto/1f393d1deb4e2f4faf8b62d217549369fbd24fce.pdf>.
47. [IEA] - International Energy Agency. *Technology Roadmap – Hydrogen and Fuel Cells*. Paris; 2015. <https://www.iea.org/reports/technology-roadmap-hydrogen-and-fuel-cells>.

48. Fasihi M, Breyer C. Synthetic Methanol and Dimethyl Ether Production based on Hybrid PV-Wind Power Plants. In: *11th International Renewable Energy Storage Conference (IRES 2017)*. Düsseldorf, March 14-16,; 2017. <http://bit.ly/2qvsLYf>.
49. Giuliano S, Puppe M, Schenk H, Hirsch T, Moser M, Fichter T, Kern J, Trieb F, Engelhard M, Hurler U, et al. *THERMVOLT – Systemvergleich von Solarthermischen Und Photovoltaischen Kraftwerken Für Die Versorgungssicherheit, Abschlussbericht*. Stuttgart, Lappeenranta; 2016.
50. BNEF. *New Energy Outlook 2015 - Long-Term Projections of the Global Energy Sector*. London; 2015. <https://about.bnef.com/new-energy-outlook/#form>.
51. Svensson R, Odenberger M, Johnsson F, Ströömberg L. Transportation systems for CO₂—application to carbon capture and storage. *Energy Convers Manag*. 2004;45:2343-2353.
52. Michalski J, Bunger U, Crotogino F, Donadei S, Schneider G, Pregger T. Hydrogen generation by electrolysis and storage in salt caverns: Potentials, economics and systems aspects with regard to the German energy transition. *Int J Hydrogen Energy*. 2017;42:13427-13443.
53. [IEA] - International Energy Agency. *World Energy Outlook 2021*. Paris; 2021.
54. [EC] - European Commission. *The Role of Gas Storage in Internal Market and in Ensuring Security of Supply*. Brussels; 2015. <https://ec.europa.eu/energy/sites/ener/files/documents/REPORT-Gas Storage-20150728.pdf>.
55. Ram M, Child M, Aghahosseini A, Bogdanov D, Poleva A, Breyer C. *Comparing Electricity Production Costs of Renewables to Fossil and Nuclear Power Plants in G20 Countries. Prepared by Lappeenranta University of Technology (LUT) for Greenpeace*. Hamburg; 2017. <http://bit.ly/2u28u0L>.